



NOTES:


Rated Current: 3.0AMP.  
 Contact Resistance: 20mΩ Max.  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min.  
 Operation Temperature: -40℃ to +105℃  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PA9T+3%GF UL94V-0 BK

### Ordering Information

1125-12 XX XX S XXX C 0 XX  
 A3 A2

No. of Pins Contact Plating Pin Length Insulator Packing Series No.  
 Per Row: 02-40 G=Gold Flash L=A+B+2.5 Material 0=PE Bag 01-99  
 G3=10"Gold Standard: 085=8.5 C=PA9T T=Tube  
 G4=15"Gold 095=9.5  
 G5=30"Gold 105=10.5  
 S0=Gold Flash/Tin 116=11.6  
 S3=10"Gold/Tin 118=11.8  
 S4=15"Gold/Tin 135=13.5  
 S5=30"Gold/Tin  
 SN=Tin  
 SM=Matte Tin

Item	Pin Length	A	B	Mating
8.50	3.00	3.00	2135	
9.50	3.00	4.00	2145	
10.50	3.00	5.00	2150	
11.60	3.00	6.10	2171 2185	A2
11.80	2.40	6.90	2171 2185	
13.50	3.00	8.00		

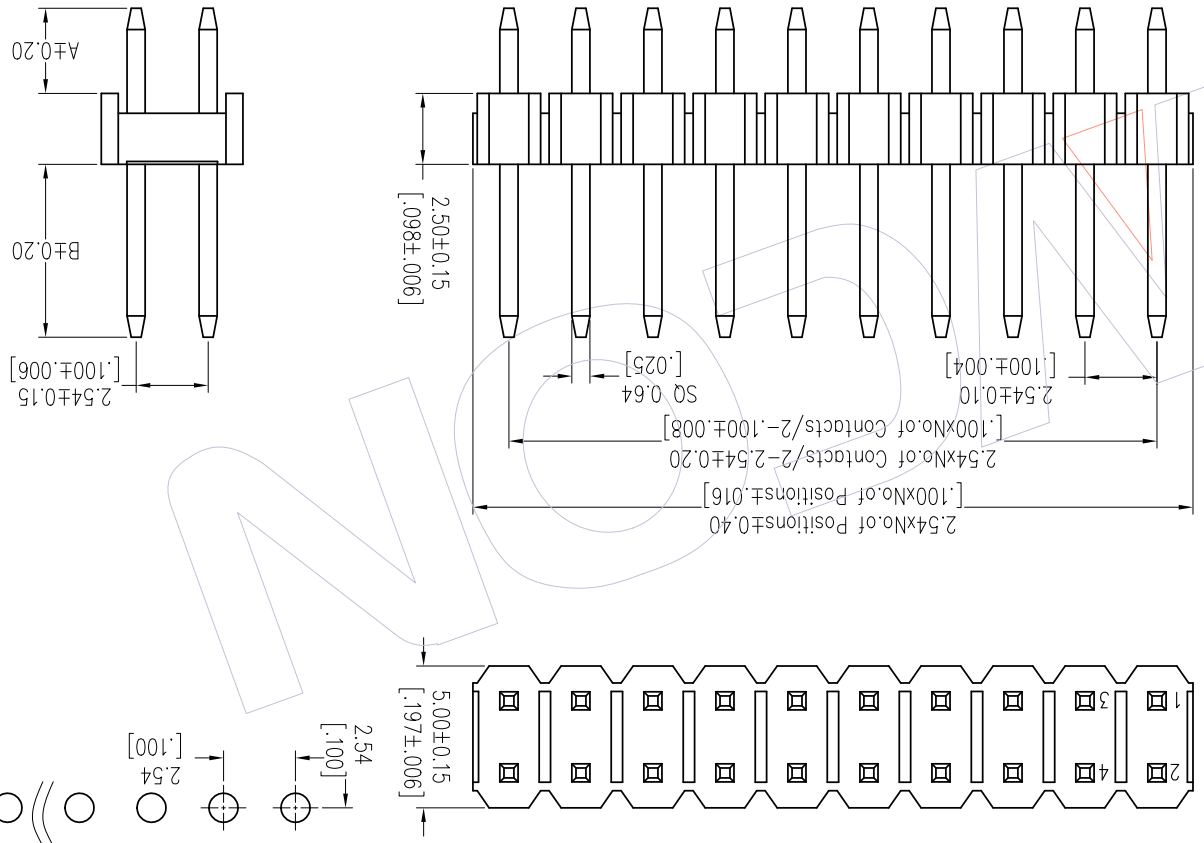

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.	CUSTOMER NO.	WCON-Donguan	WCON-Kunshan
A3	2018/06/02	Cancel PBT & Modify P/N	A3	X.X	±0.40	Surong Xu	2018/06/02	PH2.54 DUAL ROW S/T H=2.5		Tel: +86 769 85358920	Tel: +86 512 57468408
A2	2018/01/22	Modify P/N	A2	X.XX	±0.25	CHECK				Fax: +86 769 85358915	E-mail: sdiesks@wcon.com
A1	2016/02/19	MODIFY DRAWING		X.XXX	±0.15						
A0	2012/05/28	NEW		Angle	±.3	APPROVE					

WCON  
 Http://www.wcon.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Wcon](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)