HSF

NOTES:
Rated Current: 3.0A
Contact Resistance: 20mΩ max
Withstand Voltage: 1000V AC/Minute
Insulation Resistance: 1000MΩ min
Operation Temperature: −25℃ to+85℃

Contact Material: Brass
Contact plating: Au Or Sn Over Ni
Insulator Material: PA66(UL94V−0)

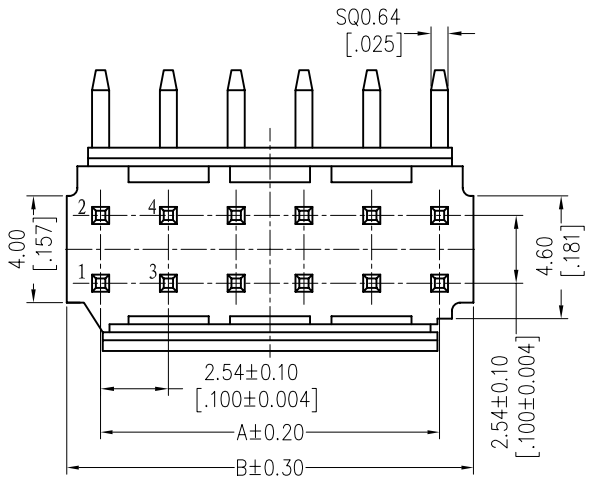

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

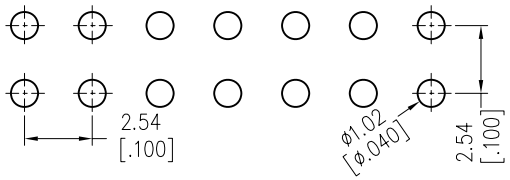

Scale: 1: 2

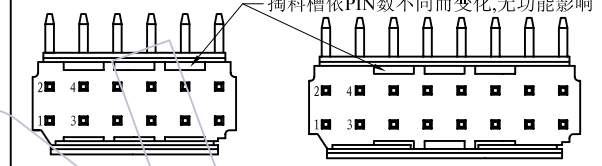

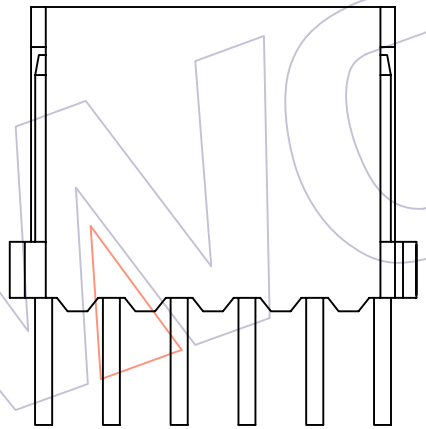

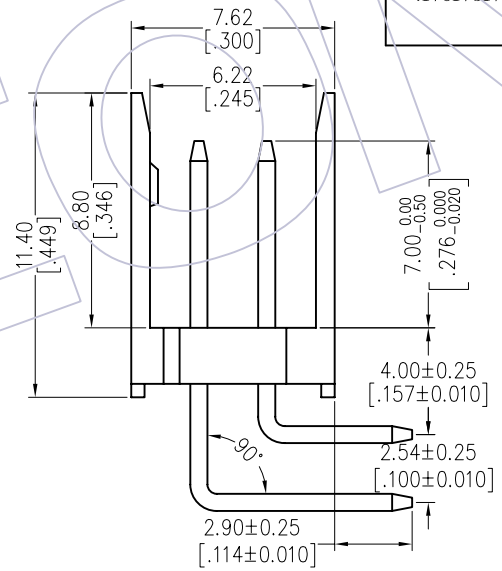

Ordering Information

WF2547 - 2 WR XX XX X X 1

- No.of Row: Dual Row
- No.of pins: 02P~20P
- Contact Plating: S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, Blank=Tin
- Color: W=White, U=Blue, B=Black
- Packing: 0=PE Bag, T=Tube

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
2x02	WF2547−2WR02XX1	2.54	5.08
2x03	WF2547−2WR03XX1	5.08	7.62
2x04	WF2547−2WR04XX1	7.62	10.16
2x05	WF2547−2WR05XX1	10.16	12.70
2x06	WF2547−2WR06XX1	12.70	15.24
2x08	WF2547−2WR08XX1	17.78	20.32
2x10	WF2547−2WR10XX1	22.86	25.40
2x12	WF2547−2WR12XX1	27.94	30.48
2x13	WF2547−2WR13XX1	30.48	33.02
2x15	WF2547−2WR15XX1	35.56	38.10
2x17	WF2547−2WR17XX1	40.64	43.18
2x18	WF2547−2WR18XX1	43.18	45.72
2x20	WF2547−2WR20XX1	48.26	50.80

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/09/08	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	JYHuang	DATE	2012/09/08
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm / inch
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. SEE TAB

TITLE: "T"TYPE 2.54 WAFER 90° DUAL ROW

Customer NO.

WCON
Http: www.wcon.com

WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Headers & Wire Housings ***category:***

Click to view products by Wcon ***manufacturer:***

Other Similar products are found below :

95000-104TRLF 10135584-644402LF DF62W-EP2022PCA 95000-106TRLF DF62W-2022SCA DF62W-EP2022PC 2203348 DF62W-2022SC 1084018 1029039 1084017 802-10-012-10-002000 1112640 1112639 891-007-9SS-BST1T 000-34000 0008550134 0009482033 0009507031 57102-F02-18ULF 57102-S06-03LF 57202-S52-04LF PCN6-15S-2.5E 0039019024 58102-G61-06LF 582553-1 0009485154 0009508121 0022285053 0050291907 018731A LY20-4P-DT1-P1E-BR 02.125.8002.8 60101931 60598-1 (Cut Strip) M1625-3R/100 61062-3 61082-181009 CSU011177004 636-1427 638009-1 641938-9 641991-4 644168-1 644827-2 647662-1 65039-019ELF 65692-001LF 65781-018 65781-047