


**WTL 6/1/STB****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

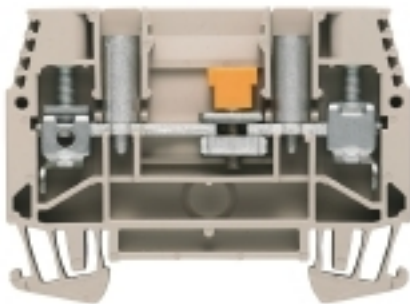**Product image****Current and voltage transformer wiring**

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

**General ordering data**

Version	Test-disconnect terminal, Screw connection, 6 mm <sup>2</sup> , 630 V, 41 A, sliding, dark beige
Order No.	<a href="#">1016900000</a>
Type	WTL 6/1/STB
GTIN (EAN)	4008 190029715
Qty.	50 pc(s).

## WTL 6/1/STB

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	47.5 mm	Depth (inches)	1.87 inch
Depth including DIN rail	48.5 mm	Height	65 mm
Height (inches)	2.559 inch	Width	7.9 mm
Width (inches)	0.311 inch	Net weight	23.92 g

## Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	120 °C		

## Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

## Material data

Material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

## System specifications

Version	Screw connection, Spacer, With sockets, One end without connector	End cover plate required	Yes
Number of potentials	1	Number of levels	1
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	No	PE connection	No
Rail	TS 35	N-function	No
PE function	No	PEN function	No

## 2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)

Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, max.	2.5 mm <sup>2</sup>	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, min.	0.5 mm <sup>2</sup>
Wire connection cross section, finely stranded, two clampable wires, min.	0.5 mm <sup>2</sup>	Wire cross-section, finely stranded, two clampable wires, max.	2.5 mm <sup>2</sup>

## Additional technical data

Explosion-tested version	No	Number of similar terminals	1
Open sides	right	Type of mounting	Snap-on

## CSA rating data

Certificate No. (CSA)	200039-1057876	Current size C (CSA)	45 A
Voltage size C (CSA)	600 V	Wire cross section max. (CSA)	8 AWG
Wire cross section min. (CSA)	20 AWG		

## WTL 6/1/STB

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Conductors for clamping (rated connection)

Blade size	0.8 x 4.0 mm	Clamping range, max.	10 mm <sup>2</sup>
Clamping range, min.	0.5 mm <sup>2</sup>	Clamping screw	M 3.5
Connection cross-section, stranded, max.	10 mm <sup>2</sup>	Connection cross-section, stranded, min.	1.5 mm <sup>2</sup>
Connection direction	on side	Gauge to IEC 60947-1	A5
Number of connections	2	Stripping length	12 mm
Tightening torque, max.	1.6 Nm	Tightening torque, min.	1 Nm
Torque level with DMS electric screwdriver	3	Type of connection	Screw connection
Wire connection cross section AWG, max.	AWG 8	Wire connection cross section AWG, min.	AWG 20
Wire connection cross section, finely stranded, max.	10 mm <sup>2</sup>	Wire connection cross section, finely stranded, min.	0.5 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	6 mm <sup>2</sup>	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	6 mm <sup>2</sup>	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm <sup>2</sup>
Wire connection cross-section, solid core, max.	10 mm <sup>2</sup>	Wire connection cross-section, solid core, min.	0.5 mm <sup>2</sup>

## Dimensions

TS 35 offset	30 mm
--------------	-------

## Disconnect terminals

Cross-disconnect	without	Integral test socket	Yes
Slitting	sliding	Torque max. screw separator	0.7 Nm
Torque min. screw separator	0.5 Nm		

## General

Rail	TS 35	Wire connection cross section AWG, max.	AWG 8
Wire connection cross section AWG, min.	AWG 20		

## Rating data

Rated cross-section	6 mm <sup>2</sup>	Rated voltage	630 V
Rated current	41 A	Current at maximum wires	57 A
Volume resistance according to IEC 60947-7-x	0.78 mΩ	Rated impulse withstand voltage	6 kV
Power loss in accordance with IEC 60947-7-x	1.31 W	Pollution severity	3

## UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	8 AWG
Conductor size Factory wiring min. (UR)	20 AWG	Conductor size Field wiring max. (UR)	8 AWG
Conductor size Field wiring min. (UR)	20 AWG	Current size C (UR)	45 A
Voltage size C (UR)	300 V		

## WTL 6/1/STB

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Classifications

ETIM 6.0	EC000902	ETIM 7.0	EC000902
ETIM 8.0	EC000902	ECLASS 9.0	27-14-11-26
ECLASS 9.1	27-14-11-26	ECLASS 10.0	27-14-11-26
ECLASS 11.0	27-14-11-26		

## Approvals

Approvals



ROHS	Conform
UL File Number Search	E60693

## Downloads

Approval/Certificate/Document of Conformity	<a href="#">CB Test Certificate</a> <a href="#">CB Certificate</a> <a href="#">EAC certificate</a> <a href="#">CE Declaration of Conformity</a> <a href="#">CE Declaration of Conformity all terminals</a>
Engineering Data	<a href="#">CAD data – STEP</a>
Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>
User Documentation	<a href="#">StorageConditionsTerminalBlocks</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>


**Data sheet**

**WTL 6/1/STB**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**



## WTL 6/1/STB

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Switch lock

**Current and voltage transformer wiring**

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

**General ordering data**

Type	SSP 3 SAKT1	Version
Order No.	<a href="#">0531760000</a>	SAK Series, Lockout device
GTIN (EAN)	4008190130787	
Qty.	100 pc(s).	

## QL / SAK 6N



Screwable cross-connections are easy to mount and de mount. Thanks to the big contact surface, even high currents can be transmitted with maximum contact reliability.

**General ordering data**

Type	QL 4 SAK6N	Version
Order No.	<a href="#">0194500000</a>	SAK Series, Cross-connector, for cross-connection link, Number of poles: 4
GTIN (EAN)	4008190025601	
Qty.	50 pc(s).	
Type	QL 10 SAK6N	Version
Order No.	<a href="#">0338300000</a>	SAK Series, Cross-connector, for cross-connection link, Number of poles: 10
GTIN (EAN)	4008190176679	
Qty.	20 pc(s).	
Type	QL 2 SAK6N	Version
Order No.	<a href="#">0194300000</a>	SAK Series, Cross-connector, for cross-connection link, Number of poles: 2
GTIN (EAN)	4008190182854	
Qty.	50 pc(s).	
Type	QL 3 SAK6N	Version
Order No.	<a href="#">0194400000</a>	SAK Series, Cross-connector, for cross-connection link, Number of poles: 3
GTIN (EAN)	4008190063351	
Qty.	50 pc(s).	

**Data sheet**

**WTL 6/1/STB**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Accessories**

**Connection sleeves**



**General ordering data**

Type	VH 19/6/4.2 SAKT1	Version
Order No.	<a href="#">031800000</a>	SAK Series, Connecting sleeve, for cross-connection link, Number of
GTIN (EAN)	4008190059460	poles: 1
Qty.	50 pc(s).	
Type	VH 12/4.9/3.3 SAK6N	Version
Order No.	<a href="#">024900000</a>	SAK Series, Connecting sleeve, for cross-connection link, Number of
GTIN (EAN)	4008190129507	poles:
Qty.	100 pc(s).	

**W-Series**



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

**General ordering data**

Type	WEW 35/2	Version
Order No.	<a href="#">106120000</a>	W-Series, End bracket
GTIN (EAN)	4008190030230	
Qty.	50 pc(s).	

## WTL 6/1/STB

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

# Accessories

## End plate



### Current and voltage transformer wiring

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

### General ordering data

Type	WTW WTL6/1 DB	Version
Order No.	<a href="#">1068400000</a>	W-Series, Partition plate
GTIN (EAN)	4008190091996	
Qty.	20 pc(s).	
Type	WAP WTL6/1	Version
Order No.	<a href="#">1068300000</a>	W-Series, End plate
GTIN (EAN)	4008190088330	
Qty.	20 pc(s).	

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

### General ordering data

Type	DEK 5/8 MC NE WS	Version
Order No.	<a href="#">1856740000</a>	Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00
GTIN (EAN)	4032248400850	Weidmueller, white
Qty.	800 pc(s).	



**WTL 6/1/STB**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Accessories**
**SAK-Series**


A partition plate is used for the optical separation of circuits or used for electrical isolation from neighbouring cross-connectors. In contrast to the end plate, the contour can be larger than the adjacent terminal blocks. However, it should not be smaller, as otherwise the required clearance and creepage distances within the application can no longer be maintained.

**General ordering data**

Type	TSCH 2	Version
Order No.	<a href="#">0353660000</a>	SAK Series, Small partition, beige, 0.6 mm
GTIN (EAN)	4008190128432	
Qty.	100 pc(s).	

**Fixing screws**

**Current and voltage transformer wiring**

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

**General ordering data**

Type	BS 25 IH/GR SAKT1	Version
Order No.	<a href="#">0335300000</a>	SAK Series, Set of fixings
GTIN (EAN)	4008190136864	
Qty.	50 pc(s).	
Type	BS 25 IH/VI SAKT1	Version
Order No.	<a href="#">0335800000</a>	SAK Series, Set of fixings
GTIN (EAN)	4008190039196	
Qty.	50 pc(s).	
Type	BS 25 IH/GE SAKT1	Version
Order No.	<a href="#">0335700000</a>	SAK Series, Set of fixings
GTIN (EAN)	4008190189235	
Qty.	50 pc(s).	
Type	BS 25 IH/GN SAKT1	Version
Order No.	<a href="#">0335600000</a>	SAK Series, Set of fixings
GTIN (EAN)	4008190113490	
Qty.	50 pc(s).	
Type	BS 25 O.IH SAKT1	Version
Order No.	<a href="#">0334700000</a>	SAK Series, Set of fixings
GTIN (EAN)	4008190118839	
Qty.	50 pc(s).	

## WTL 6/1/STB

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

Type	BS 25 IH/RT SAKT1	Version
Order No.	<a href="#">0335500000</a>	SAK Series, Set of fixings
GTIN (EAN)	4008190118877	
Qty.	50 pc(s).	
Type	BS 25 IH/BL SAKT1	Version
Order No.	<a href="#">0335400000</a>	SAK Series, Set of fixings
GTIN (EAN)	4008190086879	
Qty.	50 pc(s).	
Type	BS 25 IH/SW SAKT1	Version
Order No.	<a href="#">0335200000</a>	SAK Series, Set of fixings
GTIN (EAN)	4008190114039	
Qty.	50 pc(s).	
Type	KISC M3X20 SAK 10 CU5	Version
Order No.	<a href="#">0377100000</a>	SAK Series, Mounting screw, Steel
GTIN (EAN)	4008190060350	
Qty.	100 pc(s).	

## Test sockets

**Current and voltage transformer wiring**

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

## General ordering data

Type	STB 25 IH/GE	Version
Order No.	<a href="#">0267200000</a>	SAK Series, Socket
GTIN (EAN)	4008190002862	
Qty.	50 pc(s).	
Type	STB 30.5 IH/GE	Version
Order No.	<a href="#">0341500000</a>	SAK Series, Socket
GTIN (EAN)	4008190130961	
Qty.	50 pc(s).	
Type	STB 25 IH/BL	Version
Order No.	<a href="#">0343400000</a>	SAK Series, Socket
GTIN (EAN)	4008190107192	
Qty.	50 pc(s).	
Type	STB 35 IH/GN	Version
Order No.	<a href="#">0388900000</a>	SAK Series, Socket
GTIN (EAN)	4008190010409	
Qty.	50 pc(s).	
Type	STB 35 IH/VI	Version
Order No.	<a href="#">0389100000</a>	SAK Series, Socket
GTIN (EAN)	4008190137755	
Qty.	50 pc(s).	

Creation date January 12, 2022 11:25:01 AM CET

## WTL 6/1/STB

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

Type	STB 25 IH/SW	Version
Order No.	<a href="#">0271500000</a>	SAK Series, Socket
GTIN (EAN)	4008190030162	
Qty.	50 pc(s).	
Type	STB 30.5 IH/BL	Version
Order No.	<a href="#">0341200000</a>	SAK Series, Socket
GTIN (EAN)	4008190044077	
Qty.	50 pc(s).	
Type	STB 35 IH/GR	Version
Order No.	<a href="#">0388600000</a>	SAK Series, Socket
GTIN (EAN)	4008190140656	
Qty.	50 pc(s).	
Type	STB 30.5 IH/GR	Version
Order No.	<a href="#">0341100000</a>	SAK Series, Socket
GTIN (EAN)	4008190083960	
Qty.	50 pc(s).	
Type	STB 35 IH/BL	Version
Order No.	<a href="#">0388700000</a>	SAK Series, Socket
GTIN (EAN)	4008190082383	
Qty.	50 pc(s).	
Type	STB 30.5 IH/VI	Version
Order No.	<a href="#">0341600000</a>	SAK Series, Socket
GTIN (EAN)	4008190026035	
Qty.	50 pc(s).	
Type	STB 25 IH/GR	Version
Order No.	<a href="#">0271400000</a>	SAK Series, Socket
GTIN (EAN)	4008190029692	
Qty.	50 pc(s).	
Type	STB 30.5 IH/SW	Version
Order No.	<a href="#">0341000000</a>	SAK Series, Socket
GTIN (EAN)	4008190015299	
Qty.	50 pc(s).	
Type	STB 35 IH/GE	Version
Order No.	<a href="#">0389000000</a>	SAK Series, Socket
GTIN (EAN)	4008190396985	
Qty.	50 pc(s).	
Type	STB 25 IH/VI	Version
Order No.	<a href="#">0271300000</a>	SAK Series, Socket
GTIN (EAN)	4008190111342	
Qty.	50 pc(s).	
Type	STB 25 IH/RT	Version
Order No.	<a href="#">0343300000</a>	SAK Series, Socket
GTIN (EAN)	4008190034115	
Qty.	50 pc(s).	
Type	STB 35 IH/RT	Version
Order No.	<a href="#">0388800000</a>	SAK Series, Socket
GTIN (EAN)	4008190177485	
Qty.	50 pc(s).	
Type	STB 30.5 IH/RT	Version
Order No.	<a href="#">0341300000</a>	SAK Series, Socket
GTIN (EAN)	4008190157852	
Qty.	50 pc(s).	

Creation date January 12, 2022 11:25:01 AM CET

## WTL 6/1/STB


**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

Type	STB 30.5 IH/GN	Version
Order No.	<a href="#">0341400000</a>	SAK Series, Socket
GTIN (EAN)	4008190008093	
Qty.	50 pc(s).	
Type	STB 35 IH/SW	Version
Order No.	<a href="#">0388500000</a>	SAK Series, Socket
GTIN (EAN)	4008190089726	
Qty.	50 pc(s).	
Type	STB 25 IH/GN	Version
Order No.	<a href="#">0271200000</a>	SAK Series, Socket
GTIN (EAN)	4008190155889	
Qty.	50 pc(s).	

## Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

Type	WS 12/8 PLUS MC NE WS	Version
Order No.	<a href="#">1906000000</a>	WS, Terminal marker, 12 x 8 mm, Pitch in mm (P): 8.00 Weidmueller,
GTIN (EAN)	4032248528158	white
Qty.	420 pc(s).	

## WTL 6/1/STB

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

## Shorting elements

**Current and voltage transformer wiring**

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

## General ordering data

Type	QVS 3 SAKT1+2	Version
Order No.	<a href="#">0329300000</a>	SAK Series, Cross-connector, Cross-connector, Number of poles: 3
GTIN (EAN)	4008190084714	
Qty.	20 pc(s).	
Type	QVS 4 SAKT1+2	Version
Order No.	<a href="#">0307400000</a>	SAK Series, Cross-connector, Cross-connector, Number of poles: 4
GTIN (EAN)	4008190091941	
Qty.	20 pc(s).	
Type	QVS 2/S SAKT1+2	Version
Order No.	<a href="#">0358460000</a>	SAK Series, Cross-connector, Cross-connector, Number of poles: 2
GTIN (EAN)	4008190157937	
Qty.	20 pc(s).	
Type	QVS 2/4 SAKT4	Version
Order No.	<a href="#">1319260000</a>	SAK Series, Cross-connector, Cross-connector, Number of poles: 2
GTIN (EAN)	4008190136512	
Qty.	20 pc(s).	
Type	QVS 2 SAKT1+2	Version
Order No.	<a href="#">0307300000</a>	SAK Series, Cross-connector, Cross-connector, Number of poles: 2
GTIN (EAN)	4008190036140	
Qty.	20 pc(s).	
Type	QS 2/8/4	Version
Order No.	<a href="#">0270960000</a>	SAK Series, Short-circuit plug, For the terminals, Number of poles: 2
GTIN (EAN)	4008190077006	
Qty.	20 pc(s).	

**DEK 5/8**



**WS/ DEK**

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

**Your benefits with MultiMark**

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

**General ordering data**

Type	DEK 5/8 MM WS	Version	
Order No.	<a href="#">2007130000</a>		Dekafix, Terminal marker, 5 x 8 mm, Weidmueller, white
GTIN (EAN)	4050118392012		
Qty.	500 pc(s).		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Terminal Block Tools & Accessories](#) category:*

*Click to view products by [Weidmuller](#) manufacturer:*

Other Similar products are found below :

[00171430102](#) [00171420102](#) [600HL](#) [600RJ-07](#) [600RJ-11](#) [600RJ-14](#) [600RJS-10](#) [600RJS-12](#) [600RJS-15](#) [600RJS-21](#) [601RJ-09](#) [602SP](#) [602Z](#)  
[604J](#) [CSTSPC1-2](#) [7B941-7](#) [88943-2100](#) [QC102](#) [1437403-6](#) [1437403-9](#) [1437403-8](#) [1453128-1](#) [147832-1](#) [EC0037-000](#) [MT2/H--](#) [MT6/H-N](#)  
[MT6/V-GRND](#) [BC2-12](#) [BCC-1-8/10](#) [EP2.5/4UN/BG](#) [1707755](#) [1735590](#) [1755480](#) [1789281](#) [1840227](#) [1840230](#) [2-1437402-1](#) [JA2-03](#) [JB1-](#)  
[03/J](#) [JB2-04](#) [JB2-05](#) [JB2-07](#) [JB2-09/J](#) [PARALLELJUMPERLINK](#) [JS601](#) [2204082](#) [2302463](#) [2305949](#) [8PCV-BUSHING](#) [8TK2-24](#)