

PRV 4 BL 35X7.5 RT

Weidmüller Interface GmbH & Co. KG


Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

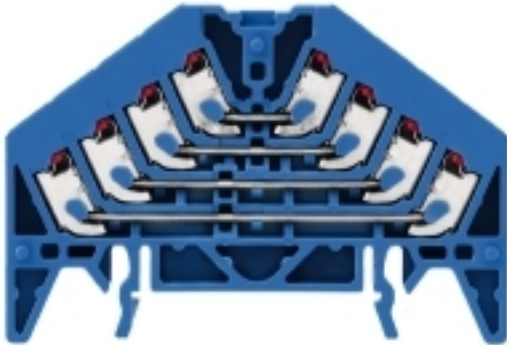

Save space by connecting with these multi-tier terminals with PUSH IN connection technology.

The product line includes the four-channel, eight-channel and also the innovative sixteen-channel feed-through terminal blocks. The four-channel and eight-channel terminals are also available as potential distribution terminals.

The benefits:

- More than 1700 signals per metre can be distributed with the 16-channel terminal block.
- Red and white actuators make it easier to assign wires to their terminal points.
- The PUSH IN connections make wiring quick and convenient.

General ordering data

Version	P-series, Patch distributor, Rated cross-section: 1.5 mm ² , Number of levels: 4, Number of connections: 16, Colour: blue, Colour of operational elements: red, TS 35 x 7.5
Order No.	1267900000
Type	PRV 4 BL 35X7.5 RT
GTIN (EAN)	4032248112807
Qty.	20 pc(s).

PRV 4 BL 35X7.5 RT

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	47 mm	Depth (inches)	1.85 inch
Height	70 mm	Height (inches)	2.756 inch
Width	9.2 mm	Width (inches)	0.362 inch
Net weight	23.55 g		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50
Continuous operating temp., max.	130		

Material data

Material	Polycarbonate	Material of operational elements	PBT
Colour	blue	Colour of operational elements	red
UL 94 flammability rating	V-0		

System specifications

Version	PUSH IN connection, One end without connector	End cover plate required	Yes
Number of levels	4	Number of clamping points per level	4
Number of potentials per tier	4	Levels cross-connected internally	No
PE connection	No	Rail	TS 35 x 7.5

Additional technical data

Type of mounting	Snap-on
------------------	---------

CSA rating data

Certificate No. (CSA)	200039-2406089	Current size B (CSA)	10 A
Current size D (CSA)	10 A	Voltage size B (CSA)	300 V
Voltage size D (CSA)	300 V	Wire cross section max. (CSA)	16 AWG
Wire cross section min. (CSA)	26 AWG		

PRV 4 BL 35X7.5 RT

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Conductors for clamping (rated connection)

Blade size	0.6 x 3.5 mm	Clamping range, max.	1.5 mm ²
Clamping range, min.	0.13 mm ²	Connection cross-section, stranded, max.	1.5 mm ²
Connection cross-section, stranded, min.	0.5 mm ²	Connection direction	Inclined / angled
Number of connections	16	Stripping length	10 mm
Type of connection	PUSH IN	Wire connection cross section AWG, max.	AWG 16
Wire connection cross section AWG, min.	AWG 24	Wire connection cross section, finely stranded, max.	1.5 mm ²
Wire connection cross section, finely stranded, min.	0.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	1.5 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	1.5 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm ²	Wire connection cross-section, solid core, max.	1.5 mm ²
Wire connection cross-section, solid core, min.	0.5 mm ²		

General

Rail	TS 35 x 7.5	Wire connection cross section AWG, max.	AWG 16
Wire connection cross section AWG, min.	AWG 24		

Rating data

Rated cross-section	1.5 mm ²	Rated voltage	250
Rated current	10 A	Current at maximum wires	13 A
Volume resistance according to IEC 60947-7-x	1.83 mΩ	Rated impulse withstand voltage	4 kV
Power loss in accordance with IEC 60947-7-x	0.56 W	Pollution severity	3
Surge voltage category	III		

UL rating data

Certificate No. (cURus)	E60693	Current size B (cURus)	10 A
Current size D (cURus)	10 A	Voltage size B (cURus)	300 V
Voltage size D (cURus)	300 V	Wire cross section max. (cURus)	16 AWG
Wire cross section min. (cURus)	26 AWG		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ECLASS 9.0	27-14-11-20
ECLASS 9.1	27-14-11-20	ECLASS 10.0	27-14-11-20
ECLASS 11.0	27-14-11-20		

Creation date January 22, 2022 6:46:08 AM CET

Catalogue status 14.01.2022 / We reserve the right to make technical changes.

3

Data sheet

PRV 4 BL 35X7.5 RT

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS	Conform
UL File Number Search	E60693

Downloads

Approval/Certificate/Document of Conformity	EAC certificate Declaration of Conformity CE Declaration of Conformity all terminals
Engineering Data	CAD data – STEP
Engineering Data	EPLAN, WSCAD, Zuken E3.S
User Documentation	Beipackzettel_PRV_PPV.pdf Usage of terminals in EXi atmospheres StorageConditionsTerminalBlocks
Catalogues	Catalogues in PDF-format
Brochures	


Data sheet

PRV 4 BL 35X7.5 RT

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings



PRV 4 BL 35X7.5 RT

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

End plates




DCS marshalling

Our innovative PRV terminal blocks for DCS marshalling featuring a PUSH IN connection and our multifunctional DCS marshalling terminals featuring a screw connection (WMF) not only save space in the panel; they also guarantee more effective signal transmission in process control systems.

General ordering data

Type	PAP PRV/PPV4 GR	Version
Order No.	1211450000	P-series, End plate, grey, 3 mm
GTIN (EAN)	4032248992867	
Qty.	10 pc(s).	
Type	PAP PRV/PPV4 SW	Version
Order No.	1173750000	P-series, End plate, black, 3 mm
GTIN (EAN)	4032248966165	
Qty.	10 pc(s).	
Type	PAP PRV/PPV4 BL	Version
Order No.	1268010000	P-series, End plate, blue, 3 mm
GTIN (EAN)	4032248112999	
Qty.	10 pc(s).	

Z-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

General ordering data

Type	ZEW 35/2 SW	Version
Order No.	1162610000	Z-series, End bracket
GTIN (EAN)	4032248962716	
Qty.	20 pc(s).	

PRV 4 BL 35X7.5 RT

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	WS 7.8/9.2 PLUS MC NE GR	Version
Order No.	1208970000	WS, Terminal marker, 7.8 x 9.2 mm, Pitch in mm (P): 9.20
GTIN (EAN)	4032248990092	Weidmueller, grey
Qty.	360 pc(s).	

Slotted screwdriver



Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip

General ordering data

Type	SDS 0.4X2.0X60	Version
Order No.	2749260000	Screwdriver, Blade width (B): 2 mm, Blade length: 60 mm, Blade thickness (A): 0.4 mm
GTIN (EAN)	4050118895537	
Qty.	1 pc(s).	

Data sheet

PRV 4 BL 35X7.5 RT

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

Marking holder



DCS marshalling

Our innovative PRV terminal blocks for DCS marshalling featuring a PUSH IN connection and our multifunctional DCS marshalling terminals featuring a screw connection (WMF) not only save space in the panel; they also guarantee more effective signal transmission in process control systems.

General ordering data

Type	BZT PRV4 SW 35X7.5	Version
Order No.	117360000	P-series, Marker holder, black, Number of levels: 4, TS 35 x 7.5
GTIN (EAN)	4032248966226	
Qty.	20 pc(s).	
Type	BZT PRV4 BL 35X7.5	Version
Order No.	126799000	P-series, Marker holder, blue, Number of levels: 4, TS 35 x 7.5
GTIN (EAN)	4032248112913	
Qty.	20 pc(s).	

Cross-connection for socket with PUSH IN connection

Cross-connection for the sockets in the RIDERSERIES RCI.



General ordering data

Type	SRC-I QV P	Version
Order No.	887084000	RIDERSERIES RCI, Cross-connector
GTIN (EAN)	4032248631681	
Qty.	10 pc(s).	

PRV 4 BL 35X7.5 RT

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

Partition plates

**DCS marshalling**

Our innovative PRV terminal blocks for DCS marshalling featuring a PUSH IN connection and our multifunctional DCS marshalling terminals featuring a screw connection (WMF) not only save space in the panel; they also guarantee more effective signal transmission in process control systems.

General ordering data

Type	TW PRV4	Version
Order No.	1173700000	P-series, Partition plate, grey, 2 mm, Unprinted
GTIN (EAN)	4032248966134	
Qty.	10 pc(s).	
Type	TW PRV4 0-3	Version
Order No.	1230060000	P-series, Partition plate, grey, 2 mm, Printed 0-3, horizontally
GTIN (EAN)	4050118013733	
Qty.	10 pc(s).	
Type	TW PRV4 A-D	Version
Order No.	1230070000	P-series, Partition plate, grey, 2 mm, Printed A-D, horizontally
GTIN (EAN)	4050118013764	
Qty.	10 pc(s).	
Type	TW PRV4 1-4	Version
Order No.	1230050000	P-series, Partition plate, grey, 2 mm, Printed 1-4, horizontally
GTIN (EAN)	4050118013818	
Qty.	10 pc(s).	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [734-104](#) [734-302](#) [8-141-P](#) [8426620000](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP03-3,50](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFH16150](#) [ELFP03110](#) [ELFP10210](#) [ELFT06250](#) [ELVP03100](#) [1700101](#) [1700410](#) [1700425](#) [1702246](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#) [1734692](#) [1734795](#) [1736036](#) [1740194](#) [1740291](#) [1740628](#) [1740990](#) [1746952](#) [1750207](#) [1752441](#) [1752865](#) [1754115](#) [1754144](#) [1756913](#) [1760051](#)