

**IE-MC-VLT-1TX-1ST****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image****Industrial Fast Ethernet media converter**

- 10/100BaseT(X) auto-negotiation and auto MDI/MDI-X
- Link Fault Pass-Through (LFP)
- Warning in event of power failure and port failure
- Redundant power supply inputs
- -40 to 75 °C operating temperature (T models)
- Designed for explosive-risk areas (Class 1 Div. 2/Atex Zone 2)

**General ordering data**

Version	Media converter, Fast Ethernet, Number of ports: 1x RJ45, 1 * ST Multi-mode, IP30, -40 °C...75 °C
Order No.	<a href="#">1286890000</a>
Type	IE-MC-VLT-1TX-1ST
GTIN (EAN)	4050118077827
Qty.	1 pc(s).

Creation date September 16, 2022 3:04:07 AM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

## IE-MC-VLT-1TX-1ST

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	105 mm	Depth (inches)	4.134 inch
Height	135 mm	Height (inches)	5.315 inch
Width	53.6 mm	Width (inches)	2.11 inch
Net weight	630 g		

## Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...75 °C
Humidity	5 to 95 % (non-condensing)		

## Environmental Product Compliance

REACH SVHC	Lead 7439-92-1	SCIP	b14ea46f-06a9-4191-9f88-14cc6c04
------------	----------------	------	----------------------------------

## EMC conformity and approvals

EMC standards	EN 55032, EN 55024, CISPR 32, FCC Part 15 Subpart B Class A, IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV, IEC 61000-4-3 RS: 80 MHz bis 1 Ghz: 3 V/m, IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV, IEC 61000-4-5 Surge: Power: 1 kV; Signal: 1 kV, IEC 61000-4-6 CS: 3 V/m, IEC 61000-4-8, IEC 61000-4-11	Explosive risk zone	UL/cUL, Class I, Division 2, Groups A, B, C and D, ATEX Zone 2 Ex nA nC IIC T4 Gc
Free fall	According to IEC 60068-2-32	Safety standard	UL508, UL 60950-1, EN 60950-1
Ship use	DNV-GL	Shock	according to IEC 60068-2-27
Vibration	according to IEC 60068-2-6		

## Environmental conditions

Humidity	5 to 95 % (non-condensing)	Operating temperature, max.	75 °C
Operating temperature, min.	-40 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-40 °C		

## Fibre optic transceiver characteristics

Transmission rate	100 Mbps
Transceiver type	Multimode
Connector type	ST-Duplex
Transmission distance, typ.	5 km

## IE-MC-VLT-1TX-1ST

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

Wavelength	typ.	1,300 nm
	Wavelength	TX
	min.	1,260 nm
	max.	1,360 nm
	Wavelength	RX
	min.	1,100 nm
	max.	1,600 nm
Link-budget	12 dB	

## Guarantee

Time interval	5 years
---------------	---------

## Interfaces

Alarm contact	1 relay output with a current capacity of 1 A at 24 V DC	Fibre-optic ports	100BaseFX ports (ST connector), Multimode
Function DIP switch	100BaseFX full-/half-duplex mode, Port surveillance	LED indicator	PWR1, PWR2, FAULT, 10/100M (TP-Port), 100M (fibre-optic port), FDX/ COL (Fibre port)
Number of ports	1x RJ45, 1 * ST Multimode	RJ45 ports	10/100BaseT(X)

## MTBF

MTBF	According to Standard	MIL-HDBK-217F, GB 25°C
	Operating time (hours), min.	401,000 h

## Power supply

Connection type	1 removable 6-pin terminal block		
Current consumption	Voltage	12 V DC	
	Current	0.32 A	
	Voltage	24 V DC	
	Current	0.16 A	
Overload current protection	1.1 A		
Reverse polarity protection	Available		
Voltage supply	24 V DC, 2 redundant inputs		
Voltage supply range	Voltage type	DC	
	Voltage, min.	12 V	
	Voltage, max.	45 V	

## Technical data

Housing main material	metal	Protection degree	IP30
Speed	Fast Ethernet	Type of mounting	DIN rail, Panel (with optional mounting kit)

## Technology

Standard	IEEE 802.3 for 10BaseT, IEEE 802.3u for 100BaseT(X) and 100BaseFX
----------	---

Creation date September 16, 2022 3:04:07 AM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

3

## IE-MC-VLT-1TX-1ST

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com


## Technical data

## Classifications

ETIM 6.0	EC001467	ETIM 7.0	EC001467
ETIM 8.0	EC001467	ECLASS 9.0	19-17-01-14
ECLASS 9.1	19-17-01-14	ECLASS 10.0	19-17-01-32
ECLASS 11.0	19-17-01-32	ECLASS 12.0	19-17-01-32

## Approvals

Approvals

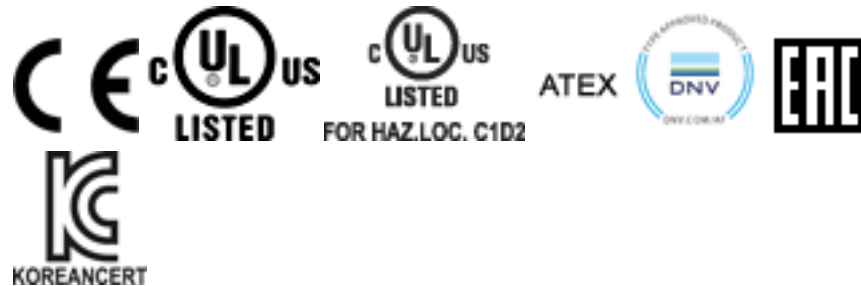

ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E230683
Certificate no. (cULusEX)	E223527

## Downloads

Approval/Certificate/Document of Conformity	<a href="#">DNV certificate</a> <a href="#">ATEX certificate</a> <a href="#">KC certificate</a> <a href="#">EU Declaration of Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
User Documentation	<a href="#">Hardware Installation Guide</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Media Converters](#) category:*

*Click to view products by [Weidmuller](#) manufacturer:*

Other Similar products are found below :

[CF-020010-264](#) [RSM3485PCT](#) [CAN-BUS-XL2515](#) [CTM1051KAT](#) [TD322D485H-A](#) [CTM1051KT](#) [TD322DCAN](#) [TD301D485H](#)  
[CTM8251KD](#) [CTM8251KAT](#) [RSM3485IDHT](#) [RSM3485CT](#) [CTM8251KT](#) [RSM485IDHT](#) [CTM1051T](#) [TD501D485H-E](#) [RSM485ECHT](#)  
[TD501DCANH3](#) [TD501DCAN](#) [CTM8251AT](#) [TD301D485H-A](#) [TD301DCAN](#) [TD522DCAN](#) [TD321D485H-A](#) [RSM485PHT](#) [RSM485PCT](#)  
[TD522D485H-A](#) [CTM8251KAD](#) [TD501D485H](#) [RSM3485IQHT](#) [CTM1051AMG](#) [CTM1051MG](#) [RSM485LECHT](#) [SC1510R](#) [CSM300](#)  
[CTM8251AT](#) [TD302DCAN](#) [TD301MCAN](#) [CTM1051M](#) [TD301MCANFD](#) [TD301DCAN](#) [CTM1051](#) [CTM1051T](#) [TD322DCAN](#)  
[TD301DCANH3](#) [TD522DCAN](#) [CTM1051AT](#) [CTM1051AMG](#) [CTM8251T](#) [CTM1051KT](#)