

SAIS-8/9

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



Individual cable lengths are often required nowadays. In order to meet these demands, Weidmüller offers a wide range of plug-in connectors for custom assembly.

Male plugs and female socket for customisable assembly for M8, M12, M16 and 7/8" connections which are highly robust and ideally suited to machine engineering, for instance. The M12 plug-in connectors offer a choice of 5 different connection systems.

The screw connection can be used in a wide range of applications. With this technology the conductor, optionally with wire-end ferrules, can be plugged into connection elements and secured with a screw. It is the classic, cheapest form of connection technology that also supports multi-conductor connections.

General ordering data

Type	SAIS-8/9
Order No.	1836970000
Version	Plugs prefabricated to customer spec., M12, pin, straight
GTIN (EAN)	4032248345229
Qty.	1 pc(s).

SAIS-8/9

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Net weight 23.2 g

Temperatures

Operating temperature range, max.	85 °C	Operating temperature range, min.	-25 °C
Operating temperature, max.	85 °C	Operating temperature, min.	-40 °C

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

Technical data customisable plug-in connectors

Cable diameter, max.	8 mm	Cable diameter, min.	6 mm
Cable glands	PG 9	Coding	A
Connection cross-section, max.	0.5 mm ²	Connection cross-section, min.	0.14 mm ²
Contact surface	Gold-plated	Housing main material	PA
Insulation strength	10 ⁸ Ω	Number of poles	8
Plugging cycles	≥ 50	Pollution severity	3
Protection degree	IP67	Rated current	2 A
Rated voltage	60 V	Shield connection	No
Temperature range of housing	-40 ... +85 °C	Threaded ring material	Diecast zinc
Type of connection	Screw connection		

Standards

Connector standard IEC 61076-2-101 Certificate No. (cURus) E307231

Classifications

ETIM 6.0	EC002062	ETIM 7.0	EC002635
eClass 9.0	27-44-01-02	eClass 9.1	27-44-01-03
eClass 10.0	27-44-01-02	UNSPSC	30-21-18-10

Approvals

Approvals



ROHS Conform

Downloads


Brochure/Catalogue [CAT 8 SAI 15/16 EN](#)
[FL FIELDWIRING EN](#)
 Engineering Data [WSCAD](#)
 User Documentation [Manual](#)

SAIS-8/9

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Pole scheme

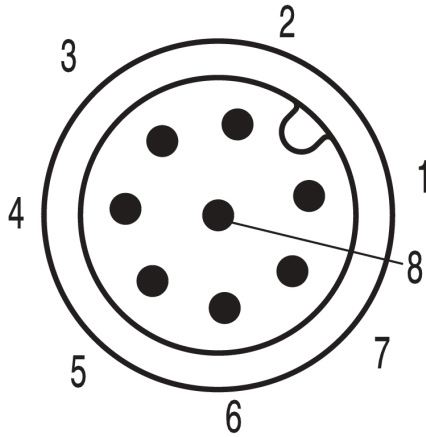

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [weidmuller](#) manufacturer:

Other Similar products are found below :

[8924550000](#) [56956](#) [0133660000](#) [6720000227](#) [6720005111](#) [68676](#) [69718](#) [EXO24CH](#) [7940000218](#) [8005181001](#) [8008180000](#) [8432240000](#)
[8463580000](#) [8545830000](#) [8689870000](#) [8705640000](#) [8869870000](#) [9001080000](#) [9003720000](#) [9004250000](#) [9004780000](#) [9013260000](#)
[9014100000](#) [9019040000](#) [9026010000](#) [9028630000](#) [903708](#) [9037350000](#) [9046290000](#) [9129643500](#) [913155](#) [9159530000](#) [919656](#) [919764](#)
[9202230000](#) [9202850000](#) [9204260000](#) [9456750000](#) [9457913000](#) [980811](#) [980826](#) [9912800003](#) [9916080000](#) [9916280012](#) [9918380000](#)
[9919371205](#) [9919371224](#) [9925710000](#) [9926252005](#) [9927480024](#)