

**WIL-LWXXXX-6500D024-765SXX0.3BM12GXXXX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



The WIL-LED lights family: Only 8mm (9.4mm with magnet) high LED lamp for 24V DC with very high luminous efficacy and high lifespan (greater 60 000h). Very robust construction, by full potting and metal housing - waterproof (IP67). Due to its 6500K light color (daylight) suitable for the various applications. Optionally easily connectable with M12 connection. Due to the low power consumption, a small enough power supply with 24V for operation.

**General ordering data**

Order No.	<a href="#">2535890000</a>
Type	WIL- LWXXXX-6500D024-765SXX0.3BM12GXXXX
GTIN (EAN)	4050118547559
Qty.	1 pc(s).

Creation date September 18, 2022 12:18:03 AM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

WIL-LWXXXX-6500D024-765SXX0.3BM12GXXXX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

Depth	40 mm	Depth (inches)	1.575 inch
Height	8 mm	Height (inches)	0.315 inch
Width	765 mm	Width (inches)	30.118 inch
Net weight	550 g		

### Temperatures

Operating temperature	-20 - 60°C
-----------------------	------------

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1	SCIP	bf1e8170-69bb-4440-b3e0-4da351a9a3b0
------------	----------------	------	--------------------------------------

### Cable technical specifications

Cable Material	PUR	Sheathing colour	black
Housing main material	hard anodised aluminium	Cable length	0.3 m
Core cross-section	0.34 mm <sup>2</sup>		

### Connection data

Version	pin, straight	Coding	A
Connection thread	M12	Tightening torque	0.8 Nm
Wiring	Pin 4 (Strand: black) control white LED, Pin 3 (Strand: blue)		

### Electric data

Rated voltage	24 V DC	Rated current	1.07 A
Power	25.7 W	Dimmable	Yes

### General technical data

Electronic equipment on rolling stock	No	Recommended class according to UL for use of an power supply	NEC Class 2
Shape of the LED module	Rectangular	Type of connection	Pre-assembled cable
Number of LEDs	147	Light colour (CCT)	6500K, White
Luminosity	3,470 cd	Light current	2,177 lm
Emitting angle	40 °	Illumination level	749 lux
Operating life	60.000 h	Type of mounting	Screw mounting
Drill hole spacing	750 mm	Impact resistance	IK05
Protection degree	IP67		

### Material data

Housing main material	hard anodised aluminium	Encapsulation compound	PUR V0
Threaded ring material	PA	Material of end caps	Diecast zinc, nickel-plated

**WIL-LWXXXX-6500D024-765SXX0.3BM12GXXXX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Classifications

ETIM 6.0	EC000996	ETIM 7.0	EC000996
ETIM 8.0	EC000996	ECLASS 9.1	27-11-06-35
ECLASS 10.0	27-11-06-35	ECLASS 11.0	27-11-06-35
ECLASS 12.0	27-11-06-35		

### Approvals

Approvals



ROHS

Conform

### Downloads

Engineering Data	<a href="#">CAD data – STEP</a>
User Documentation	<a href="#">Designation key WIL</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>


**WIL-LWXXXX-6500D024-765SXX0.3BM12GXXXX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

**Dimensioned drawing**

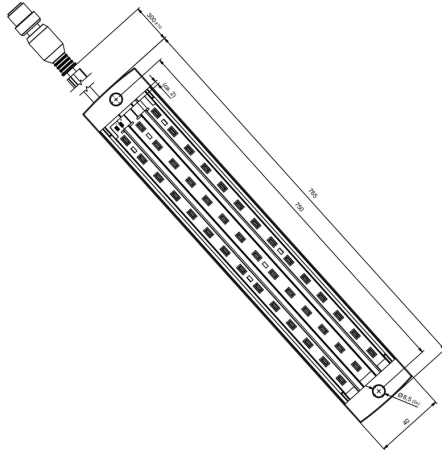

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Lighting Bars and Strips category](#):*

*Click to view products by [Weidmuller manufacturer](#):*

Other Similar products are found below :

[ZLF0310W62524](#) [LF1D-F2F-2W-300](#) [LFBLL-SW823-24V-8S125-20](#) [LFBLL-SW927-24V-8S125-20](#) [LFBLL-SW930-24V-8S125-20](#)  
[LFBHL-SW927-24V-8S63-20](#) [LFBHL-SW930-24V-8S63-20](#) [RF-G30HI3510-241202081-A0 IP20](#) [RF-GW2H39W19-2406020I1-A1 IP20](#)  
[HH-SX72F008W24-2835 CW WHITE PCB IP20](#) [HH-SX180F010W24 -2835 WW WHITE PCB IP20](#) [HH-SX72F008W24-2835 NW WHITE PCB IP20](#)  
[HH-SX144F008W24 -2835 NW WHITE PCB IP20](#) [HH-SX144F008W24 -2835 CW WHITE PCB IP20](#) [HH-SX72F008W24-2835 WW WHITE PCB IP20](#)  
[HH-SX144F008W24 -2835 WW WHITE PCB IP20](#) [HH-SX180F010W24 -2835 CW WHITE PCB IP20](#)  
[N004120BB1LZ \(BLUE\)](#) [N004120BB1LZ \(6000K\)](#) [N004120BB1LZ \(4000K\)](#) [N008120BB1LZ \(BLUE\)](#) [S004060TTB3PZ/C2](#)  
[S008144CA4SA1/C1 \(RGB+6000K IP20\)](#) [S008144CA4SA1/C1 \(RGB+3000K IP20\)](#) [S012070CA4SA1 \(RGB+4000K IP20\)](#) [S0121134ZC3PZ](#)  
[00219015](#) [HC-F12V-3535 PCBA](#) [HC-F12V-F50-3L-WS2811](#) [HC-F5V-144L-144LED-B-WS2813 IP20](#) [HC-F5V-144L-144LED-B-WS2813 IP65](#)  
[HC-F5V-144L-144LED-W/IP65](#) [HC-F5V-144L-144LED-W-WS2813 IP20](#) [HC-F5V-30L-30LED-B-WS2813 IP20](#) [HC-F5V-30L-30LED-W-WS2813 IP20](#)  
[HC-F5V-60L-60LED-B-WS2813 IP20](#) [HC-F5V-60L-60LED-W-WS2813 IP65](#) [HC-T12V-10L-30LED-W/IP20](#)  
[HC-T12V-16L-48LED-W/IP20](#) [HC-T12V-16L-48LED-W/IP65](#) [HC-T12V-20L-60LED-W/IP65](#) [LFBLL-SW860-24V-5S200-20-IC](#) [LS-2835W120RN](#)  
[LS-2835W120RN1](#) [LS-2835W60RN2](#) [LS-2835WW60RN](#) [LS-3014WW60RN](#) [LS-3014WW60RN3](#) [LS-3528W60RN-2](#) [LS-5050F60R-2](#)