

## VPU AC II US 3 R 600/35

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

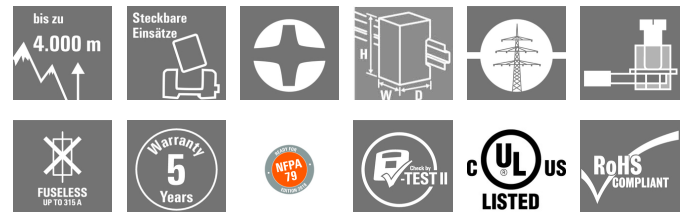


Abb.ähnlich

- compact SPD to install in application by NFPA 79
- no additional overcurrent protection devices needed
- short circuit current rating (SCCR) up to 200 kA
- tested according to IEC/EN 61643-11 and UL 1449 4.Ed

### General ordering data

Version	Surge voltage arrester, Low voltage, Surge protection, with remote contact, TN-C, U <sub>p</sub> (L/N-PE) ≤ 3,4 kV
Order No.	<a href="#">2730780000</a>
Type	VPU AC II US 3 R 600/35
GTIN (EAN)	4050118807325
Qty.	1 Stück

Erstellungs-Datum February 18, 2021 9:40:00 PM CET

Katalogstand 12.02.2021 / Technische Änderungen vorbehalten

## VPU AC II US 3 R 600/35

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technische Daten

### Dimensions and weights

Depth	68 mm	Depth (inches)	2.677 inch
Depth including DIN rail	76 mm	Height	104.5 mm
Height (inches)	4.114 inch	Mounting dimension - height	75 mm
Net weight	160 g	Width	54 mm
Width (inches)	2.126 inch		

### Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
Humidity	5 - 95% rel. humidity		

### Rated data UL

Operating altitude	≤ 4000 m	Ambient temperature (operational), max.	85 °C
Rated Voltage U <sub>N</sub>	600 V	SCCR	200 kA
I <sub>n</sub>	20 kA	Category	SPD TYPE 1CA
Connection cross-section AWG, min.	AWG 14	Connection cross-section AWG, max.	AWG 6
Ambient temperature (operational), min.	-40 °C	MODE	all modes
VPR (L-L)	5,000 V	VPR (L-PE)	2,500 V
Voltage type	AC	UL Energy Networks	3-phase WYE

### Connection data, remote alert

Connection type	PUSH IN	Cross-section for connected wire, solid core, max.	1.5 mm <sup>2</sup>
Cross-section for connected wire, solid core, max. (AWG)	AWG 10	Cross-section for connected wire, solid core, min.	0.14 mm <sup>2</sup>
Cross-section for connected wire, solid core, min. (AWG)	AWG 30	Stripping length	12 mm

### General data

Colour	orange, black	Design	Installation housing, Insta IP 20
Operating altitude	≤ 4000 m	Optical function display	green = OK; red = arrester is defective - replace
Protection degree	IP20 in installed state	Rail	TS 35
Segment	Power distribution	UL 94 flammability rating	V-0
Version	Surge protection, with remote contact		

### Insulation coordination acc. to EN 50178

Operating altitude	≤ 4000 m	Pollution severity	2
Surge voltage category	III		

## VPU AC II US 3 R 600/35

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technische Daten

### Rated data IEC / EN

Discharge current $I_{max}$ (8/20 $\mu$ s) wire-PE	35 kA	Discharge current $I_n$ (8/20 $\mu$ s) wire-PE	20 kA
Energy coordination ( $\leq 10$ m)	Type II, Type III	Follow-on current extinguishing capability $I_{fi}$	Follow current need not be taken into account
Frequency range, max.	60 Hz	Frequency range, min.	50 Hz
Fuse	No Fuse necessary $\leq 315$ A gG, 250 A gG @50 kA I <sub>sc</sub> cr, 315 A gG @25 kA I <sub>sc</sub> cr	Leakage current at $U_n$	0.7 mA
Low voltage network	TN-C	Mains voltage	400 V / 690 V
Max. continuous voltage, $U_c$ (AC)	750 V	Number of poles	3
Protection level $U_p$ (typ.)	$\leq 3,4$ kV	Rated voltage (AC)	690 V
Requirements category acc. to IEC 61643-11	Type II	Requirements class, acc. to EN 61643-11	T2
Response time	$\leq 25$ ns	SPD type	T2
Short-circuit current rating $I_{SCCR}$	50 kA	Signalling contact	250 V 1A 1CO
Standards	IEC61643-11, EN61643-11, UL 1449 Ed.4, NFPA 79	Temporary surge voltage (over-voltage) - TOV	871 V
Voltage type	AC		

### Connection data

Wire connection method	Screw connection	Type of connection	Screw connection
Stripping length, rated connection	18 mm	Tightening torque, min.	2 Nm
Tightening torque, max.	4.5 Nm	Clamping range, rated connection	16 mm <sup>2</sup>
Clamping range, min.	4 mm <sup>2</sup>	Clamping range, max.	35 mm <sup>2</sup>
Wire connection cross section AWG, min.	AWG 14	Wire connection cross section AWG, max.	AWG 6
Wire cross-section, solid, min.	2.5 mm <sup>2</sup>	Wire cross-section, solid, max.	35 mm <sup>2</sup>
Wire connection cross section, finely stranded, min.	4 mm <sup>2</sup>	Wire connection cross section, finely stranded, max.	35 mm <sup>2</sup>
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	2.5 mm <sup>2</sup>	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	35 mm <sup>2</sup>
Connection cross-section, stranded, min.	2.5 mm <sup>2</sup>	Connection cross-section, stranded, max.	35 mm <sup>2</sup>

### Ratings IECEx/ATEX/cUL

Certificate no. (cULus) E354261

### Guarantee

Time interval 5 years

### Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ECLASS 9.0	27-13-08-05	ECLASS 9.1	27-13-08-05
ECLASS 10.0	27-13-08-05	ECLASS 11.0	27-13-08-05

## VPU AC II US 3 R 600/35

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technische Daten

### Approvals

Approvals



ROHS	Conform
UL File Number Search	E354261

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">Declaration of Conformity</a>
Engineering Data	<a href="#">STEP</a>
User Documentation	<a href="#">IS VPU AC II US</a>


**VPU AC II US 3 R 600/35**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Zeichnungen**

**Electric symbol**

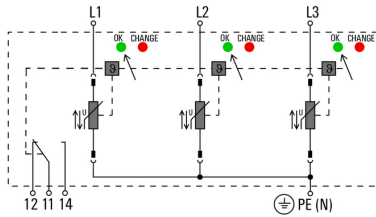

Schematic circuit diagram

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Surge Suppressors](#) category:*

*Click to view products by [Weidmuller](#) manufacturer:*

Other Similar products are found below :

[GUS1](#) [GUS12](#) [BSPM1A600D600LVR](#) [2800521](#) [29-2053](#) [GUS11](#) [GUS2](#) [GUS3](#) [GUS4](#) [30460](#) [SRA64C060X](#) [PC642C015](#) [1810-15-A3](#)  
[2713175](#) [4B06B-EC1-150LF](#) [SRA6LC](#) [BPMA75D100LV](#) [CX06M](#) [CCTV1](#) [GUS13](#) [GUS14](#) [GUS5](#) [GUS6](#) [VAL-MS 320/3+0-FM](#) [VAL-US-](#)  
[120/40/1+1-FM](#) [VAL-US-120/65/1+1-FM](#) [VAL-US-480D/30/3+0-FM](#) [VAL-US-120/40/1+0-FM](#) [STCHSP121BT1RU](#) [LP-BFDN-CW](#) [LP-](#)  
[STRL-NFF](#) [LP-STRL-DFE](#) [GUS22](#) [0804111](#) [5053609](#) [5053201](#) [SPD2-150-1P0](#) [SPD2-550-1P0](#) [6720005416](#) [6720005417](#) [1-2191595-2](#)  
[STC-CAT6-P0E-I](#) [SPD2-350-1P0](#) [FLT-CP-350-ST](#) [TTC-6P-3-HF-F-M-12DC-UT-I](#) [SMTPA200](#) [2800989](#) [2906776](#) [2906810](#) [2906847](#)