

MCZ PT100/3 CLP 0...100C

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold


Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Product image

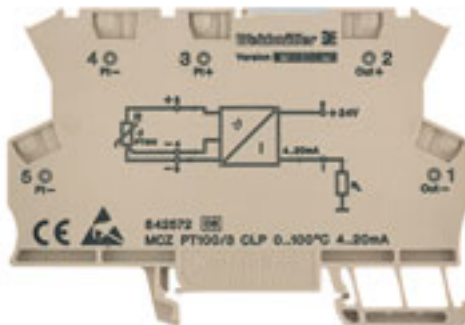

MCZ: The smallest solution

- The smallest analogue signal converter in terminal block format on the market
- Space-saving conversion of analogue signals in the control cabinet thanks to the slim, 6 mm wide module width
- Simple wiring with plug-in cross-connectors

General ordering data

Version	2-/3-wire connection technology, Output current loop powered, Tension-clamp connection, Output : 4-20 mA
Order No.	8425720000
Type	MCZ PT100/3 CLP 0...100C
GTIN (EAN)	4032248012664
Qty.	10 pc(s).

MCZ PT100/3 CLP 0...100C

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technical data

Dimensions and weights

Depth	63.2 mm	Depth (inches)	2.488 inch
Width	6 mm	Width (inches)	0.236 inch
Length	91 mm	Length (inches)	3.583 inch
Net weight	28.9 g		

Temperatures

Storage temperature	-25 °C...85 °C	Operating temperature	-25 °C...50 °C
---------------------	----------------	-----------------------	----------------

Probability of failure

MTTF	1,066 Years
------	-------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1	SCIP	c2a21576-d875-4548-ae68-5e7f85ddf0c7
------------	----------------	------	--------------------------------------

Input

Number of inputs	1	Sensor	PT100 (3 wire)
Sensor supply	0.8 mA / 9...30 V DC	Temperature input range	0...100 °C

Output

Load impedance current	≤ 600 Ω	Number of outputs	1
Output current	4...20 mA (current loop) at 9...30V DC		

General data

Accuracy	Typ.: 0.2 %, máx. 0.5 % v. FSR	Configuration	none
Galvanic isolation	Without isolation, between input/output	Linearity	Yes
Rail	TS 35	Step response time	10 ms
Temperature coefficient	max. ± 250 ppm/K	Type of connection	Tension-clamp connection
Voltage supply	Output loop powered, max. 30 V/ min. 9 V + (20 mA x RL)		

Insulation coordination

EMC standards	EN 61000-6	Galvanic isolation	Without isolation, between input/output
Pollution severity	2	Rated voltage	50 V
Surge voltage category	I		

MCZ PT100/3 CLP 0...100C

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

Technical data

info@weidmuller.com

www.weidmuller.com

Connection data

Type of connection	Tension-clamp connection	Clamping range, rated connection	1.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	1.5 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 16
Wire cross-section, solid, min.	0.5 mm ²	Wire cross-section, solid, max.	1.5 mm ²
Wire cross-section, solid, min. (AWG)	AWG 26	Wire cross-section, solid, max. (AWG)	AWG 16
Wire connection cross section, finely stranded, min.	0.5 mm ²	Wire connection cross section, finely stranded, max.	1.5 mm ²
Wire cross-section, finely stranded, min. (AWG)	AWG 26	Wire cross-section, finely stranded, max. (AWG)	AWG 16
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	1.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.5 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	1.5 mm ²

Classifications

ETIM 6.0	EC002919	ETIM 7.0	EC002919
ETIM 8.0	EC002919	ECLASS 9.0	27-21-01-29
ECLASS 9.1	27-21-01-29	ECLASS 10.0	27-21-01-29
ECLASS 11.0	27-21-01-29	ECLASS 12.0	27-21-01-29

MCZ PT100/3 CLP 0...100C

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

Technical data

Tender specification sheets

Long specification

Short specification

www.weidmueller.com

PT100 temperature measuring transformer, output-loop powered, 3-wire connection technology

RTD measuring transformer in 6 mm width, 4...20 mA output-loop powered without electrical isolation, for transmitting PT100 2-/3-wire signals. Input temperature range 0...+100 °C.

Add-on housing for TS35 rail mounting
Dimensions: L/W/H 91/6/ 63.2 mm
Tension-clamp connection / Nominal cross-section 1.5 mm²
Protection degree: IP 20
Input PT100, 2-/3-wire
Output 4...20 mA
Load resistance Transmission error Auxiliary power via 4...20 mA current loop
Ambient temperature range 0°C...+50 °C < 0,2 % v. E.
Isolation no electrical isolation
Approvals cURus, CSA

Type MCZ PT100/3 CLP 0...100C

PT100 temperature measuring transformer, output-loop powered, 3-wire connection technology
RTD measuring transformer in 6 mm width, 4...20 mA output-loop powered without electrical isolation, for transmitting PT100 2-/3-wire signals. Input temperature range 0...+100 °C.

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E141197

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Engineering Data	CAD data – STEP
Engineering Data	EPLAN, WSCAD, Zuken E3.S
User Documentation	Instruction sheet
Catalogues	Catalogues in PDF-format
Brochures	

MCZ PT100/3 CLP 0...100C

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030




32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

Drawings

Connection diagram info@weidmueller.com

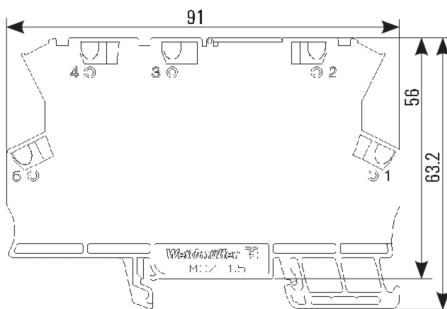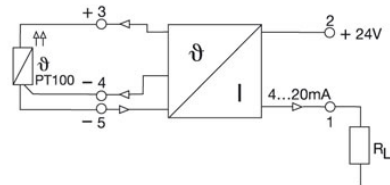

dimensions

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Fixings & Accessories](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[F03-01 SUS304 BINIL](#) [8000-5130](#) [FH-AP1](#) [PH-1-10M](#) [PH-1-20M](#) [PH-2-30M](#) [AC201](#) [R4](#) [ADI-LC3S](#) [E39-L149](#) [EC18-WELL](#) [PBT420-100R](#) [K35-4](#) [A-1923](#) [ACPG-003](#) [SS-12143](#) [STA12](#) [PH-1-50M](#) [R6](#) [D01051301](#) [43912557-020](#) [MF-1 D=3.2](#) [BGN-035](#) [E39-L7](#) [ZX-SB11](#) [D01070602](#) [606072](#) [606075](#) [Y92ES12PVC4A10ML](#) [Y92ES12PVC4S5ML](#) [ZFV-XMF2](#) [E4R-R12A-CS3M010](#) [ZX-SW11E V3](#) [CCS-PL-LDR2-70](#) [E4R-R12A-CS3M020](#) [BS-1T CHITAN](#) [T63353](#) [F03-01 CHITAN](#) [PH-2-90M](#) [PH-2-5M](#) [XMLZL008](#) [AC244](#) [PH-1-40M](#) [PH-2-60M](#) [ZG2-XC15CR](#) [ZS-SW11V3E](#) [ZS-MDC11](#) [ZS-DSU11](#) [ZJ-SFW11](#) [Y92E-ST505-05](#)