

SAIB-4/7**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Individual cable lengths are often required nowadays. In order to meet these demands, Weidmüller offers a wide range of plug-in connectors for custom assembly.

Male plugs and female socket for customisable assembly for M8, M12, M16 and 7/8" connections which are highly robust and ideally suited to machine engineering, for instance. The M12 plug-in connectors offer a choice of 5 different connection systems.

The screw connection can be used in a wide range of applications. With this technology the conductor, optionally with wire-end ferrules, can be plugged into connection elements and secured with a screw. It is the classic, cheapest form of connection technology that also supports multi-conductor connections.

General ordering data

Version	Field attachable connector, M12, Female socket, straight
Order No.	9457240000
Type	SAIB-4/7
GTIN (EAN)	4008 1903 12275
Qty.	1 pc(s).

Creation date September 18, 2022 5:00:54 AM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

SAIB-4/7

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight 25 g

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1, Imidazolidine-2-thione 96-45-7	SCIP	bcee35cf- c0f5-43d2-8daf-65ab0d08641a
------------	--	------	--

Technical data customisable plug-in connectors

Cable diameter	4...6 mm (PG7)/ 6...8 mm (PG9)	Cable diameter, max.	6 mm
Cable diameter, min.	4 mm	Coding	A
Conductor cross-section, max.	0.75 mm ²	Conductor cross-section, min.	0.14 mm ²
Connection cross-section, max.	0.75 mm ²	Connection cross-section, min.	0.14 mm ²
Contact surface	CuSnZn	Housing main material	PA
Insulation strength	10 ⁸ Ω	Number of poles	4
Plugging cycles	≥ 50	Pollution severity	3
Protection degree	IP67	Rated current	4 A
Rated voltage	250 V	Rated voltage	250 V (4-pole) / 60 V (5-pole)
Shield connection	No	Temperature range of housing	-40 ... +85 °C
Threaded ring material	Diecast zinc	Type of connection	Screw connection

General Info

Connection 1	M12	Connection 2	Screw
Description of article	SAIS / SAIB	Housing main material	PA
Connection thread	M12	Contact surface	CuSnZn
Protection degree	IP67	Plugging cycles	≥ 50

Standards

Connector standard IEC 61076-2-101

Classifications

ETIM 6.0	EC002635	ETIM 7.0	EC002635
ETIM 8.0	EC002635	ECLASS 9.0	27-44-01-02
ECLASS 9.1	27-44-01-03	ECLASS 10.0	27-44-01-02
ECLASS 11.0	27-44-01-02	ECLASS 12.0	27-44-01-16

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E307231

Creation date September 18, 2022 5:00:54 AM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

2

SAIB-4/7

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data**Downloads**

Engineering Data	CAD data – STEP
Engineering Data	EPLAN, WSCAD, Zuken E3.S
User Documentation	Manual
Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN FL FIELDWIRING EN


SAIB-4/7

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Pole scheme

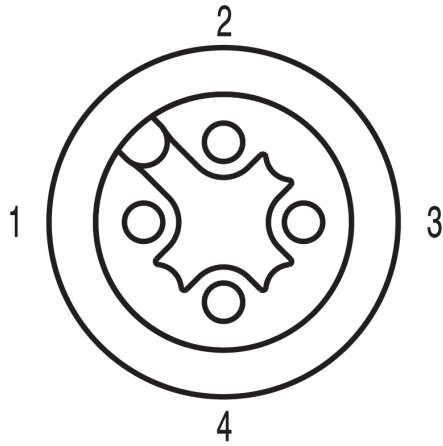

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [MA1EAF1200](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R4A00A18M020](#) [8R5000A16M005](#) [1200910008](#) [1200910011](#)
[1300140094](#) [130203-0054](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [8R4006A16M010](#) [8R5006A18A120](#) [1604232](#)
[1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-01016](#) [41-40011](#) [41-40017](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-](#)
[00002](#) [43-01166](#) [41-40005](#) [41-40016](#) [43-00161](#) [43-01191](#) [XS3P-M421-2](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R4006A16A120](#)
[8R4000A16M010](#) [RKC 50/16](#) [1R3004A20A1201](#) [6-22279-3](#) [N03FA03144](#) [1300140077](#) [XS8A-0441](#) [859RD04-103R004](#) [860RD04-113R004](#)
[860RD04-213R004](#) [860-X08-213R004](#) [1-213245-2](#) [2273142-2](#)