


CLI C 1-9 GE/SW 700-719 2-PAG RL

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

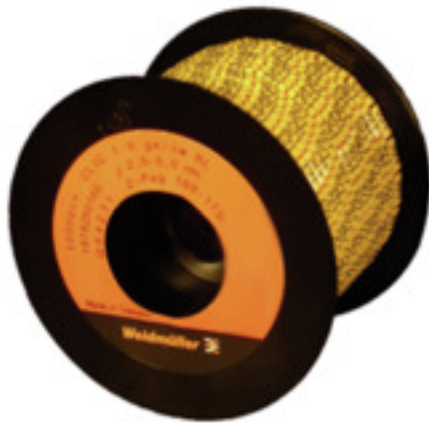

Similar to illustration

CLI C conductor markers are mounted on unconnected conductors. Four different sizes are available for labelling conductor cross-sections from 0.5 mm² to max. 70 mm². The markers are already printed and ready for use. Individual labelling is possible by combining the individual markers.

- Closed markers, reliable and for mounting on unconnected cables
- A special flexible bellow profile ensures a wide application range
- Fast and easy to fit – with minimal effort
- Corresponding accessories make labelling easy
- Permanent, high-quality labelling
- High contrast for optimum legibility

General ordering data

| | |
|------------|--|
| Version | CableLine, Conductor and cable markers, 2.5 - 5 mm, 9 x 4.2 mm, yellow |
| Order No. | 1878260700 |
| Type | CLI C 1-9 GE/SW 700-719 2-PAG RL |
| GTIN (EAN) | 4032248470129 |
| Qty. | 1,000 pc(s). |

Creation date January 25, 2021 1:42:39 PM CET

Catalogue status 15.01.2021 / We reserve the right to make technical changes.

CLI C 1-9 GE/SW 700-719 2-PAG RL

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|----------------|------------|-----------------|------------|
| Depth | 5 mm | Depth (inches) | 0.197 inch |
| Height | 9 mm | Height (inches) | 0.354 inch |
| Net weight | 0.157 g | Width | 4.2 mm |
| Width (inches) | 0.165 inch | | |

Temperatures

| | |
|-----------------------------|-------------|
| Operating temperature range | -30...80 °C |
|-----------------------------|-------------|

General data

| | | | |
|-----------------------------------|--|--|--------------------|
| Colour | yellow | Colour of printing | black |
| Halogen | Yes | Insulation cross-section, max. | 5 mm |
| Material | PVC, soft, without Cadmium | Material colour according to resistance code | 4 |
| Number of markers per combination | 1 Component part = Conductor and cable markers | Operating temperature range | -30...80 °C |
| Operating temperature range, max. | 80 °C | Operating temperature range, min. | -30 °C |
| Orientation of print | horizontal | Printed characters | Numbers |
| Printing method | hot-embossing | Recommended industries | Process, Machinery |
| Type of printing | Standard | UL 94 flammability rating | V-0 |
| Width | 4.2 mm | | |

Conductor and cable markers

| | | | |
|-------------------------------|---------------------|----------------------------------|-------------------------|
| Conductor O.D. | 2.5 - 5 mm | Conductor O.D., max. | 5 mm |
| Conductor O.D., min. | 2.5 mm | Conductor cross-section, max. | 4 mm ² |
| Conductor cross-section, min. | 1.5 mm ² | Cross-section for connected wire | 1.5 - 4 mm ² |
| Halogen | Yes | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC001530 | ETIM 7.0 | EC001530 |
| ECLASS 9.0 | 27-40-04-01 | ECLASS 9.1 | 27-40-04-01 |
| ECLASS 10.0 | 27-40-04-01 | ECLASS 11.0 | 27-28-11-02 |

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Downloads

| | |
|-----------------------------|--|
| Engineering Data | EPLAN_WSCAD |
| Product Change Notification | PCN_CableLine_DE PCN_CableLine_EN |

Data sheet

CLI C 1-9 GE/SW 700-719 2-PAG RL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings



Similar to illustration

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wire Labels & Markers](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[89078GBEST](#) [89082GBESR](#) [89082GBEST](#) [PCL025-4](#) [5761-2SF](#) [58400](#) [586R734H02](#) [M1.040.0000.6](#) [CRS-CM5M](#) [CRS-M18M](#) [CS1836-000](#) [CS8626-000](#) [CU6337-000](#) [CU6342-000](#) [CU6343-000](#) [CWD01-0](#) [CWD012-0](#) [CWD012-7](#) [CWD015-3](#) [CWD015-7](#) [CWD02-0](#) [CWD02-3](#) [CWD02-4](#) [CWD02-6](#) [CWD02-8](#) [CWD02-A](#) [CWD02-D](#) [CWD02-H](#) [CWD02-K](#) [CWD02-L](#) [CWD02-M](#) [CWD02-P](#) [CWD02-Q](#) [CWD02-R](#) [CWD02-U](#) [CWD02-W](#) [CWD02-Y](#) [CWD03-+](#) [CWD03-0](#) [CWD03-P](#) [CWD06-0](#) [CWD06-8](#) [CWD06-9](#) [CWD06-L](#) [CWD06-N](#) [CWD09-0](#) [CWD09-5](#) [CWD09-7](#) [6806810001](#) [CZ2857-000](#)