

**FF-SL 65 55/230V GY****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



The filter fans combine a safe and profitable cabinet cooling due to their low energy consumption by maximum air flow. The fluted filter mat of the IP 55 version extends the service life by up to 300% in comparison to conventional filter mats.

**General ordering data**

Type	FF-SL 65 55/230V GY
Order No.	<a href="#">2557000000</a>
Version	Filter fan, IP55, grey
GTIN (EAN)	4050118567632
Qty.	1 pc(s).

Creation date November 12, 2020 4:26:09 PM CET

Catalogue status 06.11.2020 / We reserve the right to make technical changes.

## FF-SL 65 55/230V GY

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

## Technical data

## Dimensions and weights

Width	320 mm	Width (inches)	12.598 inch
Height	320 mm	Height (inches)	12.598 inch
Depth	131 mm	Depth (inches)	5.157 inch
Net weight	3,300 g		

## General data

Colour	grey		
Current consumption	Mains frequency	50 Hz	
	Current	0.29 A	
	Mains frequency	60 Hz	
	Current	0.35 A	
EMC version	No		
Filter class	G 4		
Fuse	6 A		
Height of installation cut-outs	291 mm		
MTBF	40,000 h		
Mounting depth	124 mm		
Mounting height	7 mm		
Noise emission	54 dB (A)		
Operating temperature range	-40...55 °C		
Power	Mains frequency	50 Hz	
	nominal	64 W	
	Mains frequency	60 Hz	
	nominal	80 W	
Protection class (UL)	Type 12		
Rated voltage (text)	230 V AC $\pm$ 10%		
Size	6		
Type of connection	Terminal strip		
Type of mounting	Snap-on		
UL 94 flammability rating	V-0		
UV-resistant	Yes		
Volume flow with exhaust filter	Mains frequency	50 Hz	
	Volume flow	345 m <sup>3</sup> /h	
	Exhaust filter	IP55	
	Mains frequency	60 Hz	
	Volume flow	423 m <sup>3</sup> /h	
Volume flow, free-blowing	Mains frequency	50 Hz	
	Volume flow	500 m <sup>3</sup> /h	
	Mains frequency	60 Hz	
	Volume flow	550 m <sup>3</sup> /h	
	Width of installation cut-outs	291 mm	
With filter	Yes		

## Classifications

ETIM 6.0	EC000320	ETIM 7.0	EC000320
eClass 9.1	27-18-07-16	eClass 10.0	27-18-07-16

**Data sheet****FF-SL 65 55/230V GY****Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com**Technical data****Approvals**

Approvals



ROHS

Conform

**Downloads**Approval/Certificate/Document of  
Conformity[EU Declaration of Conformity](#)

Engineering Data

[STEP](#)

User Documentation


[Installation- and operating instructions](#)

**FF-SL 65 55/230V GY**


**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

**Graph**

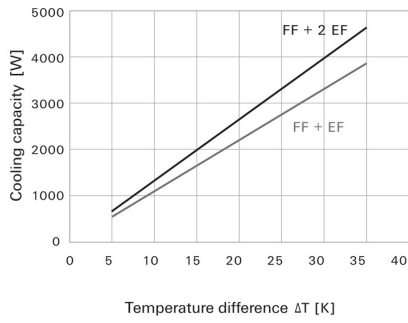

**Graph**

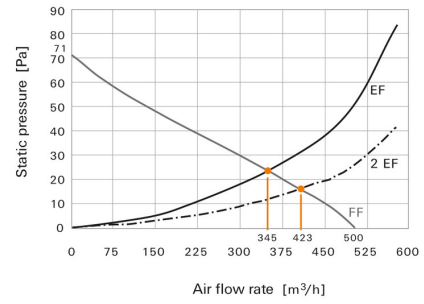

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [AC Fans](#) category:*

*Click to view products by [Weidmuller](#) manufacturer:*

Other Similar products are found below :

[8850A](#) [A2D200-AA04-41](#) [A2E165-AA17-01](#) [AC430019H-012](#) [144LS-2282-010](#) [1500-FAN-01](#) [25.350.5253.0](#) [S2E250-AL06-70](#) [A2D210-AB10-05](#) [A2D240-AA02-02](#) [23241-3](#) [25.345.5353.0](#) [281DY-1LP14-000B](#) [344DY-1LP11-000](#) [39.703.0253.0](#) [USTF1203224VHW](#)  
[3915100996-SA3](#) [3G2C7MC224](#) [W2D200-HH04-07](#) [W2S130-AA03-43](#) [S2E250-BB13-22](#) [8856N](#) [A2E170-AF23-11](#) [W4S250-CA20-56](#)  
[W2S130-AB03-09](#) [5900](#) [C45-A7](#) [TAC12025230MT](#) [8550A](#) [8560N](#) [AD0405HB-G73\(9T\)](#) [CENT-2000-FFTM](#) [CENT-2000-RFTM](#) [W2D200-CA04-52](#) [W2S130-AB25-10](#) [A4E330-AB18-09](#) [W2E250-DB05-52](#) [W4E315-CS22-70](#) [W2E300-CP02-75](#) [S4S250-BA02-20](#) [S2D300-BP02-37](#) [W2S130-AB25-24](#) [W2D250-GA08-08](#) [A2E200-AH38-70](#) [TAC8025115HW](#) [F1238H24BT-FHR](#) [S2D300-CP02-34](#) [4118N/2H8PU-011](#)  
[RLF100-1114-060](#) [AD3512MB-G5B](#)