

# WL2852K

## High Input Voltage, Low Quiescent Current LDO

[Http://www.sh-willsemi.com](http://www.sh-willsemi.com)

### Descriptions


The WL2852K series is a high accuracy, high input voltage low quiescent current, high speed, and low dropout Linear regulator with high ripple rejection. The device is manufactured with Bi-CMOS process.

The WL2852K offers over-current limit and over temperature protection to ensure the device working in well conditions.


The WL2852K regulators are available in standard SOT-89-3L packages. Standard products are Pb-free and Halogen-free.

### Features


- Supply Voltage : 4.75V~40V
- Output Range : 1.8V~5.7V
- Output Accuracy : <+/-2%
- Output Current : 100mA (Up to 150mA Typ.)
- PSRR : 60dB @ 100Hz
- Dropout Voltage : 800mV @ I<sub>OUT</sub>=100mA
- Quiescent Current : 10μA@V<sub>IN</sub>=7V(Typ.)
- Recommend Capacitor : 10uF  
( Locate Cin as close to the Vin pin as possible. )



**SOT-89**



**Pin Configuration (Top View)**

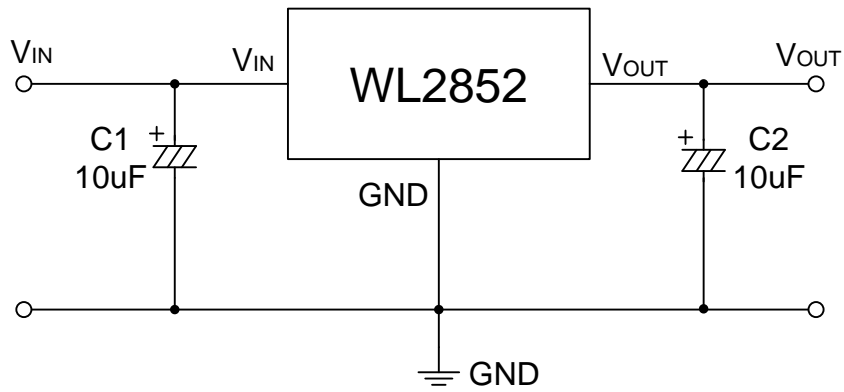


For detail marking information, please see page 10.

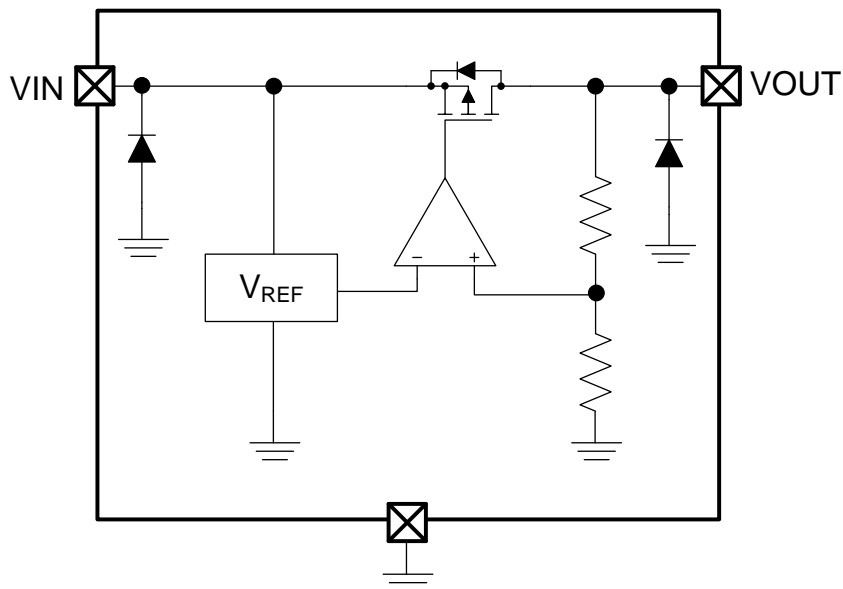
**Marking**

### Order Information

For detail order information, please see page 10.

**Typical Application**

**Pin Description**

PIN	Symbol	Description
1	VOUT	Voltage Output
2	GND	Ground
3	VIN	Voltage Input

**Block Diagram**


**Absolute Maximum Ratings**

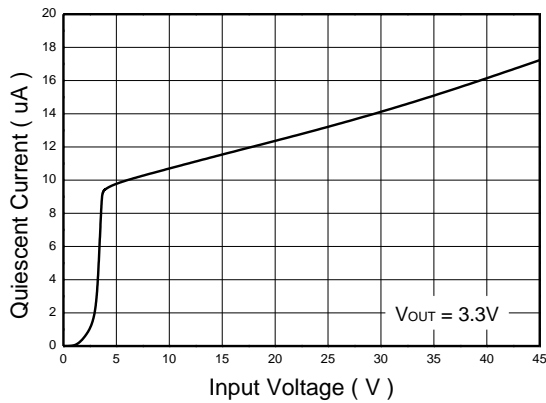
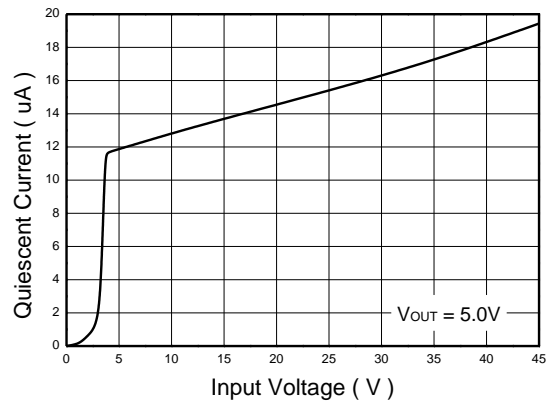
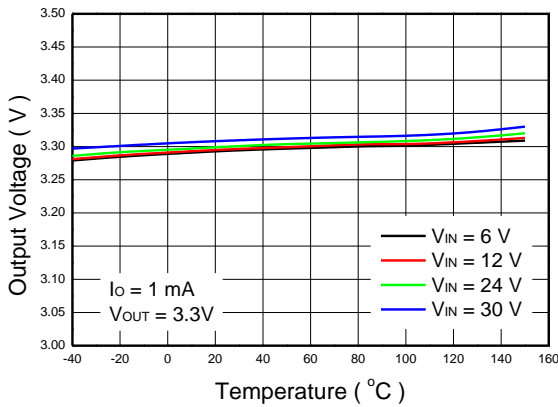
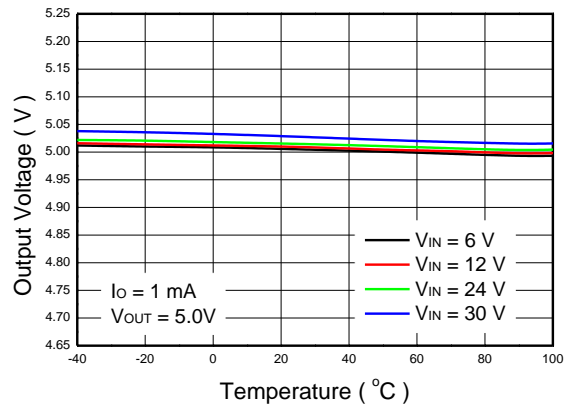
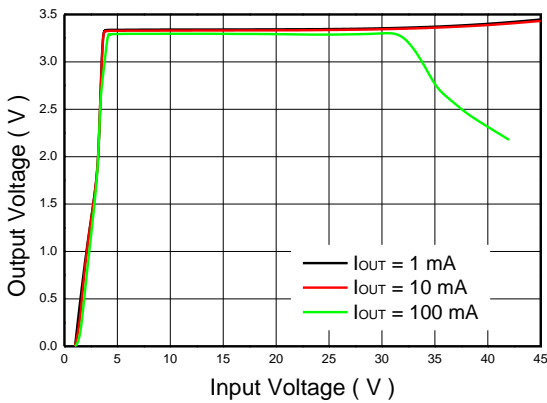
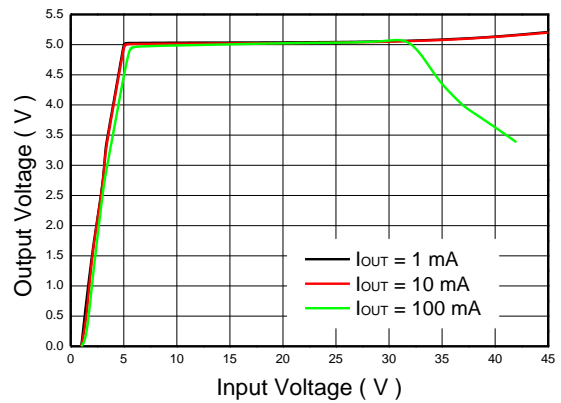
Parameter	Value	Unit
Power Dissipation	Internal limited	mW
V <sub>IN</sub> Range	-0.3~45	V
V <sub>OUT</sub> Range	-0.3~6.5	V
Lead Temperature Range	260	°C
Storage Temperature Range	-55 ~ 150	°C
Operating Junction Temperature Range	150	°C
ESD MM	400	V
ESD HBM	4K	V

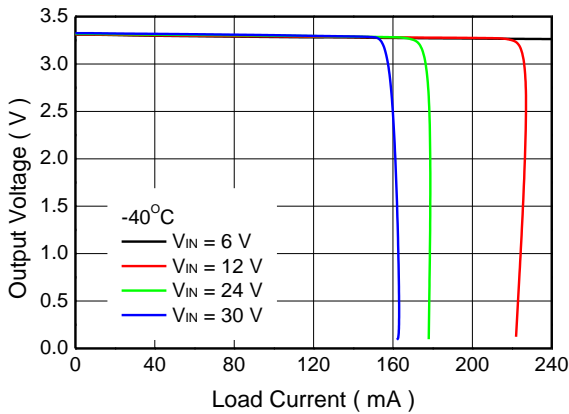
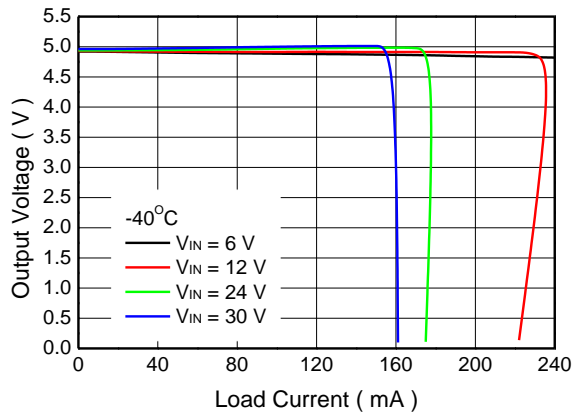
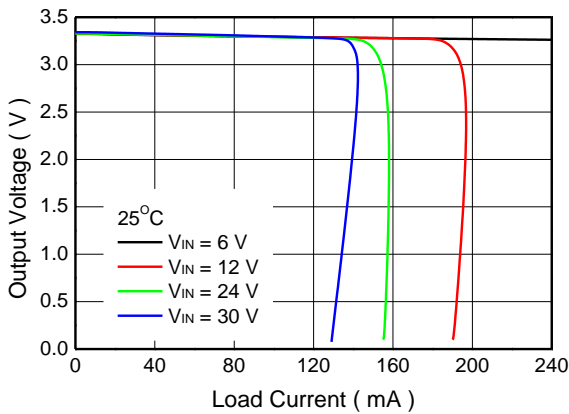
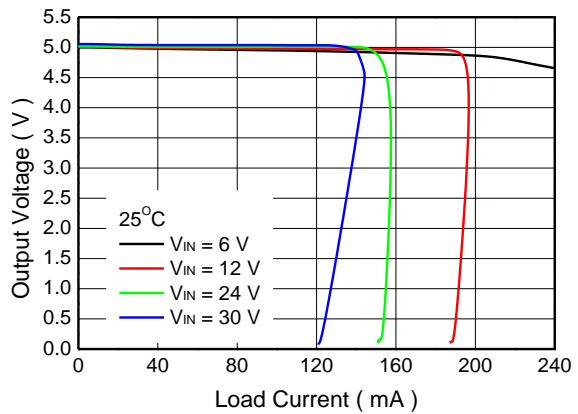
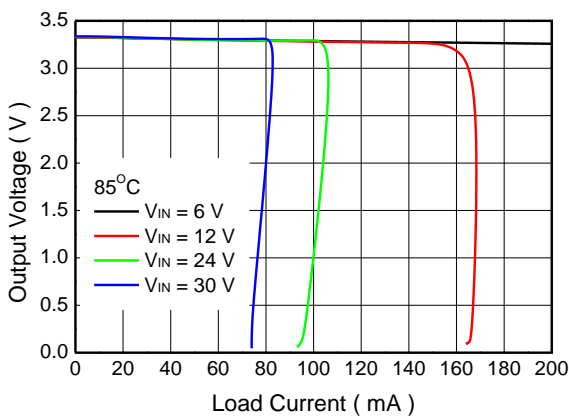
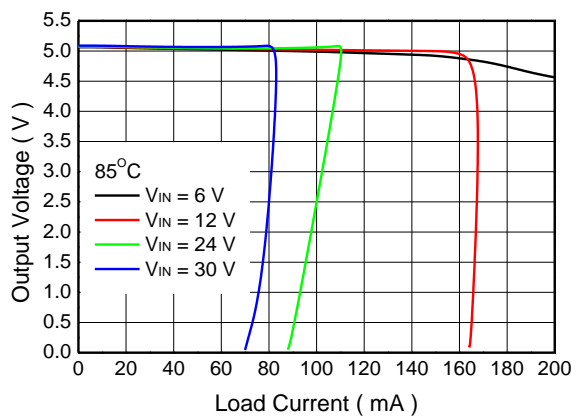
**Recommend Operating Ratings**

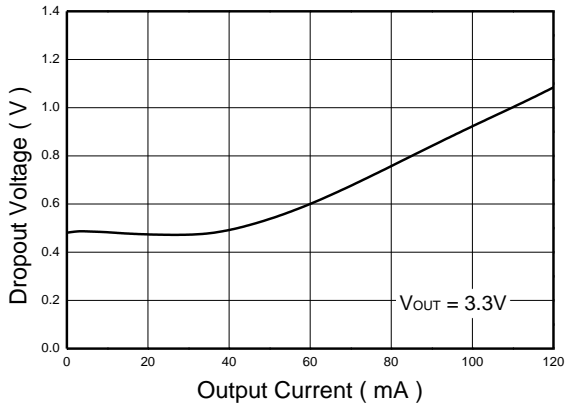
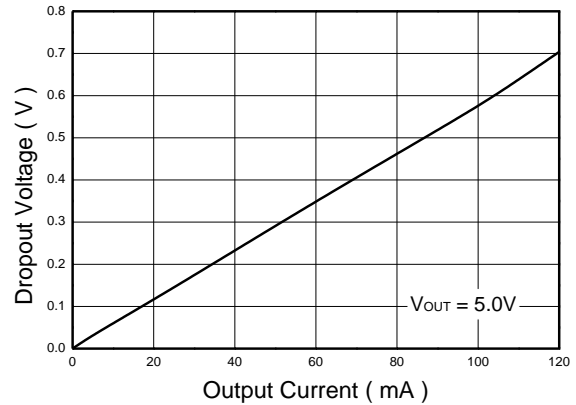
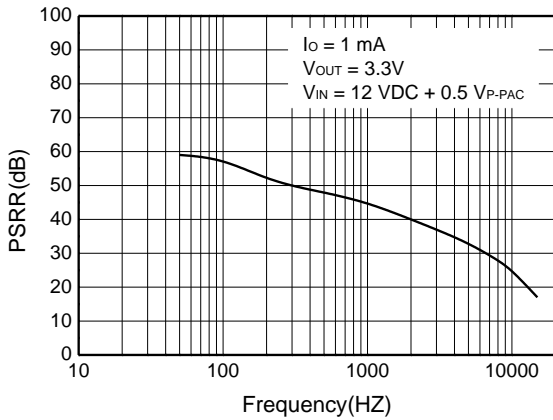
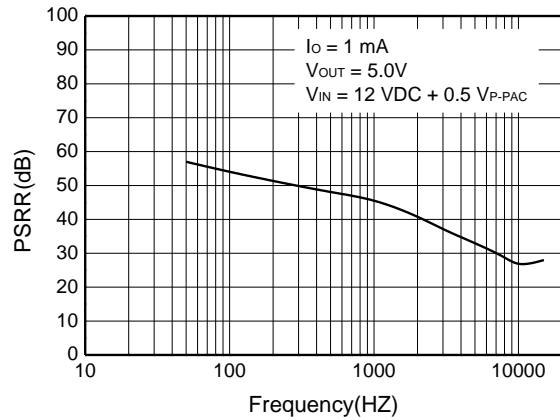
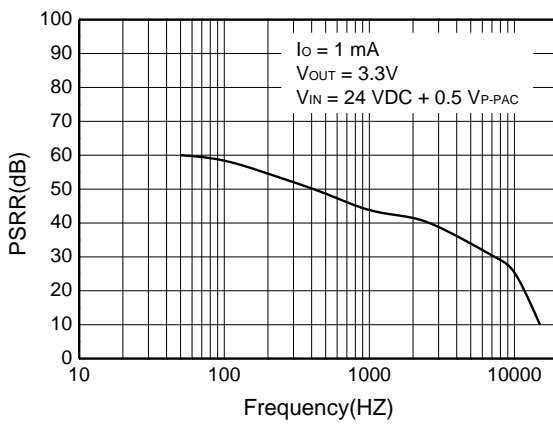
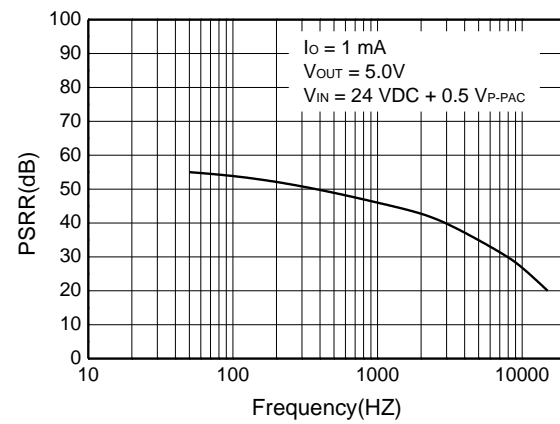
Parameter	Value	Unit
Operating Supply voltage	4.75~40	V
Operating Temperature Range	-40~85	°C
Thermal Resistance (On PCB) , R <sub>θJA</sub>	43.5	°C/W
Power Dissipation	1000	mW

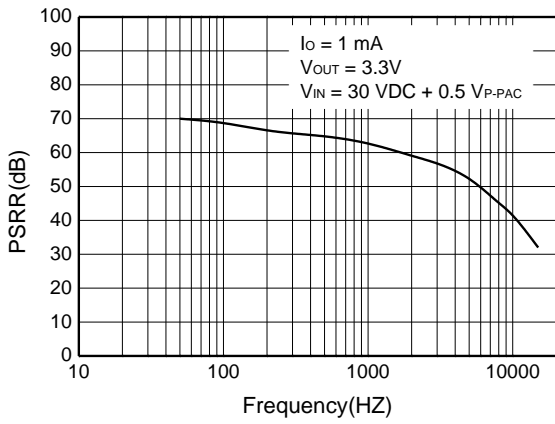
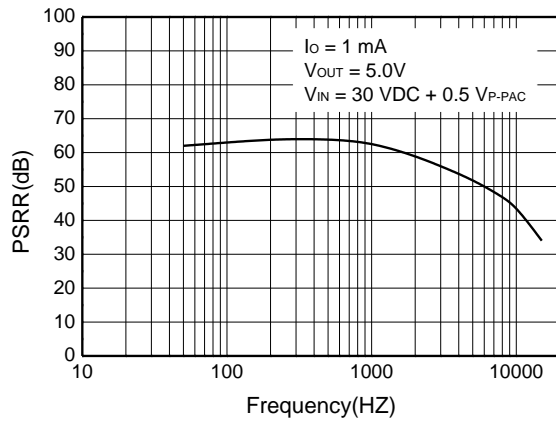
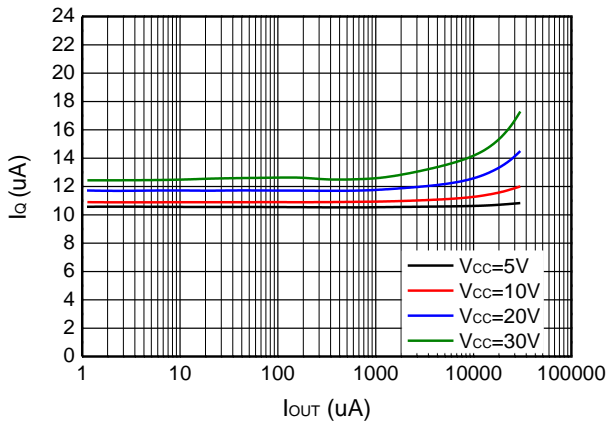
**Electronics Characteristics (Ta=25°C, V<sub>IN</sub>=12V, C<sub>IN</sub>=C<sub>OUT</sub>=10uF, unless otherwise noted)**

Symbol	Parameter	Test Condition	WL2852K SPEC			Unit
			Min.	Typ.	Max.	
V <sub>IN</sub>	Input Range	I <sub>OUT</sub> =10mA	4.75		40	V
V <sub>OUT</sub>	Output Range	I <sub>OUT</sub> =10mA	V <sub>OUT</sub> *0.98	V <sub>OUT</sub>	V <sub>OUT</sub> *1.02	V
ΔV <sub>OUT</sub>	Output Voltage	V <sub>IN</sub> =12V, I <sub>OUT</sub> =10mA	5.586	5.7	5.814	V
			5.194	5.3	5.406	V
			4.9	5.0	5.1	V
			4.312	4.4	4.488	V
			3.920	4.0	4.080	V
			3.528	3.6	3.672	V
			3.234	3.3	3.366	V
I <sub>OUT_PK</sub>	Maximum Output Current	V <sub>IN</sub> =12V, R <sub>L</sub> =1Ω	180	280	460	mA
I <sub>Q</sub>	Quiescent Current	V <sub>IN</sub> =7V, No load		10	15	μA
		V <sub>IN</sub> =24V, No load		11	16	
		V <sub>IN</sub> =40V, No load		13	20	
V <sub>DROP</sub>	Dropout Voltage	I <sub>OUT</sub> =1mA		8	12	mV
		I <sub>OUT</sub> =100mA		800	1200	
Δ V <sub>Line</sub>	Line Regulation	V <sub>IN</sub> =7--24V, V <sub>OUT</sub> =5V I <sub>OUT</sub> =1mA		0.02		%V
		V <sub>IN</sub> =7--45V, V <sub>OUT</sub> =5V I <sub>OUT</sub> =1mA		0.1		
Δ V <sub>Load</sub>	Load Regulation	V <sub>IN</sub> =12V, I <sub>OUT</sub> =1--100mA		0.6		%
e <sub>NO</sub>	Output Noise	I <sub>OUT</sub> =10mA	-100		+100	μV
PSRR	Ripple Rejection	V <sub>IN</sub> =10V	f=100Hz	60		dB
		V <sub>PP</sub> =0.5V	f=1KHz	45		
		I <sub>OUT</sub> =1mA	f=10KHz	35		
T <sub>SD</sub>	Thermal Protection	V <sub>IN</sub> =12V, I <sub>OUT</sub> =1mA		165		°C
T <sub>SD_HYS</sub>	Thermal Protection Hys	V <sub>IN</sub> =12V, I <sub>OUT</sub> =1mA		30		°C
ΔVo/ΔT	Temperature Coefficient	V <sub>IN</sub> =12V, I <sub>OUT</sub> =1mA		±0.5		mv/°C

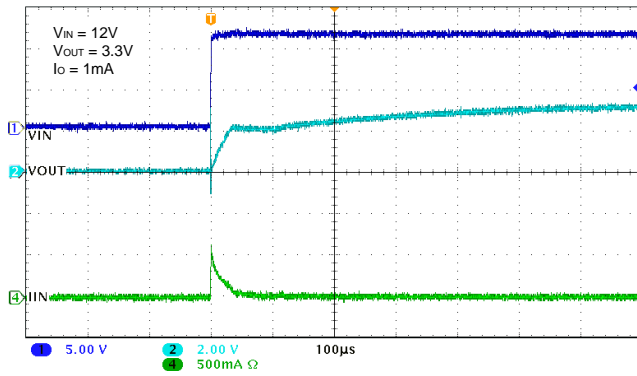
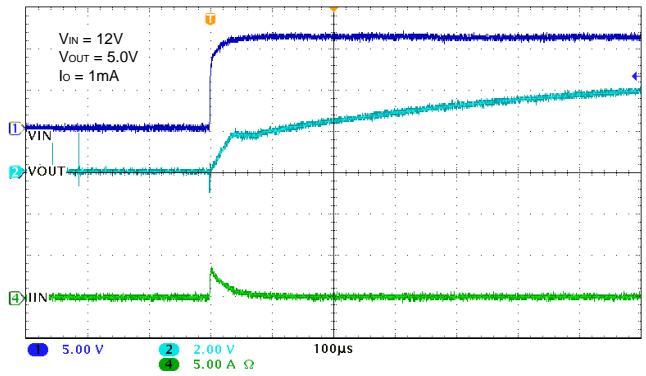
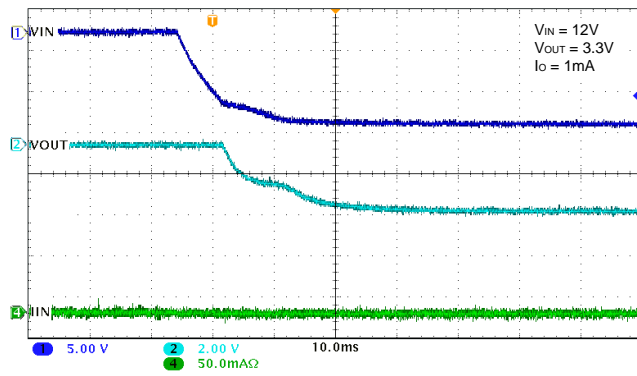
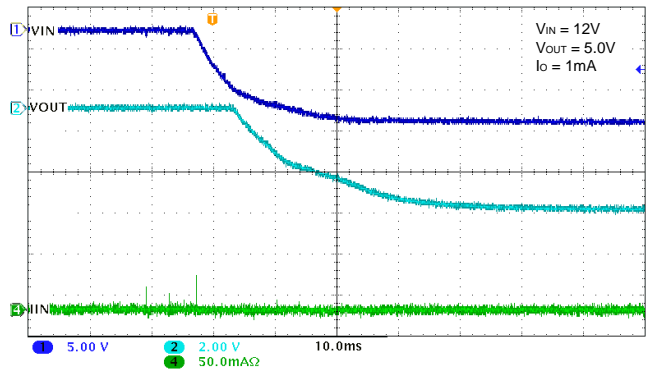
**Typical characteristics (Ta=25oC, CIN=COUT=10uF, unless otherwise noted)**

**Quiescent Current vs. Input Voltage**

**Quiescent Current vs. Input Voltage**

**Output Voltage vs. Temperature**

**Output Voltage vs. Temperature**

**Output Voltage vs. Input Voltage**

**Output Voltage vs. Input Voltage**


**Output Voltage vs. Load Current**

**Output Voltage vs. Load Current**

**Output Voltage vs. Load Current**

**Output Voltage vs. Load Current**

**Output Voltage vs. Load Current**

**Output Voltage vs. Load Current**


**Dropout Voltage vs. Output Current**

**Dropout Voltage vs. Output Current**

**PSRR vs. Frequency**

**PSRR vs. Frequency**

**PSRR vs. Frequency**

**PSRR vs. Frequency**


**PSRR vs. Frequency**

**PSRR vs. Frequency**

**Quiescent Current vs. Output Current**




**Startup from Power ON**

**Startup from Power ON**

**Shutdown from Power OFF**

**Shutdown from Power OFF**

**ORDER INFORMATION**

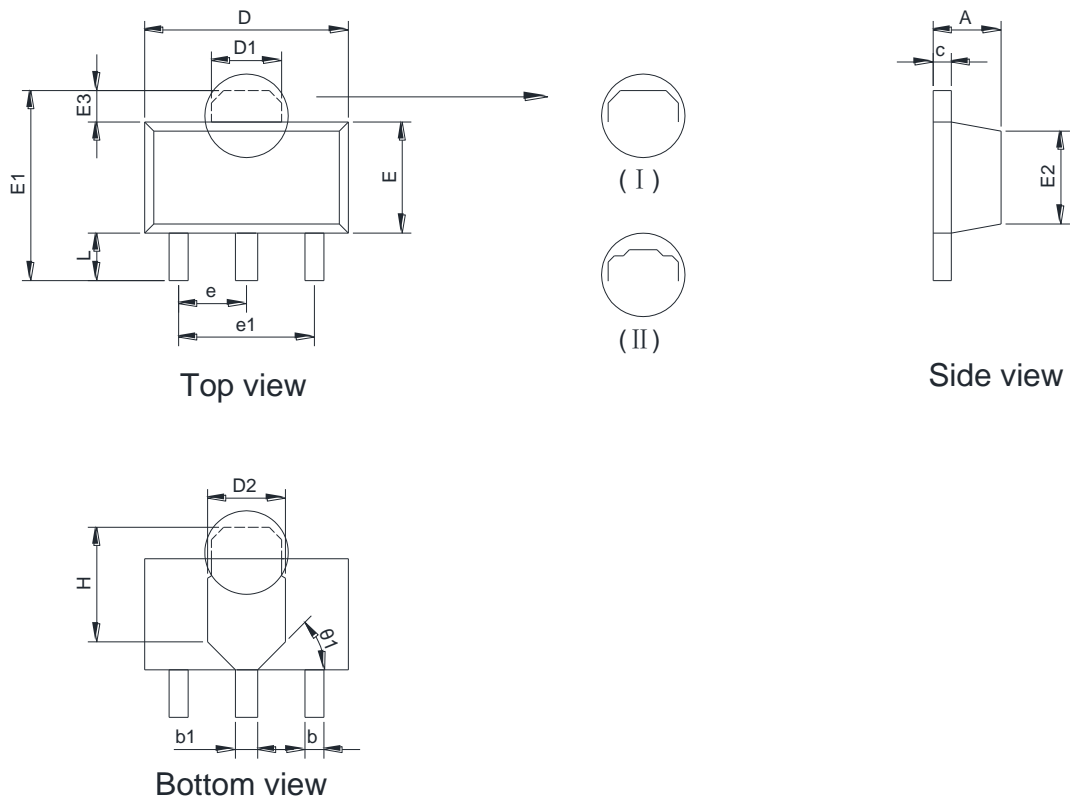
Ordering No.	Vout (V)	Package	Operating Temperature	Marking	Shipping
WL2852K33-3/TR	3.3	SOT-89	-40~+85°C	2852KDD YYWW	Tape and Reel, 1000
WL2852K36-3/TR	3.6	SOT-89	-40~+85°C	2852KDG YYWW	Tape and Reel, 1000
WL2852K40-3/TR	4.0	SOT-89	-40~+85°C	2852KEA YYWW	Tape and Reel, 1000
WL2852K44-3/TR	4.4	SOT-89	-40~+85°C	2852KEE YYWW	Tape and Reel, 1000
WL2852K50-3/TR	5.0	SOT-89	-40~+85°C	2852KFA YYWW	Tape and Reel, 1000
WL2852K53-3/TR	5.3	SOT-89	-40~+85°C	2852KFD YYWW	Tape and Reel, 1000
WL2852K57-3/TR	5.7	SOT-89	-40~+85°C	2852KFH YYWW	Tape and Reel, 1000

**Marking:**

2852K\*\* = Device Code

YY = Year

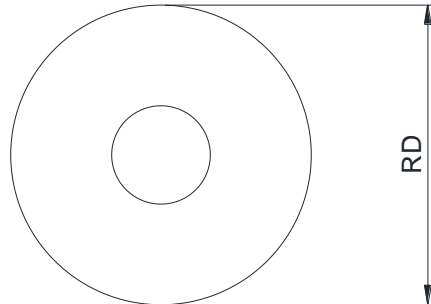
WW = Week

**Package outline dimensions**
**SOT-89-3L**


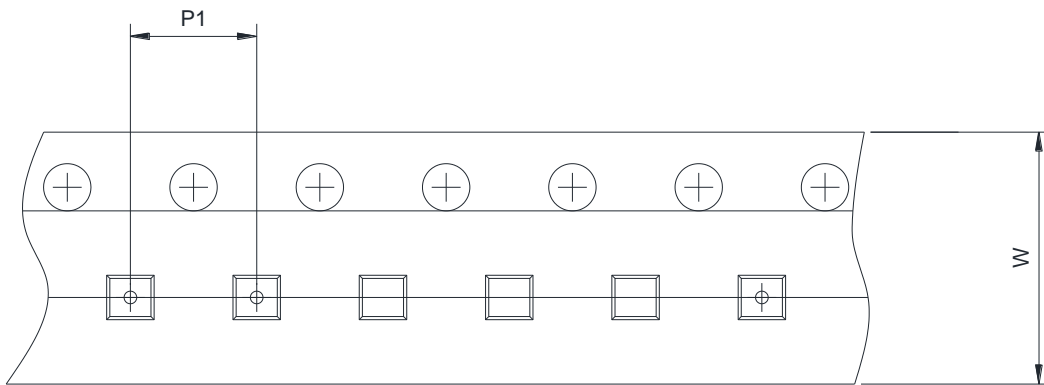
Symbol	Dimensions in millimeters	
	Min.	Max.
A	1.400	1.600
b	0.320	0.520
b 1	0.400	0.580
c	0.350	0.440
D	4.400	4.600
D1	1.550	1.800
D2	1.600	1.900
E	2.300	2.600
E1	3.940	4.250
E2	1.940	2.290
E3	0.600	0.800
H	2.700	3.000
e	1.500TYP	
e 1	3.000TYP	
L	0.890	1.200
θ 1	45°	

**TAPE AND REEL INFORMATION**

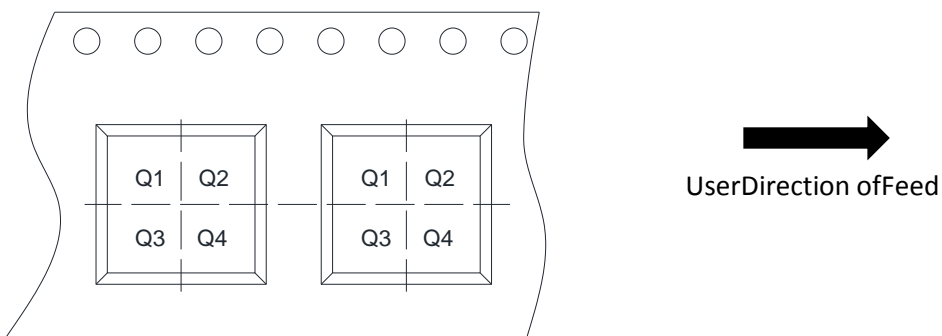
Reel Dimensions



Tape Dimensions



Quadrant Assignments For PIN1 Orientation In Tape



RD	Reel Dimension	■ 7 inch    □ 13 inch
P1	Pitch between successive cavity centers	□ 2 mm    □ 4 mm    ■ 8 mm
W	Overall width of the carrier tape	□ 8 mm    ■ 12 mm
Pin1	Pin1 Quadrant	□ Q1    □ Q2    □ Q3    □ Q4

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LDO Voltage Regulators](#) category:*

*Click to view products by [Will Semiconductor](#) manufacturer:*

Other Similar products are found below :

[M38D29FFHP#U1](#) [702103A](#) [717726C](#) [742457H](#) [MP20051DN-LF-Z](#) [R5F111PGGFB#30](#) [AP7363-SP-13](#) [NCP103AMX285TCG](#)  
[NCV8664CST33T3G](#) [NCV8752AMX28TCG](#) [L9454](#) [AP7362-HA-7](#) [LX13043CLD](#) [TCR3DF185,LM\(CT](#) [TCR3DF24,LM\(CT](#)  
[TCR3DF285,LM\(CT](#) [TCR3DF31,LM\(CT](#) [TCR3DF45,LM\(CT](#) [TLF4949EJ](#) [L9708](#) [L970813TR](#) [030014BB](#) [059985X](#) [EAN61387601](#)  
[EAN61573601](#) [NCP121AMX173TCG](#) [NCP4687DH15T1G](#) [NCV8703MX30TCG](#) [701326R](#) [702087BB](#) [755078E](#) [TCR2EN28,LF\(S](#)  
[LM1117DT-1.8/NO](#) [LT1086CM#TRPBF](#) [AZ1085S2-1.5TRE1](#) [MAX15101EWL+T](#) [NCV8170AXV250T2G](#) [SCD337BTG](#)  
[TCR3DF27,LM\(CT](#) [TCR3DF19,LM\(CT](#) [TCR3DF125,LM\(CT](#) [TCR2EN18,LF\(S](#) [MAX15103EWL+T](#) [TS2937CZ-5.0 C0](#) [MAX8878EUK30-](#)  
[T](#) [MAX663CPA](#) [NCV4269CPD50R2G](#) [NCV8716MT30TBG](#) [AZ1117IH-1.2TRG1](#) [MP2013GQ-P](#)