

WS3202E


Over voltage and over current protection IC

[Http://www.sh-willsemi.com](http://www.sh-willsemi.com)


Descriptions

The WS3202E is an Over-Voltage-Protection (OVP) and Over-Current-Protection (OCP) device. The device will switch off internal MOSFET to disconnect IN to OUT to protect load when any of input voltage, input current over the threshold. The Over temperature protection (OTP) function monitors chip temperature to protect the device.


The WS3202E is available in SOT-23-6L package. Standard products are Pb-free and Halogen-free.



SOT-23-6L



Pin configuration (Top view)



WS61 = Device code

T = Series code

Y = Year

WW = Week

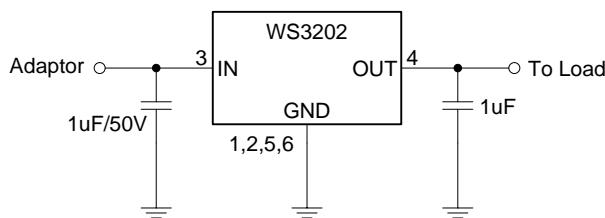
Marking

Applications

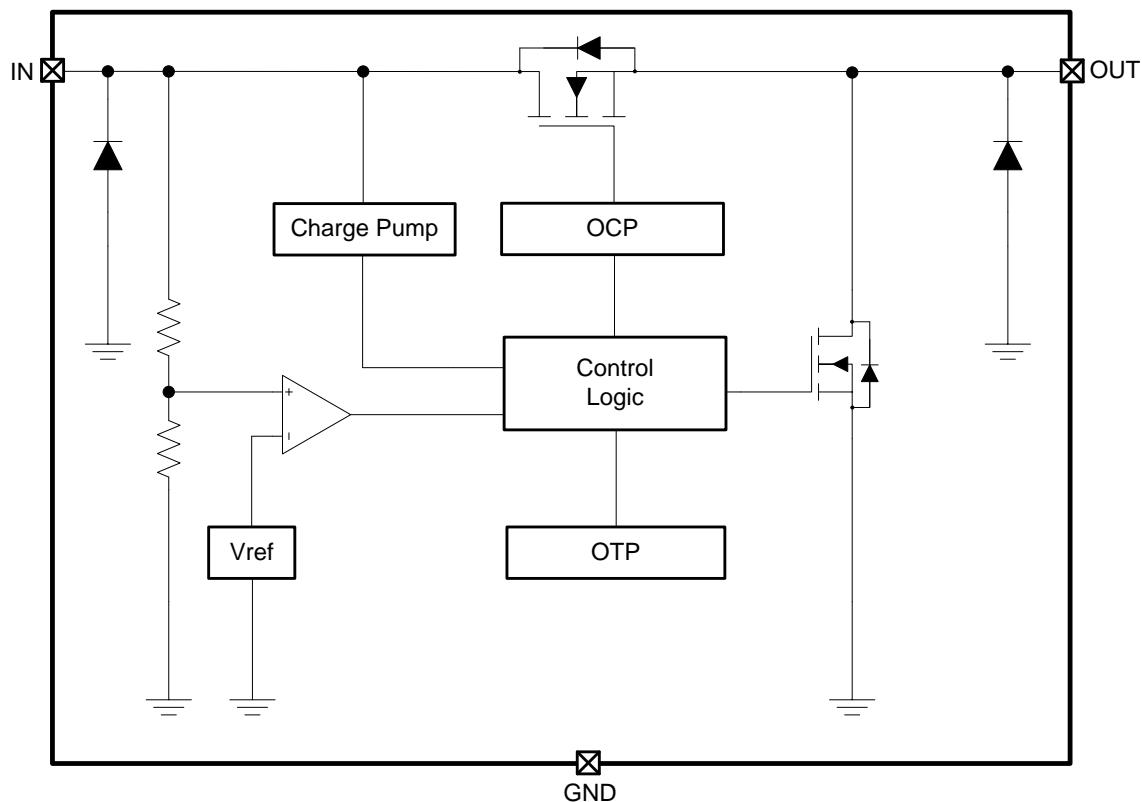
- GPS
- PMP
- MID
- PAD
- Digital cameras
- Digital Videos

Order information

Device	Package	Shipping
WS3202E61-6/TR	SOT-23-6L	3000/Reel&Tape

Typical applications**Pin descriptions**

Pin No.	Symbol	Descriptions
1, 2, 5, 6	GND	Power ground
3	IN	Input pin, connect to AC adaptor or VBUS. A 1uF low ESR ceramic capacitor or larger must be connected as close as to this pin. It is recommended to use 50V capacitor or according to application.
3	OUT	Output pin, Connect to load.

Block diagram

Absolute maximum ratings

Parameter	Symbol	Value	Unit
Input voltage (IN pin)	V _{IN}	-0.3 ~ 25	V
Output voltage (OUT pin)	V _{OUT}	-0.3 ~ 6.5	V
Power dissipation ^{*1 *3}	P _D	0.5	W
Power dissipation ^{*2 *3}		0.3	W
Thermal resistance ^{*1}	R _{θJA}	250	°C/W
Thermal resistance ^{*2}		416	°C/W
Junction temperature	T _J	150	°C
Lead temperature(10s)	T _L	260	°C
Storage temperature	T _{STG}	-55 ~ 150	°C
ESD Ratings	HBM	±8000	V
	MM	±1000	V

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

***1:** Surface mounted on FR-4 Board using 1 square inch pad size, dual side, 1oz copper

***2:** Surface mounted on FR-4 board using minimum pad size, 1oz copper

***3:** Power dissipation is calculated by P_D = (V_{IN}-V_{OUT}) x I_{OUT}

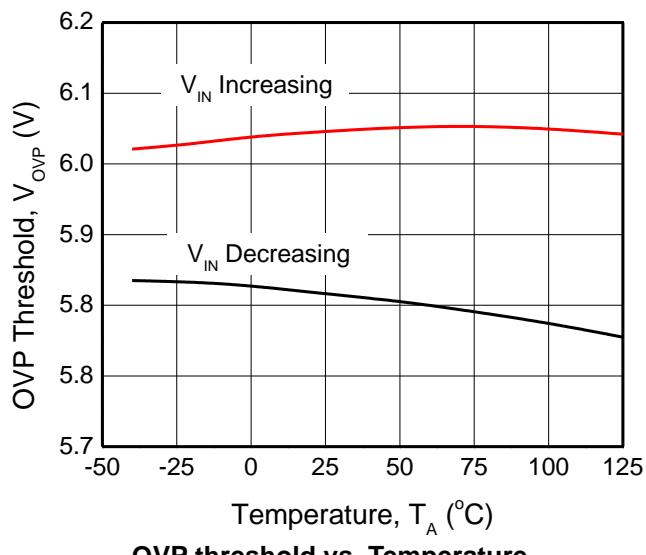
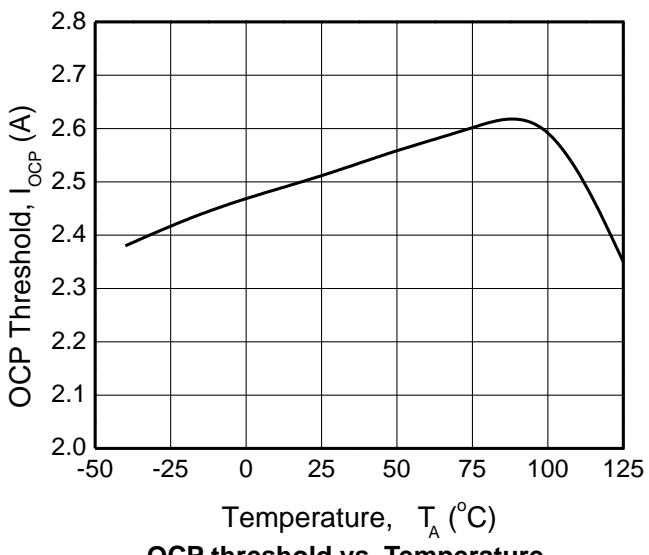
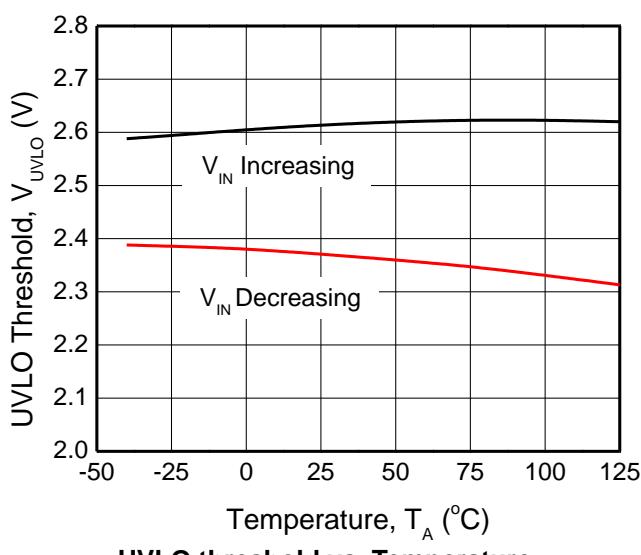
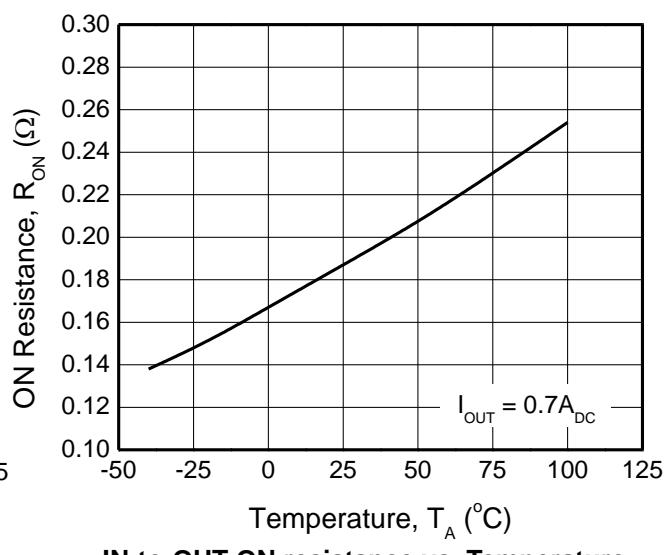
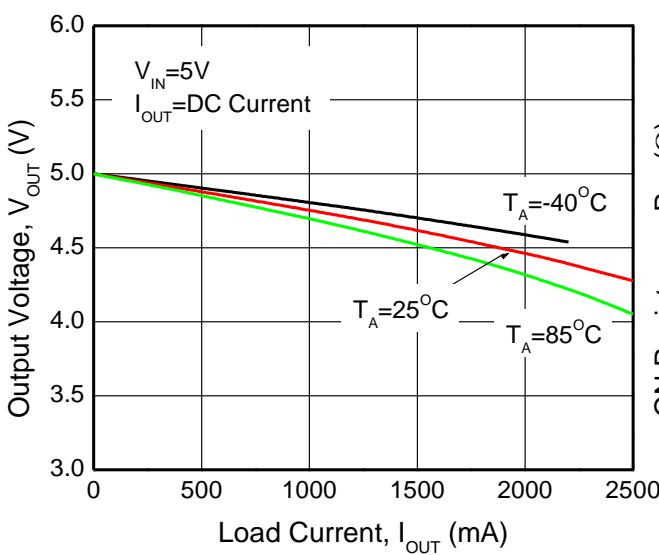
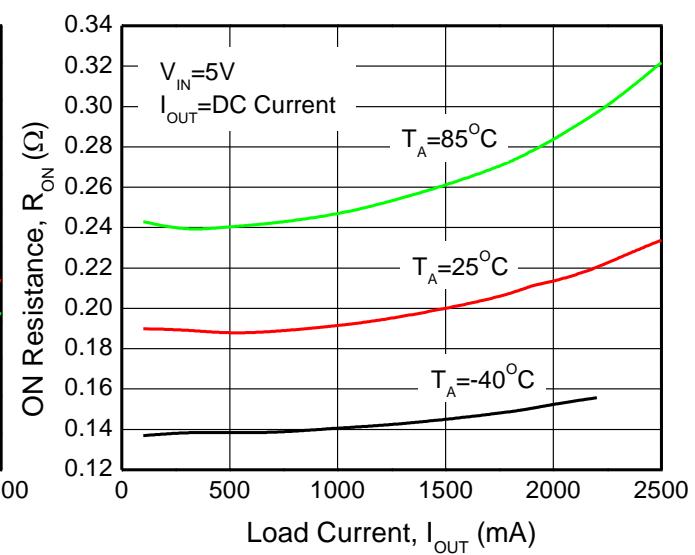
Recommend operating conditions (Ta=25°C, unless otherwise noted)

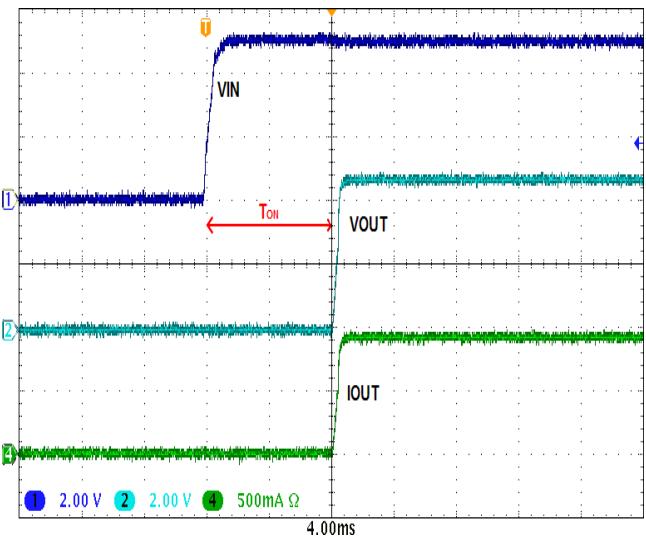
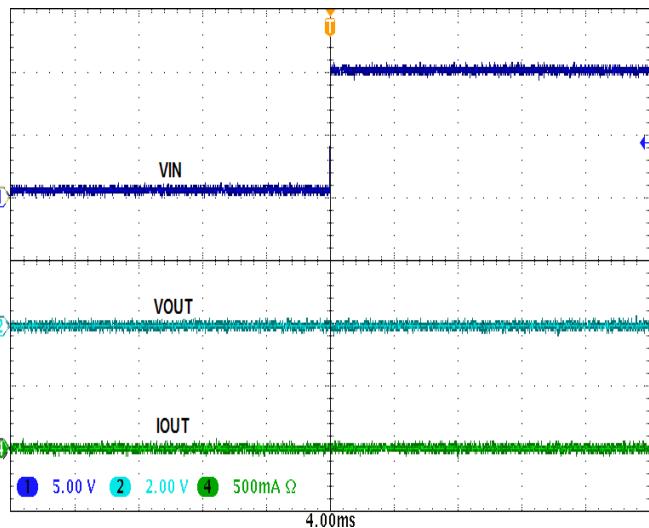
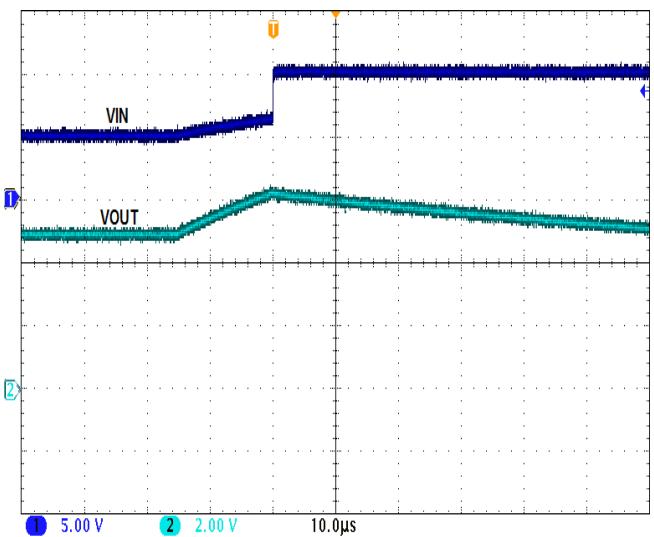
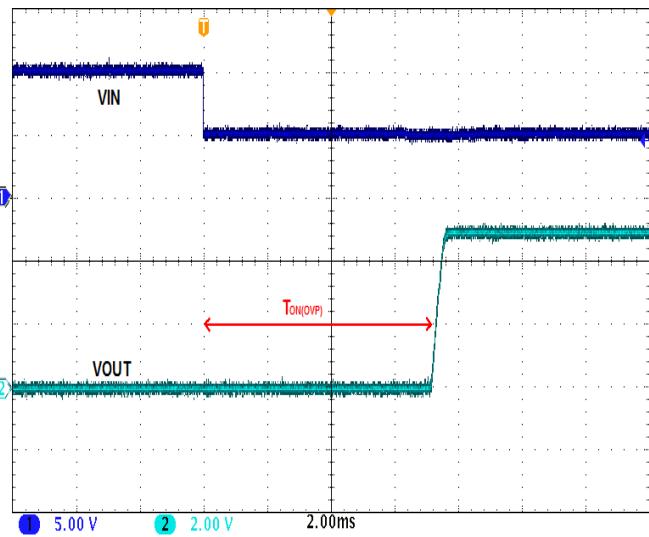
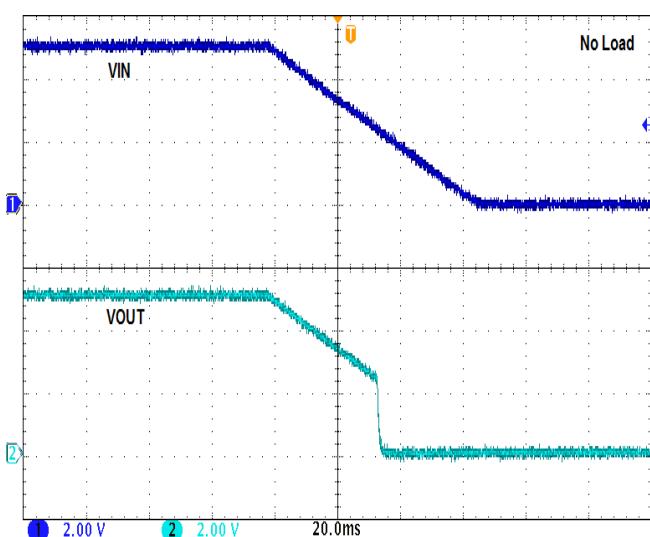
Parameter	Symbol	Value	Unit
Input voltage	V _{IN}	3 ~ 24	V
Output current	I _{OUT}	1.5	A
Ambient operating temperature	T _{OPR}	-40 ~ 85	°C

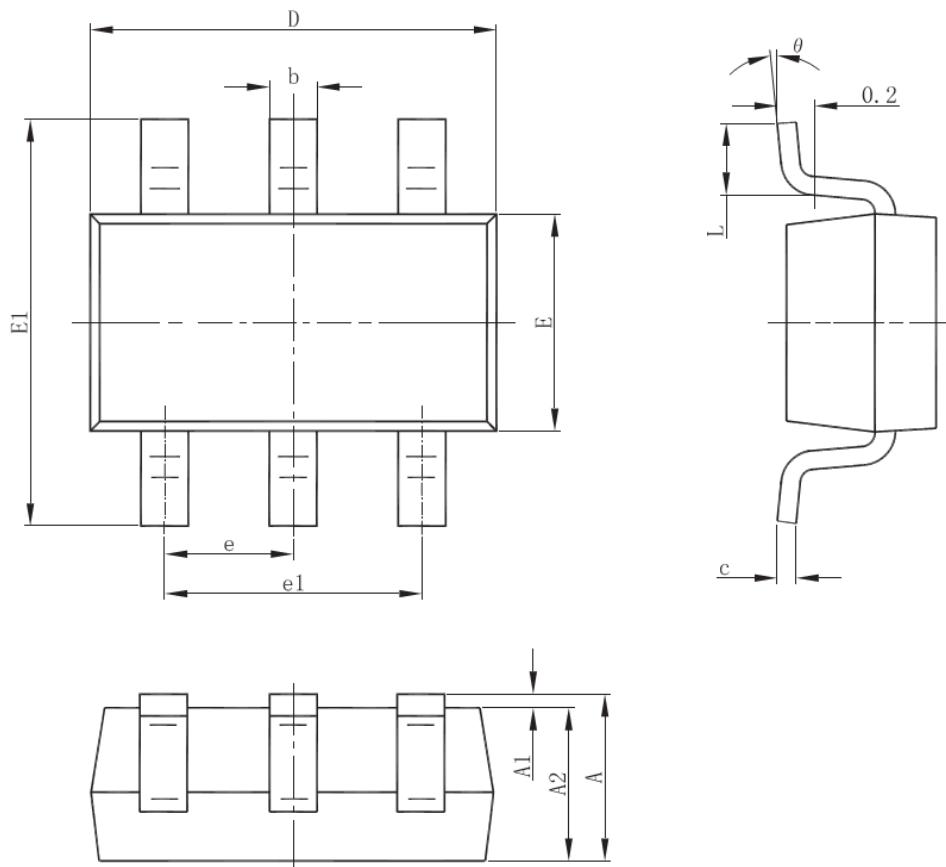
Electronics Characteristics (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Test conditions	Min.	Typ.	Max.	Unit
DC characteristics and Power-ON-Reset						
Input quiescent current	I _Q	V _{IN} =5V, I _{OUT} =0A		280	350	uA
IN-to-OUT ON resistance * ³	R _{ON}	V _{IN} =5V, I _{OUT} =0.7A		190	250	mΩ
Output discharge resistance	R _{DISCHARGE}			500		Ω
Under voltage lock out threshold	UVLO	V _{IN} increasing from 0~3V	2.3		2.8	V
Under voltage lock out hysteresis	V _{HYS-UVLO}	V _{IN} decreasing from 3~0V	200	250	300	mV
Output power-on time	T _{ON}	V _{IN} = 0 -> 5V to output ON	6	8	10	ms
Input Over-Voltage-Protection (OVP)						
OVP threshold	V _{OVP}	V _{IN} increasing from 5~7V	5.8	6.1	6.4	V
OVP hysteresis	V _{HYS-OVP}	V _{IN} decreasing from 7~5V	200	300	400	mV
OVP active time	T _{OVP}	V _{IN} = 5 -> 10V			1	us
OVP recovery time	T _{ON(OVP)}	V _{IN} = 10 -> 5V to output ON	6	8	10	ms
Input Over-Current-Protection (OCP)						
OCP threshold	I _{OCP}		2.0			A
Over-Temperature-Protection (OTP)						
OTP threshold				165		°C
OTP hysteresis				40		°C

*3: Single Pulse, Pulse width=10ms

Typical Characteristics (Ta=25°C, unless otherwise noted)

OVP threshold vs. Temperature

OCP threshold vs. Temperature

UVLO threshold vs. Temperature

IN-to-OUT ON resistance vs. Temperature

Output voltage vs. Output current

ON resistance vs. Output current


Normally Power ON

Power ON with Input Overvoltage

OVP Active Time

OVP Recovery Time

Normally Power OFF

Package outline dimensions
SOT-23-6L


Symbol	Dimensions In Millimeters		
	Min.	Typ.	Max.
A	1.050	-	1.250
A1	0.000	-	0.100
A2	1.050	-	1.150
b	0.300	0.400	0.500
c	0.100	-	0.200
D	2.820	2.900	3.020
E	1.500	1.600	1.700
E1	2.650	2.800	2.950
e	0.950 Typ.		
e1	1.800	1.900	2.000
L	0.300	-	0.600
θ	0°	-	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Management Specialised - PMIC category:

Click to view products by Will Semiconductor manufacturer:

Other Similar products are found below :

[LV5686PVC-XH](#) [FAN7710VN](#) [NCP391FCALT2G](#) [SLG7NT4081VTR](#) [SLG7NT4192VTR](#) [AP4313UKTR-G1](#) [MB39C831QN-G-EFE2](#)
[LV56841PVD-XH](#) [S6AE102A0DGN1B200](#) [MMPF0100FDAEP](#) [S6AE101A0DGNAB200](#) [NCP6924CFCHT1G](#) [AP4306BUKTR-G1](#)
[IR35217MTRPBF](#) [MIC5164YMM](#) [PT8A3252WE](#) [NCP6914AFCAT1G](#) [NCP392CSFCCT1G](#) [TEA1998TS/1H](#) [PT8A3284WE](#)
[LTC3643EUDD#PBF](#) [TEA2095T/1/S30J](#) [MCP16502TAD-E/S8B](#) [PCA9420BSAZ](#) [MC33PF8100FJES](#) [ISL91211AIKZT7AR5874](#)
[ISL91211BIKZT7AR5878](#) [ISL91212AIIZ-TR5770](#) [ISL91212BIIZ-TR5775](#) [MC34VR5100A1EP](#) [AX-3003D-3](#) [AX-3005D-3](#) [TP-1305](#) [TP-2305](#) [TP-30102](#) [TP-4503N](#) [MIC5167YML-TR](#) [MPS-3003L-3](#) [MPS-3005D](#) [NCP392ARFCCT1G](#) [SPD-3606](#) [STLUX383A](#) [TP-60052](#)
[ADN8834ACBZ-R7](#) [LM81BIMTX-3/NOPB](#) [LM81CIMT-3/NOPB](#) [LP2996AMRX/NOPB](#) [LP2996AMRENOPB](#) [LV5696P-E](#)
[ADT7462ACPZ-REEL](#)