
Dimensions: [mm]		Recommended Land Pattern: [mm]	Electrical Properties:					
			Properties		Test conditions	Value	Unit	Tol.
		w .	Impedance @ 100 MHz	Z	100 MHz	11	Ω	±25%
			Maximum Impedance	Z _{max}	1000 MHz	24	Ω	typ.
			Rated Current 1	I _{R1}	ΔT = 20 K	600	mA	max.
			Rated Current 2	I _{R2}	ΔT = 40 K	9600	mA	max.
			DC Resistance	R _{DC}	@ 20 °C	0.15	Ω	max.
			Туре		ŀ	High Speed		
0,5 ±0,3		WIDE BAND / HIGH SPEED: $W = 3,0$	Certification:					
		HIGH CURRENT: W = 4,0	RoHS Approval		Compliant [20	011/65/EU&2015/8	863]	
			REACh Approval		Conform or de	eclared [(EC)1907/2	2006]	
2,0 ±0,2	1		Halogen Free		Conform	n [JEDEC JS709B]		
		Scale - 10:1	Halogen Free		Conform	[IEC 61249-2-21]		
	0,9 ±0,2	Schematic:	Component Qualification		AEC-	-Q200 Grade 1		
The second secon			General Information: Do not use this part beyond the Rated Current as this will create excessiv component Operating Temperature -55 up to +12 Storage Conditions (in original packaging) A 0 °C ; < 75 Moisture Sensitivity Level (MSL) 1 Test conditions of Electrical Properties: +20 °C, 33 % RH if not span					m the
		Image: State of the state	CHECKED REVISION DATE (VYY-MM MBH 003.011 2020-09-3 DESCRIPTION WE-CBF SMT EMI SU Ferrite Bead	0 D	0	RDER CODE 7427920		<u></u>
		MORE THAN YOU EXPECT Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	SZE/TYPE 0805			tatus /alid		page 1/8

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized tor use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety reasonable expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety reasonable expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability valuation checks for safety must be performed on every electronic component which is used in electrical circuits additions or performance.


Typical Impedance Characteristics:



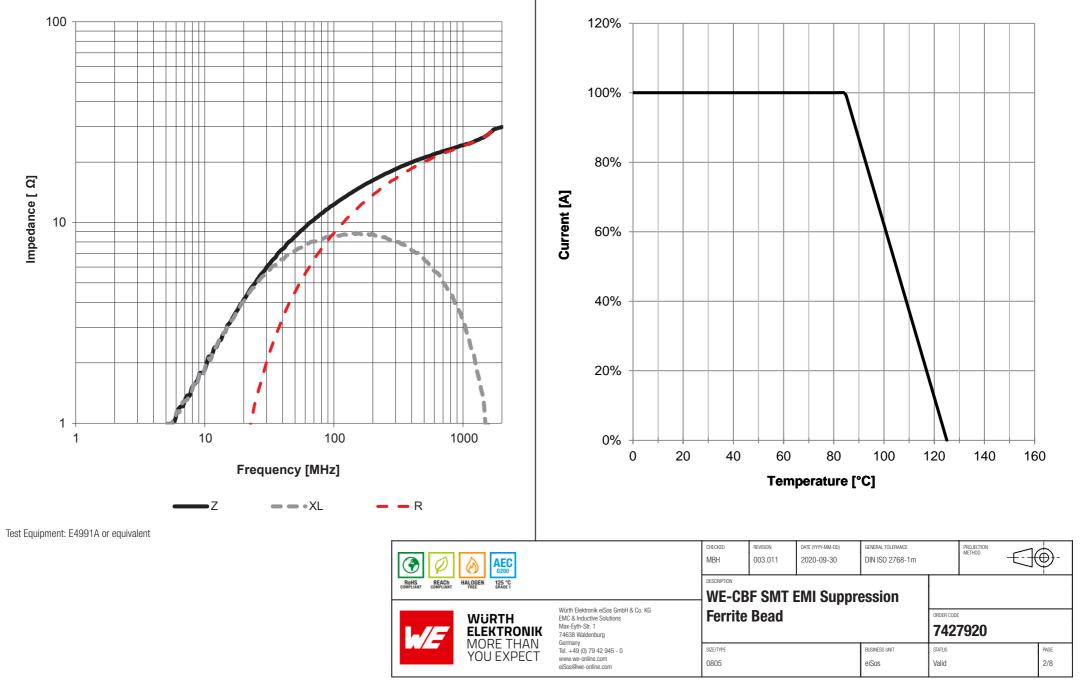

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG products are nethiner designed nor intended for use agreement specifically governing such as a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such as a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such as a higher safety standard in (automotive control, train control, ship control), train control, t


Packaging Specification - Tape: [mm]

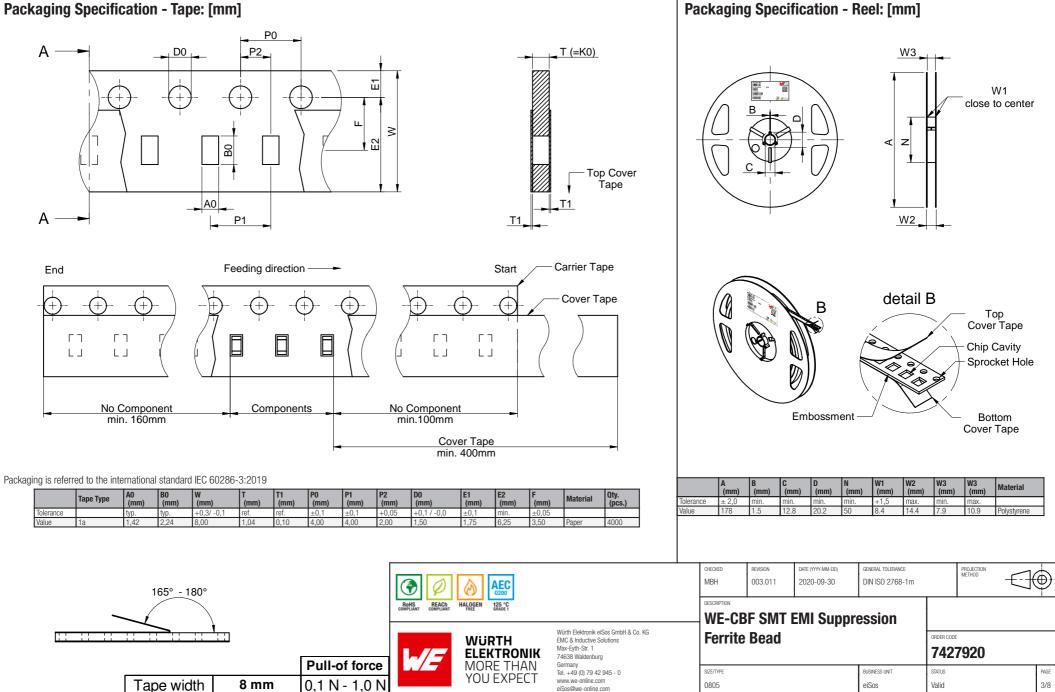

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Warth Elektronik elSos GmbH & Co KG products are neither designed nor intended for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use, Moreover Warth Elektronik elSos GmbH & Co KG must be informed on every electronic component the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high asteption released.

Packaging Specification - Inner Carton: [mm]	Packaging Specification - Middle Carton: [mm]
Provide the second seco	
Lic (mm)Wic (mm)Hic (mm)No. of Reel (pcs.)Qty. (pcs.)MaterialTolerancetyp.typ.Value185,0091,00188,00520000Paper	L _{MC} (mm) W _{MC} (mm) H _{MC} (mm) No. of Inner Carton (pcs.) Qty. (pcs.) Material Tolerance typ. typ. yp. Value 485,00 197,00 200,00 5 100000 Paper
Image: State of the state	CHECKED MBH REVISION 003.011 DATE (YYYY-MM-0D) 2020-09-30 GENERAL TOLERANCE DIN ISO 2768-1m PROJECTION DESCRIPTION WE-CBF SMT EMI Suppression Ferrite Bead ORDER CODE 7427920 SZETTYPE 0805 BUSNESS UNIT eiSos STATUS Valid PAGE 4/8

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized tor use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety reasonable expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety reasonable expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability valuation checks for safety must be performed on every electronic component which is used in electrical circuits additions or performance.

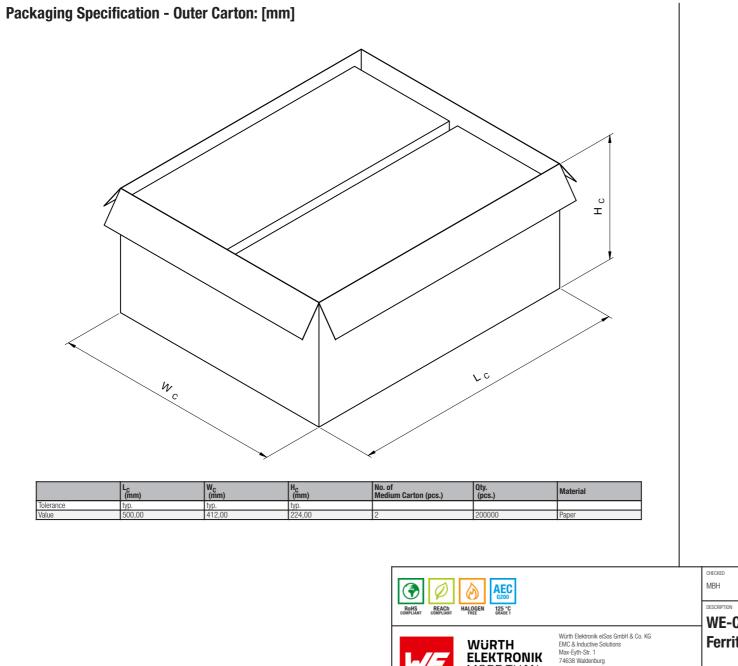

MBH	003.011	2020-09-30	DIN ISO 2768-1m		METHOD	-	€-	
WE-CB	F SMT I	EMI Suppre						
Ferrite Bead					7920			
SIZE/TYPE			BUSINESS UNIT	STATUS			PAGE	
0805			eiSos	Valid			5/8	

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized to use in equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability transportation signal, disaster prevention, medical, public information.

Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com

MORE THAN YOU EXPECT

Classification Reflow Profile for SMT components:



Classification Reflow Soldering Profile:

Profile Feature		Value
Preheat Temperature Min	T _{s min}	150 °C
Preheat Temperature Max	T _{s max}	200 °C
Preheat Time $\rm t_s$ from $\rm T_{s\ min}$ to $\rm T_{s\ max}$	t _s	60 - 120 seconds
Ramp-up Rate (T _L to T _P)		3 °C/ second max.
Liquidous Temperature	TL	217 °C
Time t_L maintained above T_L	tL	60 - 150 seconds
Peak package body temperature	Т _р	$T_p \le T_c$, see Table below
Time within 5°C of actual peak temperature	t _p	20 - 30 seconds
Ramp-down Rate (T _P to T _L)		6 °C/ second max.
Time 25°C to peak temperature		8 minutes max.

refer to IPC/ JEDEC J-STD-020E

Package Classification Reflow Temperature (T_c):

Properties	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
PB-Free Assembly I Package Thickness < 1.6 mm	260 °C	260 °C	260 °C
PB-Free Assembly Package Thickness 1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
PB-Free Assembly I Package Thickness > 2.5 mm	250 °C	245 °C	245 °C

refer to IPC/ JEDEC J-STD-020E

ROMFLIANT REACTOR HALOGEN ACCOUNTS TO THE REACTOR T		CHECKED MBH	REVISION 003.011	DATE (YYYY-MM-DD) 2020-09-30	GENERAL TOLERANCE DIN ISO 2768-1m	_	PROJECTION METHOD		€-	
		WE-CBF SMT EMI Suppression								
L//=	WÜRTH ELEKTRONIK	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany	I CITILE Dedu				ORDER CODE	7920		
	MORE THAN YOU EXPECT	einnany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	size/type 0805			BUSINESS UNIT eiSos	status Valid		1	PAGE 6/8

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability valuation checks for safety must be produced on expected on cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability valuation checks for safety must be produced on expected controlic component which is used in the relatival or cause. All the relatival or cause exerce personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik elsos GmbH & Co KG must be informed about the intent of such usage before the design-in stage.

Cautions and Warnings:

The following conditions apply to all goods within the product series of WE-CBF of Würth Elektronik eiSos GmbH & Co. KG:

General:

- This electronic component is designed and manufactured for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
 equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
 ship control), transportation signal, disaster prevention, medical, public information network, etc. where higher safety and reliability are
 especially required and/or if there is the possibility of direct damage or human injury.
- · Electronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The component is designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions
 specified in the datasheet are not met, the component may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged.
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
 Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and
 sustainability over time.
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products also apply to customer specific products.

Product specific:

Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty. Wave soldering is
 allowed for components bigger than 0805 after evaluation and approval.
- · All other soldering methods are at the customers' own risk.

Cleaning and Washing:

• Washing agents used during the production to clean the customer application might damage or change the characteristics of the wire insulation, marking or plating. Washing agents may have a negative effect on the long-term functionality of the product.

Potting:

If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the core. Expansion could damage the components. We recommend a
manual inspection after potting to avoid these effects.

Storage Conditions:

- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

Packaging:

 The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured.

Handling:

- · Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty
- The temperature rise of the component must be taken into consideration. The operating temperature is comprised of ambient temperature and temperature rise of the component. The operating temperature of the component shall not exceed the maximum temperature specified.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

		CHECKED MBH	REVISION 003.011	DATE (YYYY-MM-DD) 2020-09-30	general tolerance DIN ISO 2768-1m		METHOD -E	36	<i>)</i> -	
		DESCRIPTION	F SMT I	EMI Suppre	ession					
-//5		Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany	Ferrite	Bead			ORDER CODE			
	MORE THAN YOU EXPECT	Tel. +49 (0) 79 42 945 - 0 www.we-online.com	SIZE/TYPE			BUSINESS UNIT	STATUS		PAG	GE

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik eSos GmbH & Co KG must be information network etc... Wurth Elektronik eSos GmbH & Co KG must be information network etc... Wurth Elektronic component which is used in editability functions or performance.

Important Notes

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

ROHS COMPLIANT COMPLIANT HALOGEN 225 °C 2800		CHECKED MBH	REVISION 003.011	DATE (YYYY-MM-DD) 2020-09-30	GENERAL TOLERANCE DIN ISO 2768-1m	_	PROJECTION METHOD		€-	
		WE-CBF SMT EMI Suppression								
		Germany	Ferrite	Bead			ORDER CODE 742	7920		
MORE THAN YOU EXPECT	SIZE/TYPE 0805				BUSINESS UNIT eiSos	status Valid		1	PAGE 8/8	

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wirth Elektronik elSos GmbH & Co KG products are neither designed on rinended for use in equipment which is used in effective (a transportation (automotive control, train control, ship control, train control, ship control, train control, trai

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ferrite Beads category:

Click to view products by Wurth manufacturer:

Other Similar products are found below :

 CZB1EGTTP700P
 CZB1JGTTD101P
 CZB1JGTTD151P
 CZB1JGTTD601P
 CZB2AFTTD800P
 CZB2AGTTD601P
 CZB2BFTTE600P

 EMI0805R-11
 NCB0603R301TR050F
 NCB0805A320TR050F
 NCB-H1206B680TR300F
 SMB2.5-1TR
 SMB2.5R-2
 2943778301

 CZB1EGTTP121P
 CZB1JGTTD102P
 CZB1JGTTD121P
 CZB1JGTTD221P
 CZB2AGTTD301P
 CZB2BFTTE601P
 4221R-1
 4221R-2

 4221R-3
 EMI0805R-2000
 EMI0805R-600
 SBY100505T-100Y-N
 NCB-GH0402D121TR060F
 NCB-H1812D125TR150F

 CZB2AGTTD102P
 NCB0402P301TR005F
 NCB0603R152TR030F
 NCB0805A121TR050F
 NCB312K900TR500F
 NCB

 H0805A102TR150F
 NCB-H0805A221TR300F
 NCB-H1806E181TR300F
 NCB0402P300TR030F
 NCB0402P700TR050F

 NCB0805A102TR040F
 NCB1806E151TR020F
 NCB-H0603R121TR300F
 NCB-H0805A220TR600F
 NCB-H0805A390TR400F

 CIM21J252NE
 CZB2BFTTE121P
 EMI0805R-220
 74279250
 7427924
 CZB1JGTTD202P
 ABUPDE160808121Y00