


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect





ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE	
D.C. RESISTANCE	5-2	tie(2+3, 4+5), @20°C	0.011 ohms max.
D.C. RESISTANCE	9-13	tie(9+10, 12+13), @20°C	0.011 ohms max.
D.C. RESISTANCE	7-6	@20°C	0.035 ohms ±20%
INDUCTANCE	5-2	tie(2+3, 4+5), 10kHz, 100mVAC, Ls	14.0uH ±10%
SATURATION CURRENT	20% rolloff from initial		25.9A
LEAKAGE INDUCTANCE	5-2	tie(2+3, 4+5, 6+7, 9+10+12+13), 100kHz, 10mVAC, Ls	140nH typ., 280nH max.
DIELECTRIC	2-13	tie(4+5+6, 9+10), 1500VAC, 1 second	-
TURNS RATIO	(5-3):(9-12)		1:1, ±1%
TURNS RATIO	(5-3):(10-13)		1:1, ±1%
TURNS RATIO	(5-3):(4-2)		1:1, ±1%
TURNS RATIO	(5-3):(7-6)		1.25:1, ±1%

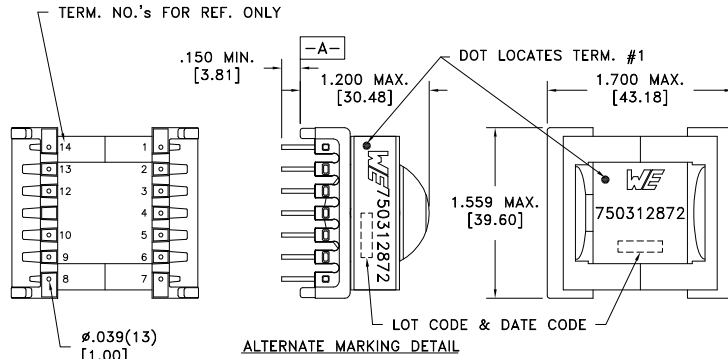

ALTERNATE MARKING DETAIL
PART MUST INSERT FULLY TO SURFACE A IN RECOMMENDED GRID

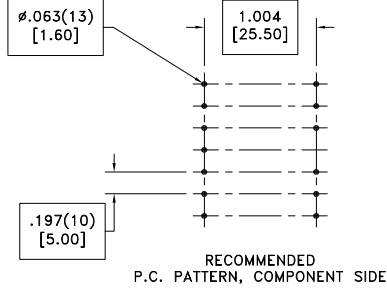

Customer to tie terminals 2+3, 4+5, 9+10, 12+13 together on PCB.

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Safety Standard Undefined.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-0904 www.we-online.com/midcom	CONVENTION PLACEMENT
6B	10/14		
6A	6/12	SEE REVISION SHEET FOR REVISION LEVEL	

Tolerances unless otherwise specified:
Angles: ±1°
Fractions: ±1/64
Decimals: ±.005 [.13]
Footprint: ±.001 [.03]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 750312872

compliant RoHS

PART NO.
750312872

SPECIFICATION SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Transformers](#) category:

Click to view products by [Würth](#) manufacturer:

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)