

CUSTOMER	TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%,	Ag4%	Yes	Yes



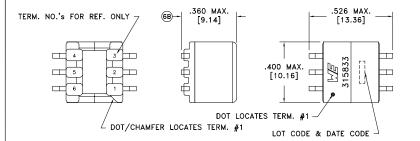

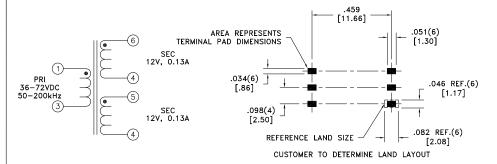

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER		TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3	@20°C	0.796 ohms ±10%
D.C. RESISTANCE	6-4	@20°C	0.348 ohms ±10%
D.C. RESISTANCE	5-4	@20°C	0.457 ohms ±10%
INDUCTANCE	1-3	10kHz, 100mVAC, Ls	150.0uH ±10%
SATURATION CURRENT	1-3	20% rolloff from initial	800mA
LEAKAGE INDUCTANCE	1-3	tie(4+5+6), 100kHz, 100mVAC, Ls	1.5uH typ., 3uH max.
DIELECTRIC	1-6	1875VAC, 1 second	1500VAC, 1 minute
TURNS RATIO		(1-3):(6-4)	2:1, ±1%
TURNS RATIO		(1-3):(5-4)	2:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:

- Functional insulation for a primary circuit at a working voltage of 265Vrms, 400Vpeak, Overvoltage Category II.

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	+ -
		Method: Tape & Reel	(A)-F
		PKG-0519	Ψ
6B	2/21	www.we-online.com/midcom	CONVENTION PLACEMENT
6A	2/16	SEE REVISION SHEET FOR	REVISION LEVEL

VENTION PLACEMENT

Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Footprint: ±.005 [.13] Fractions: ±1/64

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

TRANSFORMER

eiSos p/n: **750315833**

PART NO.

750315833

SPECIFICATION SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Transformers category:

Click to view products by Wurth manufacturer:

Other Similar products are found below:

ET-030A F-102X F-120X F-14X-1 F-181U F-18A F-199U F-19X F-202U F-204U F-206U F-227X F-238U F-239U-1 F-23U F24-250-B
F-242U F-245U F-264U F-265U F-267U F-281U F-283U F-290X F-295Z F-296Z F-298Z F-3143P F-3298Z F-33U F-346X F-35U F364U F-392A F-395X F-397U F-412X F-47U F-55X-1 F-60U F-68U F-71U F-72Z F-74U F-83A F-84AC F-85U F-86U F-9U PCT-02