
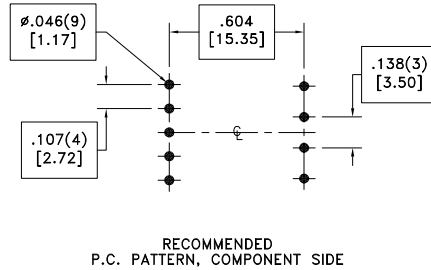



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

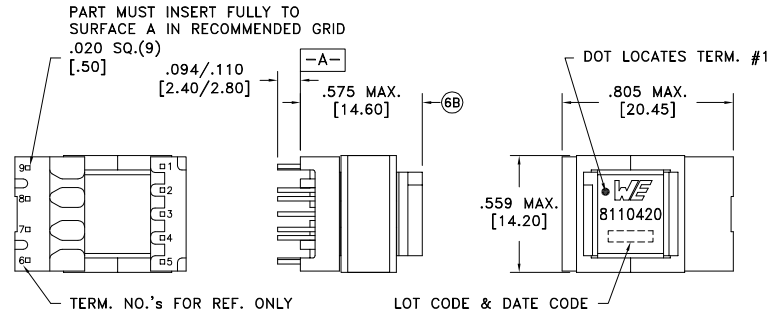

6C ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	3.96 ohms ±10%
D.C. RESISTANCE	5-4 @20°C	1.74 ohms ±10%
6D D.C. RESISTANCE	7-9 @20°C	0.75 ohms ±10%
INDUCTANCE	1-3 10kHz, 100mVAC, Ls	1.95mH ±10%
SATURATION CURRENT	20% rolloff from initial	320mA
LEAKAGE INDUCTANCE	1-3 tie(4+5, 7+9), 100kHz, 100mVAC, Ls	22.0uH typ., 33.0uH max.
6C DIELECTRIC	3-7 tie(3+4), 4500VAC, 1 second	3600VAC, 1 minute
TURNS RATIO	(3-1):(7-9)	2.565:1, ±1%
TURNS RATIO	(3-1):(5-4)	3.806:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:

- Reinforced insulation for a primary circuit at a working voltage of 400VDC.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. <b>7508110420</b>
6D	12/18	Method: Tray		Decimals: ±.005 [.13]		
6C	3/18	PKG-0995		Footprint: ±.001 [.03]		
6B	7/17	www.we-online.com/midcom		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		
6A	9/14	SEE REVISION SHEET FOR REVISION LEVEL				



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Transformers](#) category:*

*Click to view products by [Würth](#) manufacturer:*

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)  
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)  
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)