




Dimensions (In.)

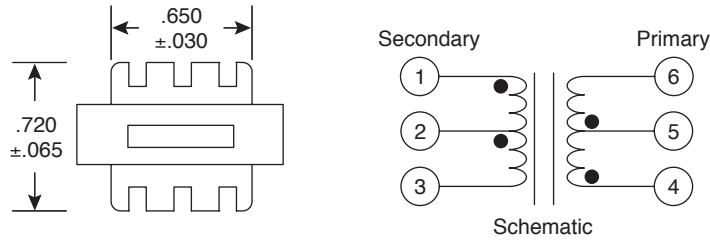

Specifications

- Core type / size: EI-24
- Impedance variation: $\pm 10\%$ @ 1KHz
- D.C. resistance: $\pm 15\%$
- Isolation voltage(primary to secondary): 100VDC min. @ 10M Ω
- Breakdown voltage: 100VAC hipot for 1 minute
- Insulation: $>10M\Omega$ @ 100VDC
- Max. output: 460mW
- Frequency response: $\pm 3dB$, 300-3.4KHz @ 1KHz 0dB
- Waxing: vacuum treatment
- Can be water washed with water temperature less than 20°C
- RoHS Compliant

Mouser Stock No.	Impedance		Resistance	
	Primary	Secondary	Primary	Secondary
42TU002-RC	10K Ω	2K Ω	600 Ω	155 Ω
42TU003-RC	1.2K Ω	8 Ω	75 Ω	1 Ω
42TU008-RC	800 Ω	8 Ω	40 Ω	1 Ω
42TU011-RC	1.5K Ω	500 Ω	120 Ω	50 Ω
42TU012-RC	10K Ω	5K Ω	425 Ω	220 Ω
42TU013-RC	1K Ω	8 Ω	75 Ω	1 Ω
42TU016-RC	600 Ω	600 Ω	65 Ω	55 Ω
42TU019-RC	10K Ω	600 Ω	600 Ω	100 Ω
42TU048-RC	48 Ω	8 Ω	2.5 Ω	0.5 Ω
42TU120-RC	120 Ω	8 Ω	7 Ω	0.7 Ω
42TU200-RC	200 Ω	8 Ω	12 Ω	0.5 Ω
42TU400-RC	500 Ω	8 Ω	18 Ω	0.7 Ω
42TU500-RC	500 Ω	500 Ω	35 Ω	28 Ω



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [Xicon](#) manufacturer:

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5079NLT](#) [H5084FNLT](#)
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [T1142NL](#) [HX6101FNL](#) [HX5084FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#)
[1879732-1](#)