

150 Watts

- Medical & IT Safety Approvals
- Energy Efficiency Level VI & EU CoC Tier 2 Compliant
- 4th Edition Medical EMC
- IP32 Environmental Rating
- Class I and Class II Versions
- <0.15 W Standby Power
- 0 °C to 60 °C Operation
- Low Earth Leakage Current
- 3 Year Warranty



Dimensions:

ALM150:
7.323 x 2.843 x 1.496" (186.0 x 72.0 x 38.0 mm)

The ALM150 series of medical external power supplies is fully approved to international medical & IT safety standards. It has been designed with very high efficiency and low standby power, enabling it to meet the latest environmental legislation. The unit has a fully sealed enclosure complying with IP32 and a smooth surface finish making it easier to wipe down in a clinical setting.


Models & Ratings

Output Power	Output Voltage	Output Current	Total Regulation	Model Number ^(1,2,3)
150 W	12.0 V	12.5 A	±5%	ALM150PS12
	15.0 V	10.0 A		ALM150PS15
	19.0 V	7.9 A		ALM150PS19
	24.0 V	6.2 A		ALM150PS24
	48.0 V	3.1 A		ALM150PS48

Notes

- For class II versions, add suffix 'C2-8' to the end of the part number e.g. ALM150PS24C2-8.
- For optional input connector retention clip add suffix '-A' to the model number, e.g. ALM150PS24-A (not available for C2 versions)
- Power de-rated <100 VAC for 12 & 15 V models, refer to input specifications.

Mechanical Details

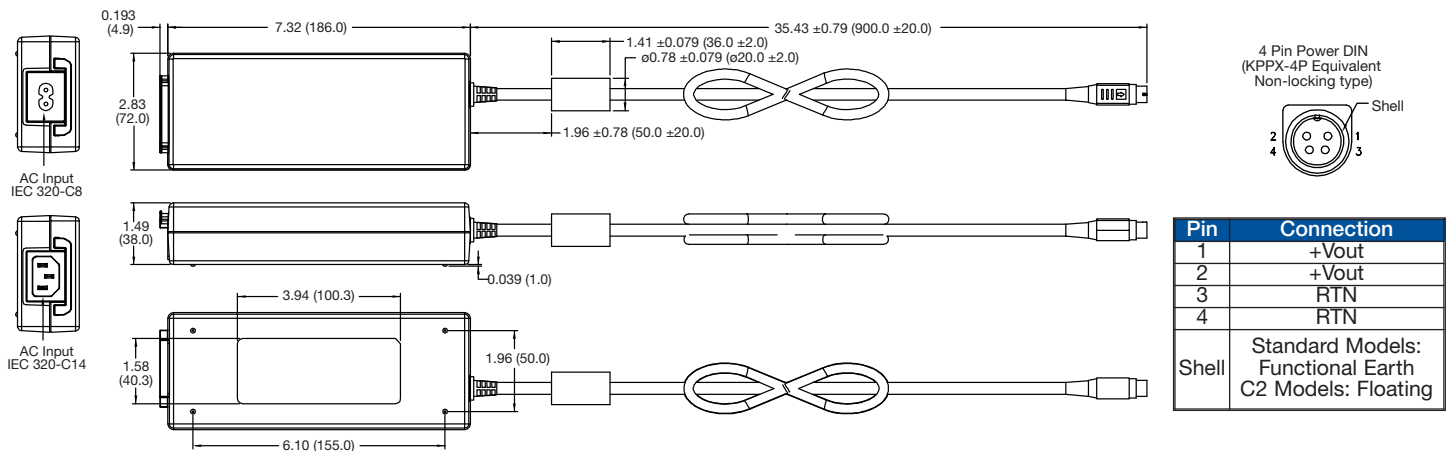

Notes

- All dimensions shown in inches (mm). Tolerance is 0.02 (0.5) maximum, except output cable length.
- Weight: 1.4 lbs (635 g) approx.
- For European mains lead order part EU-MAINS-IEC for C14 versions, or EU-MAINS-8 for C8 versions.
- For UK mains lead order part UK-MAINS-IEC for C14 versions, or UK-MAINS-8 for C8 versions.
- For US mains lead order part US-MAINS-IEC for C14 versions, or US-MAINS-8 for C8 versions.
- Output connector: 4 pin power din with pin 1 & 2 - positive and pin 3 & 4 - return, equivalent to KPPX-4P (non-locking).

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage	80		264	VAC	19, 24 & 48V models: Derate linearly from 100% load at 90 VAC to 80% load at 80 VAC, 300 VAC/5s maximum. 12 & 15V models: Derate linearly from 100% load at 100 VAC to 80% load at 80 VAC, 300 VAC/5s maximum.
Input Frequency	47		63	Hz	
Input Current		1.8/0.9		A	Measured at 115/230 VAC
Inrush Current			160	A	230 VAC, cold start at 25 °C
Power Factor		>0.9			EN61000-3-2 Class A
Earth Leakage Current			250	µA	264 VAC, 60 Hz
No Load Input Power			0.15	W	
Input Protection	T3.15A/250 VAC internal fuse in both line & neutral				


Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage	12		48	VDC	See Models and Ratings table
Initial Set Accuracy			±2	%	At 50% load
Minimum Load					No minimum load required
Start Up Delay		1	2	s	
Start Up Rise Time			50	ms	
Hold Up Time	20	30		ms	Full load and 115/230 VAC
Line Regulation			±0.5	%	
Total Regulation			±5	%	
Transient Response			4	%	Maximum deviation, recovering to less than 1% within 500 µs for 50-75-50% load change
Ripple and Noise			1.5	% pk-pk	20 MHz bandwidth, measured with 20 MHz Bandwidth and 10 µF electrolytic in parallel with 0.1 µF ceramic capacitor.
Overshoot		5	10	%	At turn on / turn off
Overload Protection	115		175	%	
Overvoltage Protection			150	%	Recycle mains to reset
Short Circuit Protection	Trip and restart (hiccup), auto resetting				
Thermal Protection	Measured internally, auto resetting				
Temperature Coefficient		0.02		%/°C	
Patent Leakage Current			95	µA	264 VAC, 60 Hz

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	0		+60	°C	Derate from 100% load at 40 °C to 30% load at 60 °C
Cooling	Natural convection				
Operating Humidity	5		95	%RH	Non-condensing
Storage Temperature	-25		+80	°C	
Operating Altitude			5000	m	
Shock	IEC68-2-27, 30 g, 11 ms half sine, 3 times in each of 6 axes				
Vibration	IEC68-2-6, 10-500 Hz, 2 g 10 mins/sweep, 60 mins for each of 3 axes				

Derating Curve

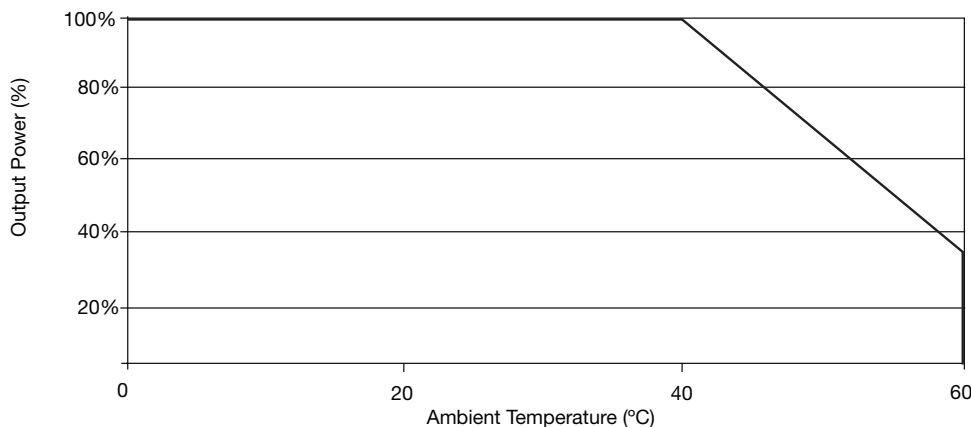


General


Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency		93		%	See curves.
Isolation: Input to Output Input to Ground Output to Ground			4000	VAC	2 x MOPP
			1500	VAC	1 x MOPP (Class I versions only)
			500	VAC	Class I versions only
Switching Frequency	45		140	kHz	PFC
	85		190		Main Converter
Power Density		4.83		W/in ³	
Mean Time Between Failure		>300		kHrs	MIL-HDBK-217F at 25 °C GB
Weight		1.4 (635)		lb (g)	

Efficiency Curves

ALM150PS12

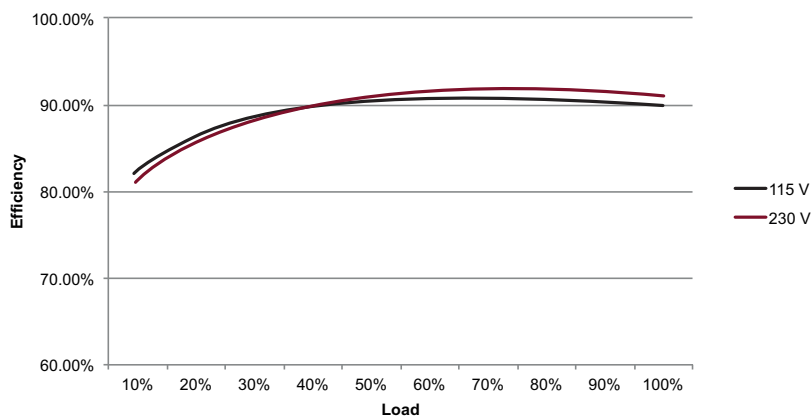

ALM150PS24

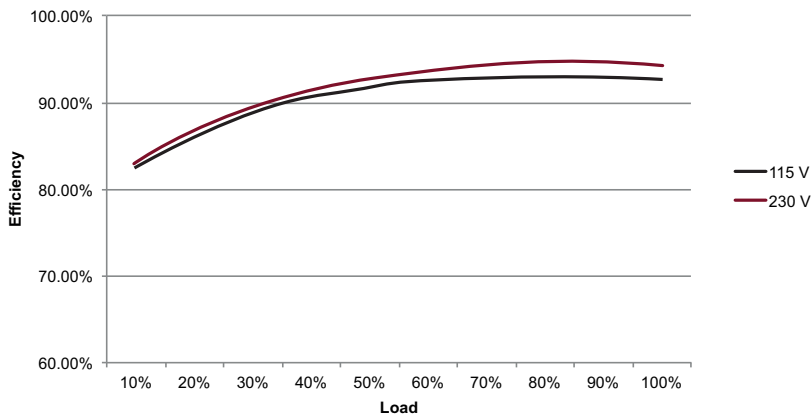

EMC: Emissions

Phenomenon	Standard	Test Level	Notes & Conditions
Emissions	EN55032	Level B	Conducted & Radiated
Harmonic Current	EN61000-3-2	Class A	
Voltage Flicker	EN61000-3-3		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [osepp electronics](#) manufacturer:

Other Similar products are found below :

[LS-00039](#) [LS-3006](#) [LS-00001](#) [LS-00038](#) [BTH-01](#) [LS-00024](#) [2WBAL-01](#) [DB9WACC](#) [LINE-01](#) [LS-00160](#) [LS-00145](#) [LS-00146](#) [LS-00129](#)
[LS-00147](#) [LS-00130](#) [LS-00109](#) [LS-00128](#) [LS-00112](#) [LS-00113](#) [LS-00127](#) [LS-00161](#) [LS-00106](#) [LS-00075](#) [LS-00110](#) [LS-00094](#) [LS-00164](#)
[LS-00098](#) [LS-00056](#) [LS-00053](#) [LS-00099](#) [LS-00084](#) [LS-00054](#) [LS-00055](#) [LS-00090](#) [LS-5010SR](#) [LS-00132](#) [LS-00131](#) [LS-00080](#) [LS-00079](#)
[LS-5010CR](#) [TRITANK-01](#) [LS-00042](#) [DB6WACC](#) [LS-00031](#) [DB8WACC](#) [PROTO-01](#) [LS-00086](#) [TANK-01](#) [LS-00025](#) [LS-00029](#)