

4/6 Watts

JTC Series



- 4:1 Input Range
- DIP-24 Metal Package
- Operating Temperature $-40\text{ }^{\circ}\text{C}$ to $+100\text{ }^{\circ}\text{C}$
- Single & Dual Outputs
- Continuous Short Circuit Protection
- 1500 VDC Isolation, 3500 VDC Option
- 3 Year Warranty

Specification

Input

Input Voltage Range	<ul style="list-style-type: none"> • 24 V (9-36 VDC) • 48 V (18-72 VDC)
Input Current	<ul style="list-style-type: none"> • See table
Input Filter	<ul style="list-style-type: none"> • Pi network
Input Reflected Ripple	<ul style="list-style-type: none"> • 35 mA pk-pk through 12 μH inductor
Input Surge	<ul style="list-style-type: none"> • 24 V models 40 VDC for 100 ms • 48 V models 80 VDC for 100 ms
Undervoltage Lockout	<ul style="list-style-type: none"> • None
Input Reverse Voltage Protection	<ul style="list-style-type: none"> • None

Output

Output Voltage	<ul style="list-style-type: none"> • See table
Output Voltage Balance	<ul style="list-style-type: none"> • $\pm 1\%$ max, dual output models
Minimum Load	<ul style="list-style-type: none"> • No minimum load required
Initial Set Accuracy	<ul style="list-style-type: none"> • $\pm 1\%$ max
Start Up Delay	<ul style="list-style-type: none"> • < 800 ms
Start Up Rise Time	<ul style="list-style-type: none"> • < 10 ms
Line Regulation	<ul style="list-style-type: none"> • $\pm 0.5\%$ max
Load Regulation	<ul style="list-style-type: none"> • $\pm 0.5\%$ max, $\pm 1.5\%$ max for 3.3 V and ± 3.3 V models
Cross Regulation	<ul style="list-style-type: none"> • $\pm 5\%$ on dual output models (see note 4)
Transient Response	<ul style="list-style-type: none"> • $< 1.5\%$ max deviation, recovery to within 1% in 200 μs for a 50% load change
Ripple & Noise	<ul style="list-style-type: none"> • 60 mV pk-pk for 3.3 V to 15 V models, 100 mV pk-pk for 18 V models, 150 mV pk-pk for 24 V models, 20 MHz bandwidth
Short Circuit Protection	<ul style="list-style-type: none"> • Trip & restart (Hiccup mode), auto recovery
Maximum Capacitive Load	<ul style="list-style-type: none"> • See tables
Temperature Coefficient	<ul style="list-style-type: none"> • $\pm 0.02/^{\circ}\text{C}$ max

General

Efficiency	<ul style="list-style-type: none"> • See tables
Isolation Voltage	<ul style="list-style-type: none"> • 1500 VDC Input to Output, for optional high isolation version 3500 VDC input to output add suffix '-H' to model number • 1000 VDC Input to Case • 1000 VDC Output to Case
Isolation Resistance	<ul style="list-style-type: none"> • $10^9\Omega$
Switching Frequency	<ul style="list-style-type: none"> • 266 kHz typical
Power Density	<ul style="list-style-type: none"> • JTC04: 10 W/in³, JTC06: 15 W/in³
MTBF	<ul style="list-style-type: none"> • > 1.0 Mhrs to MIL-HDBK-217F at 25 $^{\circ}\text{C}$, GB

Environmental

Operating Temperature	<ul style="list-style-type: none"> • $-40\text{ }^{\circ}\text{C}$ to $+100\text{ }^{\circ}\text{C}$, derate from 100% load at $+85\text{ }^{\circ}\text{C}$ to no load at $+100\text{ }^{\circ}\text{C}$
Case Temperature	<ul style="list-style-type: none"> • $+100\text{ }^{\circ}\text{C}$ max
Storage Temperature	<ul style="list-style-type: none"> • $-40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$
Humidity	<ul style="list-style-type: none"> • Up to 95%, non-condensing
Cooling	<ul style="list-style-type: none"> • Natural convection

EMC

Emissions	<ul style="list-style-type: none"> • EN55022 class A conducted with external components - see application note
ESD Immunity	<ul style="list-style-type: none"> • EN61000-4-2, 8 kV air discharge Perf Criteria A, 4 kV contact discharge Perf Criteria A
EFT/Burst	<ul style="list-style-type: none"> • EN61000-4-4, level 1, Perf Criteria A
Conducted Immunity	<ul style="list-style-type: none"> • EN61000-4-6, 3 Vrms, Perf Criteria A
Magnetic Fields	<ul style="list-style-type: none"> • EN61000-4-8, 1 A/m, Perf Criteria A


Input Voltage	Output Voltage	Output Current	Input Current ⁽²⁾		Maximum Capacitive Load ⁽³⁾	Efficiency	Model Number ⁽¹⁾
			No Load	Full Load			
9-36 V	3.3 V	1200 mA	12 mA	220 mA	1000 µF	75%	JTC0424S3V3
	5.0 V	800 mA	15 mA	211 mA	1000 µF	79%	JTC0424S05
	9.0 V	445 mA	12 mA	201 mA	220 µF	83%	JTC0424S09
	12.0 V	333 mA	15 mA	203 mA	100 µF	82%	JTC0424S12
	15.0 V	267 mA	15 mA	203 mA	220 µF	82%	JTC0424S15
	18.0 V	223 mA	15 mA	203 mA	10 µF	82%	JTC0424S18
	24.0 V	167 mA	18 mA	203 mA	220 µF	82%	JTC0424S24
	±3.3 V	±606 mA	12 mA	222 mA	±470 µF	75%	JTC0424D03
	±5.0 V	±400 mA	15 mA	211 mA	±100 µF	79%	JTC0424D05
	±9.0 V	±222 mA	18 mA	208 mA	±47 µF	80%	JTC0424D09
	±12.0 V	±167 mA	15 mA	203 mA	±47 µF	82%	JTC0424D12
	±15.0 V	±134 mA	20 mA	208 mA	±10 µF	80%	JTC0424D15
	±24.0 V	±84 mA	18 mA	208 mA	±22 µF	80%	JTC0424D24
	18-72 V	3.3 V	1200 mA	10 mA	110 mA	1000 µF	76%
5.0 V		800 mA	8 mA	106 mA	470 µF	79%	JTC0448S05
9.0 V		445 mA	10 mA	100 mA	330 µF	83%	JTC0448S09
12.0 V		333 mA	12 mA	104 mA	1000 µF	80%	JTC0448S12
15.0 V		267 mA	10 mA	99 mA	47 µF	84%	JTC0448S15
18.0 V		223 mA	10 mA	99 mA	10 µF	84%	JTC0448S18
24.0 V		167 mA	15 mA	102 mA	22 µF	82%	JTC0448S24
±3.3 V		±606 mA	10 mA	107 mA	±680 µF	78%	JTC0448D03
±5.0 V		±400 mA	15 mA	106 mA	±330 µF	79%	JTC0448D05
±9.0 V		±222 mA	15 mA	104 mA	±47 µF	80%	JTC0448D09
±12.0 V		±167 mA	12 mA	102 mA	±100 µF	82%	JTC0448D12
±15.0 V		±134 mA	15 mA	104 mA	±100 µF	80%	JTC0448D15
±24.0 V		±84 mA	15 mA	104 mA	±10 µF	80%	JTC0448D24

Input Voltage	Output Voltage	Output Current	Input Current ⁽²⁾		Maximum Capacitive Load ⁽³⁾	Efficiency	Model Number ⁽¹⁾
			No Load	Full Load			
9-36 V	3.3 V	1400 mA	12 mA	253 mA	1000 µF	76%	JTC0624S3V3
	5.0 V	1200 mA	10 mA	312 mA	1000 µF	80%	JTC0624S05
	9.0 V	667 mA	12 mA	301 mA	220 µF	83%	JTC0624S09
	12.0 V	500 mA	15 mA	301 mA	1000 µF	83%	JTC0624S12
	15.0 V	400 mA	18 mA	301 mA	470 µF	83%	JTC0624S15
	18.0 V	334 mA	15 mA	301 mA	47 µF	83%	JTC0624S18
	24.0 V	250 mA	18 mA	305 mA	47 µF	82%	JTC0624S24
	±3.3 V	±909 mA	12 mA	338 mA	±470 µF	74%	JTC0624D03
	±5.0 V	±600 mA	10 mA	312 mA	±680 µF	80%	JTC0624D05
	±9.0 V	±333 mA	18 mA	309 mA	±100 µF	81%	JTC0624D09
	±12.0 V	±250 mA	20 mA	301 mA	±330 µF	83%	JTC0624D12
	±15.0 V	±200 mA	22 mA	305 mA	±100 µF	82%	JTC0624D15
	±24.0 V	±125 mA	18 mA	312 mA	±22 µF	80%	JTC0624D24
	18-72 V	3.3 V	1400 mA	15 mA	126 mA	1000 µF	76%
5.0 V		1200 mA	8 mA	156 mA	1000 µF	80%	JTC0648S05
9.0 V		667 mA	10 mA	153 mA	220 µF	82%	JTC0648S09
12.0 V		500 mA	10 mA	151 mA	1000 µF	83%	JTC0648S12
15.0 V		400 mA	10 mA	149 mA	100 µF	84%	JTC0648S15
18.0 V		334 mA	10 mA	151 mA	10 µF	83%	JTC0648S18
24.0 V		250 mA	12 mA	151 mA	22 µF	83%	JTC0648S24
±3.3 V		±909 mA	10 mA	162 mA	±330 µF	77%	JTC0648D03
±5.0 V		±600 mA	10 mA	158 mA	±470 µF	79%	JTC0648D05
±9.0 V		±333 mA	15 mA	154 mA	±100 µF	81%	JTC0648D09
±12.0 V		±250 mA	10 mA	152 mA	±100 µF	82%	JTC0648D12
±15.0 V		±200 mA	15 mA	149 mA	±47 µF	84%	JTC0648D15
±24.0 V		±125 mA	15 mA	154 mA	±22 µF	81%	JTC0648D24

Notes

- For optional 3500 VDC isolation add suffix '-H' to model number. For optional plastic case, add suffix '-P' to model number. For both options add suffix '-HP' to model number.
- Input current measured at nominal input voltage.
- Maximum capacitive load is per output.
- Cross regulation for duals is ±5% when one output is at 100% and the other is varied between 25% and 100%.


Mechanical Details and Application Note

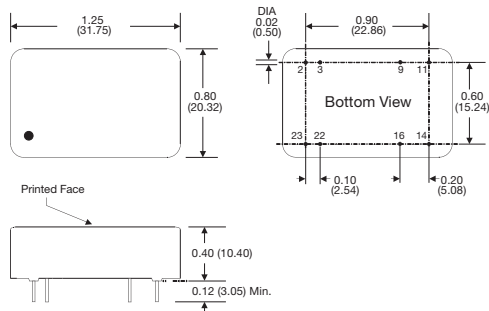

Pin	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
11	N.C.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

- All dimensions are in inches (mm)
- Weight: 0.04 lbs (17 g) approx.
- Pin diameter: 0.02 ±0.002 (0.5 ±0.005)
- Pin pitch tolerance: ±0.014 (±0.35)
- Case tolerance: ±0.02 (±0.5)

Input Filter

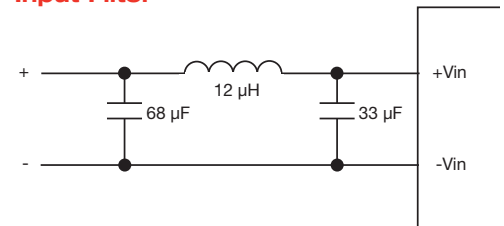

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [XP Power](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-](#)
[2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-](#)
[R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)