
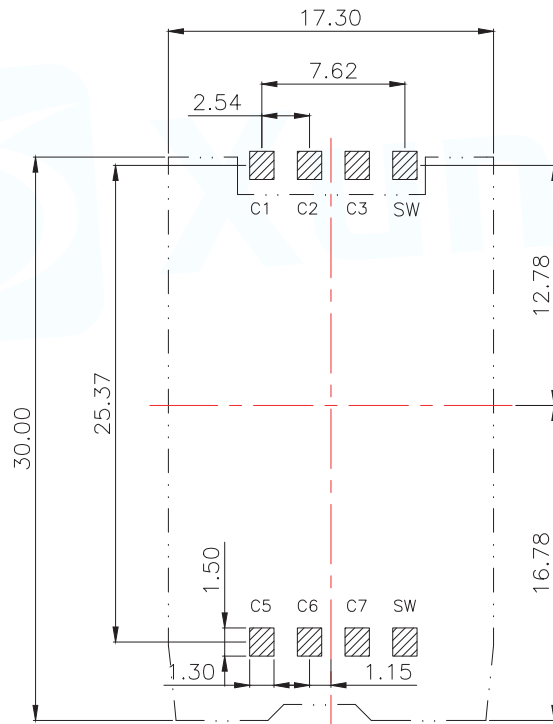


SECTION A-A

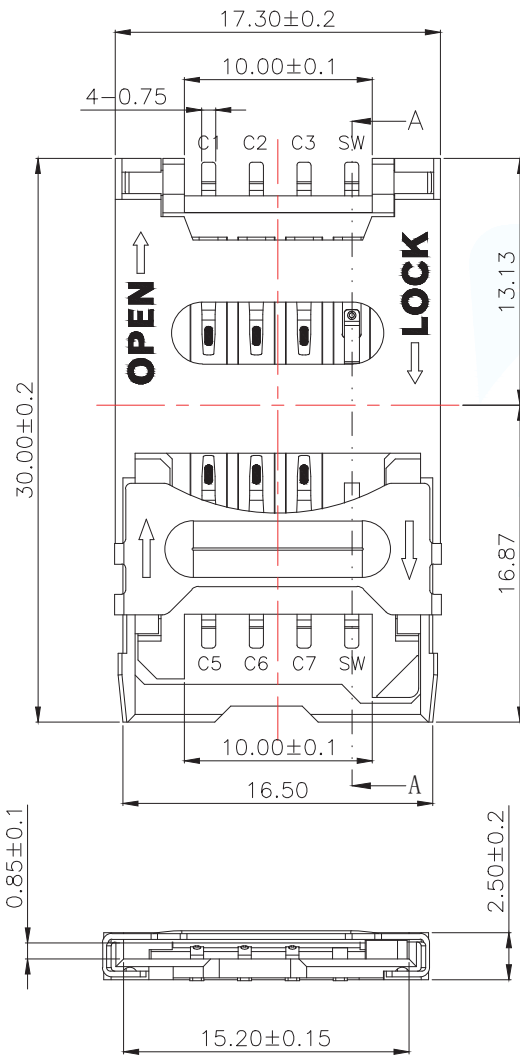

RECOMMENDED P.C.B LAYOUT  
COMPONENT SIDE(TOLERANCE ±0.05)

Specification/规格:

Material/物料规格:

Housing/塑胶主体:LCP UL94V-0

Contact Terminal/接触端子:Phosphor Bronze

Metallic Shell/金属外壳:Stainless Steel-SUS304

Plating/电镀规格:

Contact Terminal Plating/接触端子部分电镀

Contact Area:5μ" Gold

Soldering Area:100μ" Tin

Under-plating:50μ" Nickel above

Electrical/电气规格:

Voltage Rating/电压额定值:50 V max

Current Rating/电流额定值:1A max

Operating Temperature/工作温度:-40°C to +85°C

Contact Resistance/接触电阻值:

50 mΩ typical,100mΩ max  
Insulating Resistance/绝缘电阻值:1000 mΩ min.(Apply施加 500V DC)

Dielectric Withstanding Voltage/耐电压:500 VAC for 1 minute

Mechanical/机械性规格:

Durability/耐久性:min 5,000 cycles

|                                       |             |   |                            |
|---------------------------------------|-------------|---|----------------------------|
| MANUFACTURE DWG                       |             | 东莞市讯普电子科技有限公司<br>DongGuan XunPu Electronics Co.,Ltd |                            |
| UNLESS OTHERWISE SPECIFIED TOLERANCES |             |   | TITLE:<br>SIM大卡6+2PIN带检测功能 |
|                                       |             |   | PAR<br>SIM-105B-ARP8       |
| DECIMALS:                             | ANGLES:     |   | DWN                        |
| X.:±0.20                              | X':.±2'     |   | CHKD                       |
| .X:±0.15                              | .X':.±1'    | APVD  |                            |
| .XX:±0.10                             | .XX':.±0.5' | CUSTOMER COPY                                       | SCALE1:1 UNIT:MM           |
|                                       |             | SIZE:A4   | SHEET:1F1                  |
|                                       |             |   | REV:A                      |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Memory Card Connectors](#) category:*

*Click to view products by [XUNPU](#) manufacturer:*

Other Similar products are found below :

[6407-249V-25273P](#) [6407-249V-25343P](#) [6426-201-21343](#) [69.920.0553.0](#) [MCR60A-98D-2.54DSA\(70\)](#) [809180410000000](#) [DM3AT-SF-PEJM5\(41\)](#) [IC11S-BUR-PNEJL\(71\)](#) [C70210M0083692](#) [2041353-2](#) [308-DS1P0811-192](#) [HM2P09PDR360N9LF](#) [10014744-011TLF](#) [11327-001](#) [11327-002](#) [NX1-32T-KT3K\(05\)](#) [95622-003LF](#) [84648-056HLF](#) [CCM03-3109 B LFT](#) [MS3116J10-6PW](#) [2309923-1](#) [61126-050CAHLF](#) [GTFP08432B1HR](#) [G85D1160022HHR](#) [SCE2MSDZN76A121SN](#) [10014744-011ALF](#) [10014744-011LF](#) [10057542-1211FLF](#) [10067972-000LF](#) [10067972-050LF](#) [10122302-20110LF](#) [G85D1162022HHR](#) [TF-05A](#) [M6014-12](#) [XKNANO-1412](#) [SMN-304-ARP6](#) [MIS11-S1F1-2000-A](#) [SMN-308-ARSP7](#) [MCS-302S-KT1B](#) [SMN-308-ACSP7](#) [K-DYX-008](#) [K-DYX-004](#) [HYCW126-TF18-150B](#) [C7024-03](#) [SMO-1030](#) [MCS-110-KT](#) [SIM-217](#) [SNO-1355-KT](#) [SMO-1025-P10](#) [SIM-211S-P6](#)