
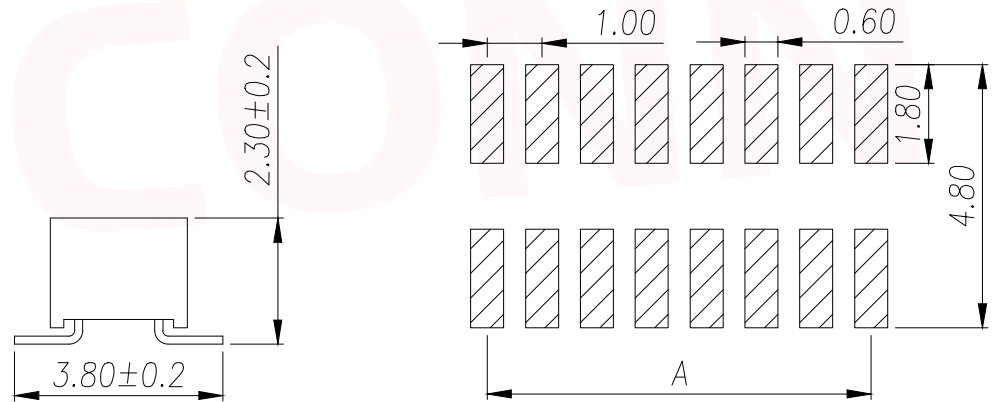


REV.	Q'TY	ECN. NO.	APR.	DATE

SPECIFICATIONS

Current Rating: 0.75 Amps  
 Withstanding Voltage: AC 500V  
 Insulation Resistance: 1000MΩ Min  
 Contact Resistance: 20mΩ Max  
 Operation Temperature: -40° to +105°  
 Insulator Material: Polyester (UL94V-0)  
 Contact Material: Phosphor bronze  
 Standard: PA6T  
 Contact Plating: Gold Flash  
 Max. Processing Temp: 240°C for 30-60 seconds  
 (260°C for 5 seconds)

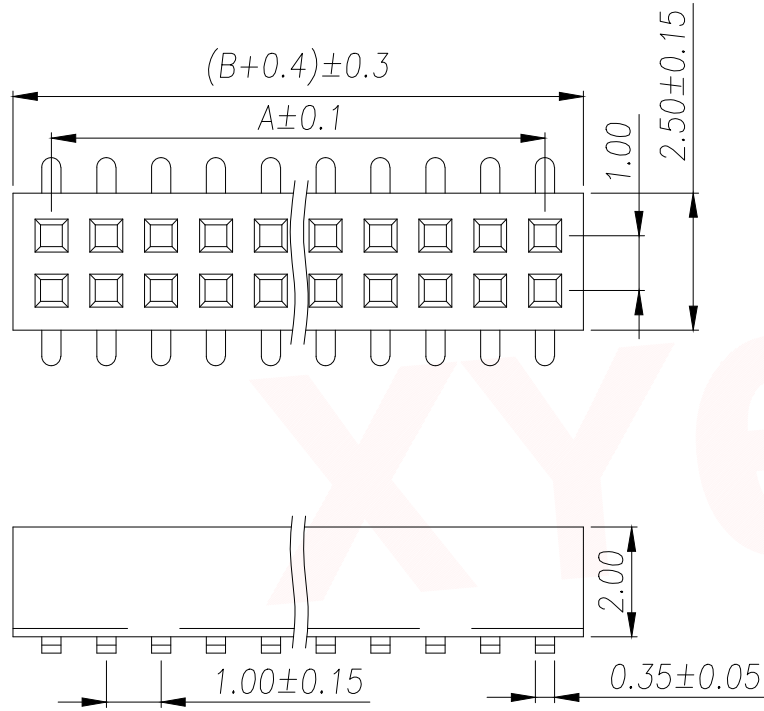

RECOMMEND P.C.B LAYOUT  
 PCB TOLERANCE: ±0.05 (TOP VIEW)

Part No	Pin	A	B	Part No	Pin	A	B	Part No	Pin	A	B	Part No	Pin	A	B
PM1.0-US2S-1A	1	0.00	1.00	PM1.0-US2S-11A	11	10.00	11.00	PM1.0-US2S-21A	21	20.00	21.00	PM1.0-US2S-31A	31	30.00	31.00
PM1.0-US2S-2A	2	1.00	2.00	PM1.0-US2S-12A	12	11.00	12.00	PM1.0-US2S-22A	22	21.00	22.00	PM1.0-US2S-32A	32	31.00	32.00
PM1.0-US2S-3A	3	2.00	3.00	PM1.0-US2S-13A	13	12.00	13.00	PM1.0-US2S-23A	23	22.00	23.00	PM1.0-US2S-33A	33	32.00	33.00
PM1.0-US2S-4A	4	3.00	4.00	PM1.0-US2S-14A	14	13.00	14.00	PM1.0-US2S-24A	24	23.00	24.00	PM1.0-US2S-34A	34	33.00	34.00
PM1.0-US2S-5A	5	4.00	5.00	PM1.0-US2S-15A	15	14.00	15.00	PM1.0-US2S-25A	25	24.00	25.00	PM1.0-US2S-35A	35	34.00	35.00
PM1.0-US2S-6A	6	5.00	6.00	PM1.0-US2S-16A	16	15.00	16.00	PM1.0-US2S-26A	26	25.00	26.00	PM1.0-US2S-36A	36	35.00	36.00
PM1.0-US2S-7A	7	6.00	7.00	PM1.0-US2S-17A	17	16.00	17.00	PM1.0-US2S-27A	27	26.00	27.00	PM1.0-US2S-37A	37	36.00	37.00
PM1.0-US2S-8A	8	7.00	8.00	PM1.0-US2S-18A	18	17.00	18.00	PM1.0-US2S-28A	28	27.00	28.00	PM1.0-US2S-38A	38	37.00	38.00
PM1.0-US2S-9A	9	8.00	9.00	PM1.0-US2S-19A	19	18.00	19.00	PM1.0-US2S-29A	29	28.00	29.00	PM1.0-US2S-39A	39	38.00	39.00
PM1.0-US2S-10A	10	9.00	10.00	PM1.0-US2S-20A	20	19.00	20.00	PM1.0-US2S-30A	30	29.00	30.00	PM1.0-US2S-40A	40	39.00	40.00

DIMENSION IN mm		厦门市辛译精密电子有限公司 Xiamen XinYi Xyconn Electronics Co.,Ltd		
TOLERANCE UNLESS OTHERWISE SPECIFIED				
.X±0.35	X.*± 5°	APR. Alex	TITLE: 1.0PM H2.0 2xNPin SMT W2.5 U <sub>#</sub> PC3.8 PB2.3 6T	
.XX±0.25	.X*± 3°	CHK. Jack	DWG NO. PM1.0-US2S-NA	
.XXX±0.15	.XX*± 1°	DRA. Can	PROJECT:  CUSTOMER DRAWING	
		SIZE A4	SCALE 1:1	SHEET 1/1
				REV. A

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XYECONN](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)