
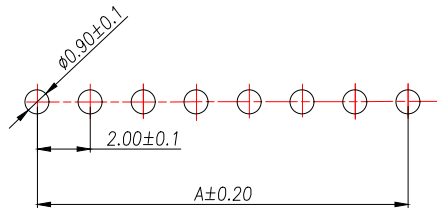
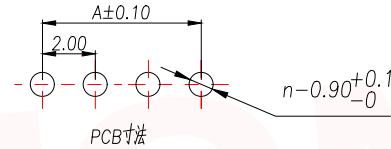

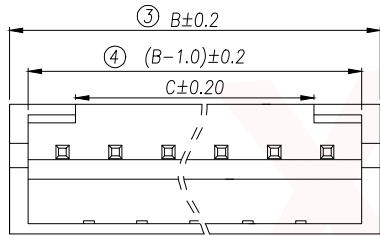
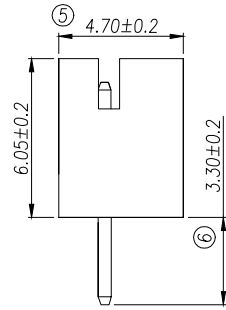


REV.	Q'TY	ECN. NO.	APR.	DATE

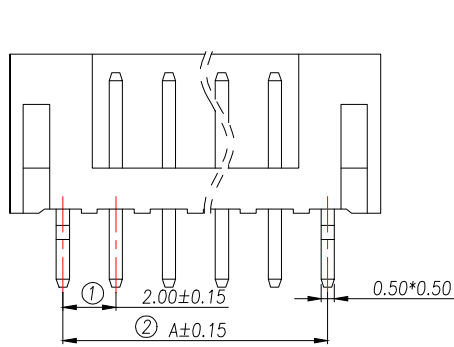

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

技术要求:

1. 塑件材料: PA66(UL-94V-0)
2. 接触件: 黄铜镀锡
3. 接触电阻: <10mΩ
4. 绝缘电阻: >100MΩ
5. 额定电压: 250V AC DC
6. 额定电流: 2.0A AC DC
7. 耐压: 能承受1000V AC/Minute
8. 工作温度: -25°~+85°
9. 可焊性试验: 浸锡面积>95%温度235°, 时间25±0.5秒
10. 铅和锡等六大有害物质含量要符合环保要求。

Part No	Pin	A	Y
XY-PH2.0-2A11-Y	2	2.00	6.00
XY-PH2.0-3A11-Y	3	4.00	8.00
XY-PH2.0-4A11-Y	4	6.00	10.00
XY-PH2.0-5A11-Y	5	8.00	12.00
XY-PH2.0-6A11-Y	6	10.00	14.00
XY-PH2.0-7A11-Y	7	12.00	16.00
XY-PH2.0-8A11-Y	8	14.00	18.00
XY-PH2.0-9A11-Y	9	16.00	20.00
XY-PH2.0-10A11-Y	10	18.00	22.00
XY-PH2.0-11A11-Y	11	20.00	24.00
XY-PH2.0-12A11-Y	12	22.00	26.00
XY-PH2.0-13A11-Y	13	24.00	28.00
XY-PH2.0-14A11-Y	14	26.00	30.00
XY-PH2.0-15A11-Y	15	28.00	32.00
XY-PH2.0-16A11-Y	16	30.00	34.00
XY-PH2.0-17A11-Y	17	32.00	36.00
XY-PH2.0-18A11-Y	18	34.00	38.00
XY-PH2.0-19A11-Y	19	36.00	40.00
XY-PH2.0-20A11-Y	20	38.00	42.00

DIMENSION IN mm		TOLERANCE UNLESS OTHERWISE SPECIFIED		厦门市辛译精密电子有限公司 Xiamen XinYi Xyecomm Electronics Co.,Ltd			
.X±0.35	X.*±5°	APR.	Alex	TITLE: WAFER PH2.0MM 直针(黄色)			
.XX±0.25	.X.*±3°	CHK.	Jack	DWG NO. XY-PH2.0-NP11-Y			
.XXX±0.15	.XX.*±1°	DRA.	Can	PROJ.	CUSTOMER DRAWING		
		SIZE A4	SCALE 1:1	SHEET 1/1	REV. A		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XYECONN](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)