



深圳市业展电子有限公司

# 承认书

## SPECIFICATION FOR APPROVAL

客户名称

Customer Name \_\_\_\_\_

客户料号

Customer P/N \_\_\_\_\_

产品名称

Product Name

Welding type sampling resistor – JSR Series

产品规格

Product Type

J5-10-20G

申请承认日期

Apply Date

2019-07-17

版本

REV. \_\_\_\_\_

供货商属性  代理商

制造商 深圳市业展电子有限公司

Vendor Type Agency

Manufacturer

Note: 禁止使用 1 级环境管理物质.遵守 ACBEL"环境管理物质规范"中所要求之含量标准.

Restrict use of hazardous substances of level 1; Comply with "Specification for Hazardous Substances and Materials Management" of ACBEL

供货商印鉴 Vendor Stamp	APPROVED	CHECKED	PREPARED	承认印鉴 Stamp
			邓小辉	

Mainland China: 深圳市业展电子有限公司

Shenzhen Yezhan Electronics Co., Ltd.

Add: 深圳市龙华区环观中路荣倡工业园 7 栋 4 楼

Tel: 0755-26517682 /18926048203

Fax: 0755-83918284

E-mail: caixiaojuan@yezhan.com.cn

标准书名 Classification 承认书 Specification	Spec No.	YZ. JSR
品名：焊接型采样电阻器 JSR Series Product Name: Welding type sampling resistor	Version	1.5
	Page	4-1

1. 一般事项 General

1.1 适用范围 Scope

本承认书适用于深圳市业展电子有限公司 制造之[焊接型采样电阻器]。  
This specification is available for Welding type sampling resistor manufactured by Shenzhen Yezhan Electronics Co., Ltd.

1.2 品质 Quality


本电阻器的制造系经高质量管理程序，并具有高信赖性的质量保证，且符合 RoHS 和无卤要求。  
The resistor is manufactured by highly quality-controlled process and guaranteed high reliability, it meets RoHS & Halogen-Free requirement.

1.3 标准试验状态 Standard measuring conditions

温度  $20 \pm 2^\circ\text{C}$ 、湿度  $65 \pm 5\%$ 。  
但在温度  $5 \sim 35^\circ\text{C}$ 、湿度  $45 \sim 85\%$  之情况下，仍可给予判定。  
Temperature  $20 \pm 2^\circ\text{C}$ , Humidity  $65 \pm 5\%$ .  
Being no doubt about the judgment, measurements can be made within the following Temperature  $5 \sim 35^\circ\text{C}$ , Humidity  $45 \sim 85\%$ .

1.4 形名 (例) Type designation (example)

依使用种类、线径、脚距、形状、公称电阻值、电阻值容许差而区别，其构造如下：  
The type designation shall be in the following form and as specified.

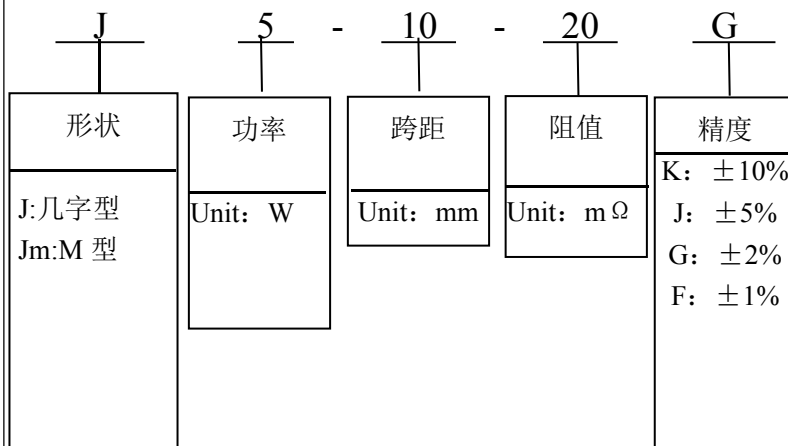


标准书名 Classification 承认书 Specification	Spec No.	YZ. JSR
品名：焊接型采样电阻器 JSR Series Product Name: Welding type sampling resistor	Version	1.5
	Page	4-2


### 1.5 材质 Material

代号 Symbol	材料 Material	成分 Components	电阻率 Resistance rate
1	康铜 Constantan wire	Cu 57-59%, Ni 40-42%, Mn 1%	48 $\mu\Omega \cdot \text{cm}$
6	铜镍22 Copper-Nickel wire	Cu 77%, Ni 23%	30 $\mu\Omega \cdot \text{cm}$
n	镍铬2080 Nickel chromium	Ni80%, Cr20%	110 $\mu\Omega \cdot \text{cm}$

### 1.6 功率曲线 Power Derating

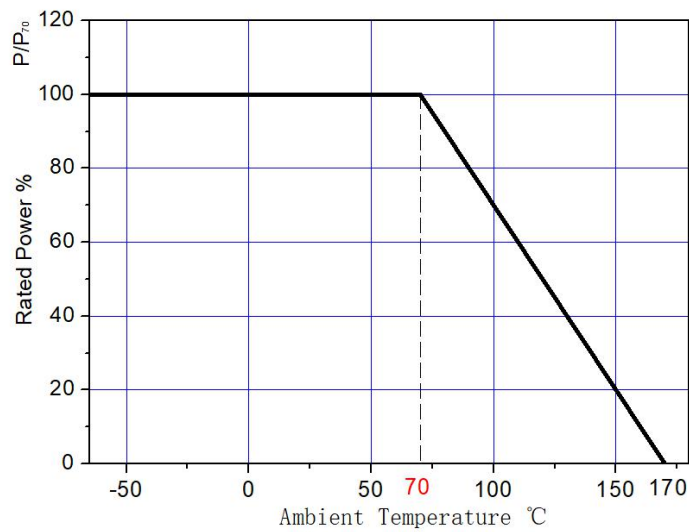

### 1.7 温度系数曲线 TCR Derating

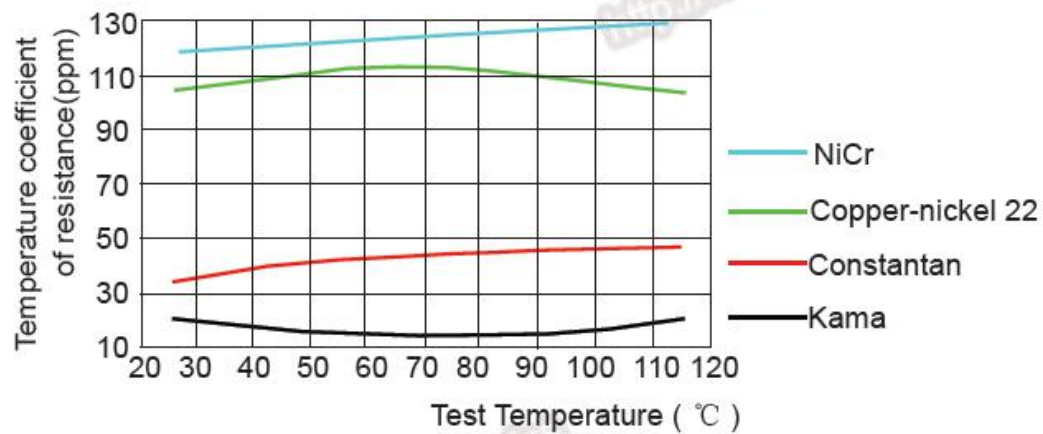

标准书名 Classification 承认书 Specification	Spec No.	YZ. JSR
品 名 : 焊接型采样电阻器 JSR Series Product Name: Welding type sampling resistor	Version	1.5
	Page	4-3

1.8 外形 External

项 目	参 数
材 料	镍铬扁线 n-0.5*3.3
图 解	
D (焊脚)	4.5mm ± 0.5mm
H (标高)	11mm ± 2mm
W (跨距)	10mm ± 0.5mm
F (线宽)	3.3mm ± 0.2mm
扁线厚	0.5mm ± 0.1mm
E (引脚线径)	0.8mm ± 0.1mm
阻 值	20mΩ ± 2%
额定功率	5W
使用温度	-65℃ ~ 170℃

标准书名 Classification 承认书 Specification		Spec No.	YZ. JSR
品名 : 焊接型采样电阻器 JSR Series		Version	1.5
Product Name: Welding type sampling resistor		Page	4-4
项目 Item	规格值 Performance	试验方法 Test methods	
短时间过负荷 Short time overload	±1%以内。 不得有机械损伤。 within ±1% No evidence of mechanical damage.	额定功率 X 5 倍 , 5 秒。 Rated power X 5 times, 5s	
端子强度 Terminal strength	不得有机械损伤。 No evidence of mechanical damage.	线径 1.0mm 以上 5kg/10sec. 线径 0.8mm 以下 2kg/10sec. Wire dimension over 1.0mm 5kg/10sec. Wire dimension below 0.8mm 2kg/10sec.	
焊锡耐热性 Resistance to soldering heat	±0.5%以内。 不得有机械的损伤。 within ±0.5% No evidence of mechanical damage.	350±10℃, 3.5±0.5 秒 , 试验后放置 3 小时。 350±10℃, 3.5±0.5s After test leave for 3h.	
焊锡附着性 Solderability	导线至少 95%以上新锡覆盖。 Covered with new solder by 95% at least.	焊锡温度: 245±5℃。 浸锡时间: 3±0.5 秒。 Test temperature of solder: 245±5℃ Dipping time in solder: 3±0.5s	
温度循环 Temperature cycle	±1%以内。 不得有机械的损伤。 within ±1% No evidence of mechanical damage.	低温侧 -40±3℃/30 分, 室温 10~15 分钟 高温侧 200±2℃/30 分, 室温 10~15 分钟 5 回 Low side : -40±3℃/30min, Room temp.: 10 to 15min High side : 200±2℃/30min, Room temp.: 10 to 15min 5 cycles	
耐湿负荷寿命 Load life in humidity	±0.5%以内。 within ±0.5%	40±2℃, 湿度 90~95%, 1000 小时 定格电压(90 分钟 ON, 30 分钟 OFF) 40±2℃, 90 to 95%RH, 1000h Rated voltage (90 min ON, 30 min OFF)	
负荷寿命 Load life	±1%以内。 within ±1%	70±2℃, 1000 小时 定格电压(90 分钟 ON, 30 分钟 OFF) 70±2℃, 1000h Rated voltage (90 min ON, 30 min OFF)	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Current Sense Resistors - Through Hole](#) category:*

*Click to view products by [Yezhan](#) manufacturer:*

Other Similar products are found below :

[SR10-0.015-1%](#) [SR20-0.008-1%](#) [HPCR0402F12K0K9](#) [HPCR0402F130RK9](#) [HPCR0402F13K0K9](#) [HPCR0402F17K4K9](#)

[HPCR0402F180KK9](#) [HPCR0402F180RK9](#) [HPCR0402F1K10K9](#) [HPCR0402F220KK9](#) [HPCR0402F220RK9](#) [HPCR0402F24K0K9](#)

[HPCR0402F27K0K9](#) [HPCR0402F2K00K9](#) [HPCR0402F33K0K9](#) [HPCR0402F430KK9](#) [HPCR0402F4K30K9](#) [HPCR0402F680KK9](#)

[HPCR0402F680RK9](#) [HPCR0402F390KK9](#) [HPCR0402F39K0K9](#) [HPCR0402F8K20K9](#) [HPCR0402F560RK9](#) [HPCR0402F2K70K9](#)

[HPCR0402F360KK9](#) [HPCR0402F36K0K9](#) [HPCR0402F3K00K9](#) [HPCR0402F3K90K9](#) [HPCR0402F430RK9](#) [HPCR0402F43K0K9](#)

[HPCR0402F475KK9](#) [HPCR0402F47K0K9](#) [HPCR0402F51K0K9](#) [HPCR0402F560KK9](#) [HPCR0402F56K0K9](#) [HPCR0402F5K10K9](#)

[HPCR0402F5K60K9](#) [HPCR0402F620KK9](#) [HPCR0402F620RK9](#) [HPCR0402F68K0K9](#) [HPCR0402F6K20K9](#) [HPCR0402F6K80K9](#)

[HPCR0402F750KK9](#) [HPCR0402F750RK9](#) [HPCR0402F7K50K9](#) [HPCR0402F820KK9](#) [HPCR0402F82K0K9](#) [HPCR0402F910KK9](#)

[HPCR0402F910RK9](#) [HPCR0402F91K0K9](#)