

ESDULC5V0F1

Features

- DFN1006-3L package
- Response time is typically < 1ns
- Ultra-low leakage current
- Low operating voltage: 5V
- Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 20\text{kV}$
 - Contact discharge: $\pm 15\text{kV}$


Description

The ESDULC5V0F1 is an ultra-low capacitance TVS (Transient Voltage Suppressor) array designed to protect high speed data interfaces. It has been specifically designed to protect sensitive electronic components which are connected to data and transmission lines from over-stress caused by ESD.

Applications

- USB2.0 Power and Data Line Protection
- Digital camera
- PDA
- Other electronics equipments

Circuit Diagram



Absolute Maximum Ratings

Tamb=25°C unless otherwise specified





Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μ s)	P _{PK}	70	W
Maximum Reverse Peak Pulse Current (8/20 μ s)	I _{PP}	4	A
ESD per IEC 61000-4-2 (Air)	V _{ESD}	± 20	KV
ESD per IEC 61000-4-2 (Contact)		± 15	
Storage Temperature Range	T _{STJ}	-55 to +150	°C
Operating Temperature Range	T _J	-55 to +125	°C

Electrical Characteristics


TA=25°C unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V _{RWM}	Reverse Working Peak Voltage	-			5.0	V
V _{BR}	Reverse Breakdown Voltage	I _T = 1mA	6.0	7.5	9	V
I _R	Reverse Current	V _{RWM} = 5V			0.1	μ A
V _{C1}	Clamping Voltage	I _{PP} =1A, t _P =8/20 μ s			9	V
V _{C2}	Clamping Voltage	I _{PP} =4A, t _P =8/20 μ s			14	V
C _J	Diode Capacitance	VR = 0V, f = 1MHz Pin1or2 to Pin3		0.5	0.65	pF
		VR = 0V, f = 1MHz Pin1 to Pin2		0.25	0.40	


Characteristic Curves

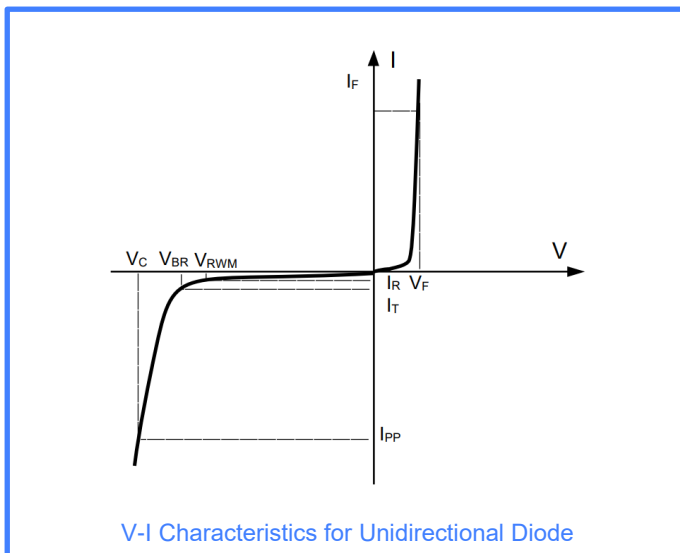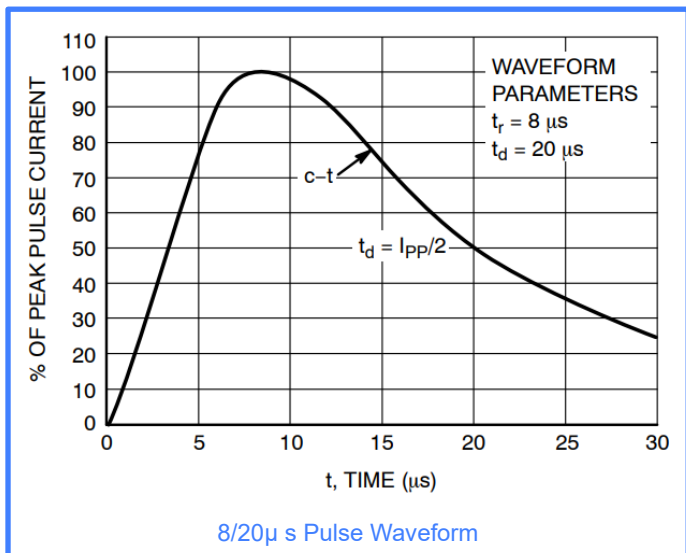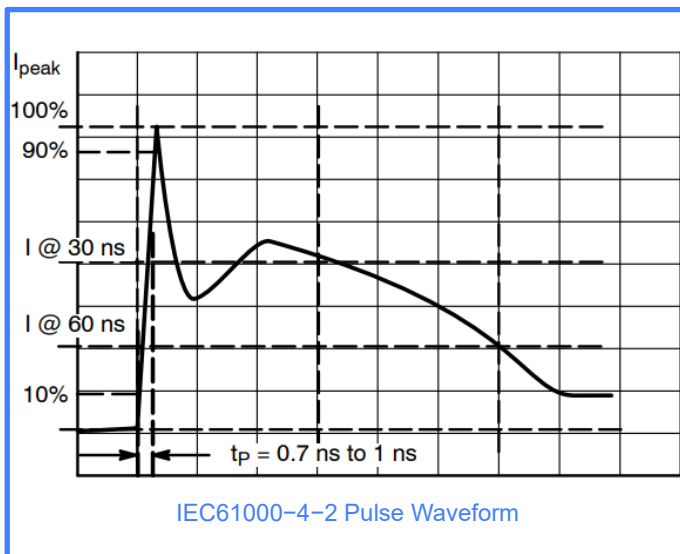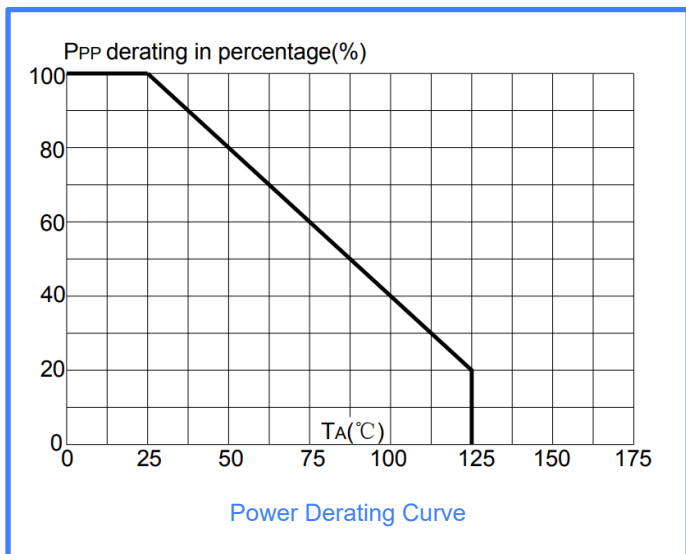

DFN1006-2 Package Outline & Dimensions

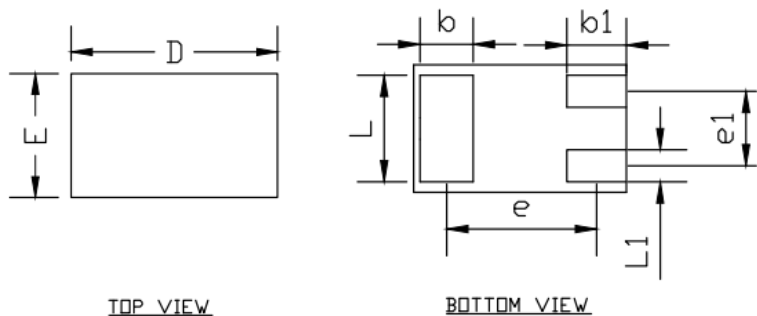

SYM	DIMENSIONS		
	MILLIMETERS		
	MIN	NOM	MAX
A	0.40	-	0.50
A1	0.00	-	0.05
A3	0.127REF		
D	0.95	1.00	1.05
E	0.55	0.60	0.65
b	0.20	0.25	0.30
b1	0.20	0.30	0.40
L	0.45	0.50	0.55
L1	0.10	0.15	0.20
e	0.675		
e1	0.35		

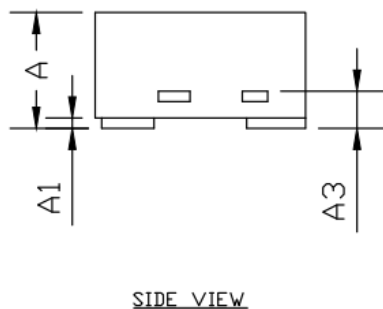

Disclaimer

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Yint](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)
[ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [CEN955](#) [W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)