


1、 Physical Dimensions(size of 1206)

Unit:mm

Part Number	A		B		C		D	Marking
	Min	Max	Min	Max	Min	Max	Min	
K1206L035/16YR	3.00	3.40	1.40	1.80	0.60	1.00	0.25	T04

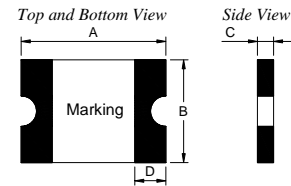

2、 Electrical Characteristics

Part Number	I_H (A)	I_T (A)	V_{max} (V)	I_{max} (A)	T_{trip} (Max time to trip)		Pd_{typ} (W)	R_{min} (Ω)	$R1_{max}$ (Ω)
					Current(A)	Time(S)			
K1206L035/16YR	0.35	0.75	16	40	8.00	0.10	0.60	0.300	1.200

I_H : Holding Current: maximum current at which the device will not trip in 25°C still air.

I_T : Tripping Current minimum current at which the device will trip in 25°C still air.

V_{max} : Maximum voltage device can withstand without damage at rated current.

I_{max} : Maximum fault current device can withstand without damage at rated voltage.

T_{trip} : Maximum time to trip(s) at assigned current.

Pd_{typ} : Rated working power.

R_{min} : Minimum resistance of device prior to trip at 25°C.



$R1_{max}$: Maximum resistance of device is measured one hours post reflow at 25°C.

Noted: All electrical function test is conducted after PCB mounted.

3、 Thermal Derating

K1206L035/16YR	Maximum ambient operating temperature								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
Hold Current(A)	0.51	0.46	0.40	0.35	0.30	0.27	0.24	0.22	0.18
Trip Current(A)	1.09	0.99	0.86	0.75	0.64	0.58	0.51	0.47	0.39

4、 Solder Reflow Recommendations

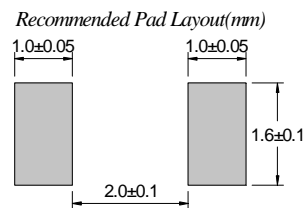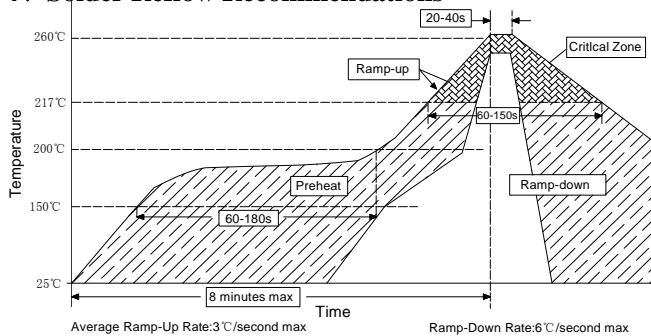

Notes: If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

5、 Package Information

Packing quantity: 4000PCS/Reel

Note: Reel packaging per EIA-481-1 standard

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resettable Fuses - PPTC category](#):

Click to view products by [Yongyutai Electronics manufacturer](#):

Other Similar products are found below :

[RF0077-000](#) [RF0627-000](#) [RF3301-000](#) [RF3382-000](#) [SMD125-2](#) [RF1973-000](#) [RF2531-000](#) [RF2873-000](#) [RF3060-000](#) [TR600-150Q-B-0.5-0.130](#) [RXE090](#) [5E4795/04-1502](#) [TRF250-080T-B-1.0-0.125](#) [SMD100-2](#) [NIS5431MT1TXG](#) [SMD250-2](#) [RS30-090](#) [RS30-600](#) [RS30-800](#) [RS30-900](#) [RS60RB-160](#) [RS60SB-250](#) [SB250-145](#) [OZCH0110AF2E](#) [0603L001/60YR](#) [0603L003/36YR](#) [BK250-120-SZ-E0.6](#) [BK60-010-DI-E0.5](#) [BK250-040-DY-E0.6](#) [RF2631-000](#) [NIS5420MT2TXG](#) [NIS5420MT3TXG](#) [NIS6420MT1TWG](#) [RF5032-000](#) [RF5051-000](#) [RF5034-000](#) [RF5105-000](#) [RF5062-000](#) [RF5055-000](#) [RF5052-000](#) [2920L075/72MR](#) [BSMD0603-025-24V](#) [BSMD0402L-005](#) [BSMD0603-010-9V](#) [BSMD1812-020-60V](#) [BSMD2920-400-30V](#) [BSMD0603-010-12V](#) [BSMD0805-035-30V](#) [BSMD1210-150-16V](#) [BSMD0805-003-60V](#)