

# Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色:黑色.  
 Housing:PA9T+30%G.F UL94V-0, Color:Black  
 四方针: 黄铜, 镍底30u", 表面镀金0.8u"  
 Contact:Brass,0.8u"GOLD PLATING OVER ALL  
 30u" NICKEL UNDERPLATING OVER ALL



2. 特性 (characteristics):

额定电流: 3 AMP  
 Raring Current:3 AMP.  
 接触阻抗: 20 mΩ MAX.  
 Contact Resistance:20 mΩ MAX.  
 绝缘阻抗: 1000 MΩ MIN.  
 Insulating Resistance:1000 MΩ MIN.  
 耐电压: AC 500V/分钟.  
 Withstanding Voltage:AC 500V/Minute.  
 温度范围: -40° C to+105° C  
 Temperture Range: -40° C to+105° C

# Ordering Information

P1XX-11 XX XX X S XXX X 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating Full of Gold	Serial-gold	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15: 1.5mm	1-40P	A0=0.8u"	B0=0.8U'	A: PET	TERMINAL	A: PE Bag
17: 1.7mm		A1=1u"	B1=1U'	B: PA6T		C Tube
20: 2.0mm		A2=1.5u"	B2=1.5U'	C: PA9T		D Tube+CAP
25: 2.54mm		A3=2u"	B3=2U'	D: LCP		E: Tray
		A4=3u"	B4=3U'			
		A5=5u"	B5=5U'			
		A6=10u"	B6=10U'			
		A7=15u"	B7=15U'			
		A8=20u"	B8=20U'			
		A9=30u"	B9=30U'			
		S1=Quinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

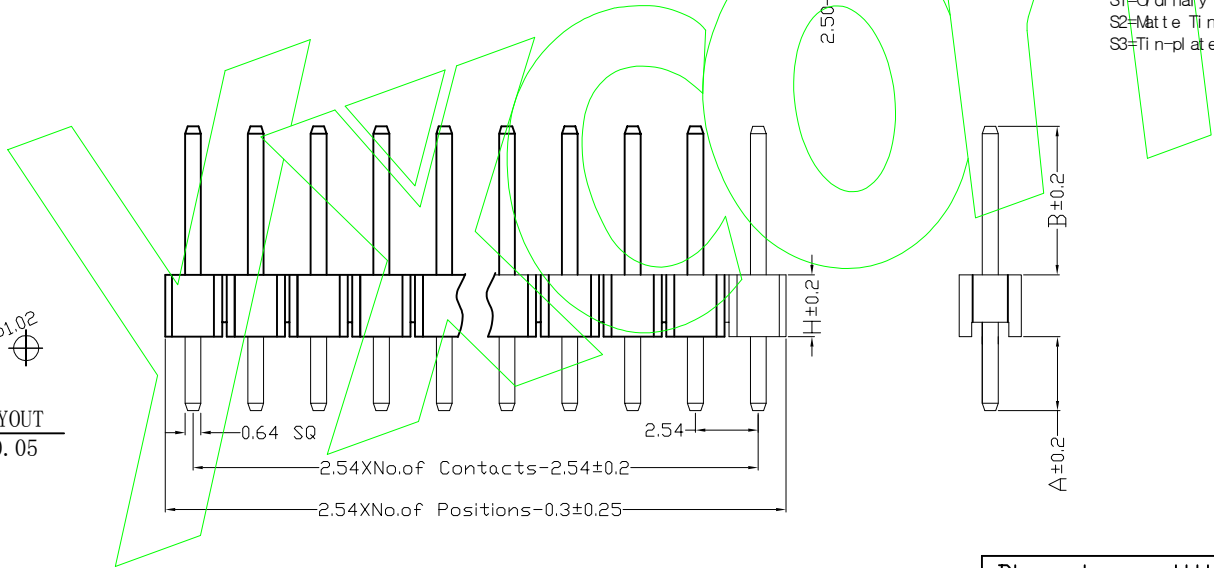

ITEM	A	B	H		C
Standard	3.0	6.0	1.5	1.7	2.0 2.54
Alternate					

REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	OPERATION	SCALE	Fit	东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.					
				X.X ±0.25	UNIT	MM	SIZE	A4	DESIGN	周芳杰 2021.6.18	PART NO	P1XX-11XXXXXXSXXX1
				X.XX ±0.20	SHEET	1/1	CHECK				TITLE	2.54间距 单排针 单塑 180度
				X.XXX ±0.10	PROJ.		APPROVE				Customer No.	
				Angle ±3°								
				DIM TOL								

由 Autodesk 教育版产品制作

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Yxcon](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)