

AZ970(E)/AZ971(E)

AUTOMOTIVE 40 AMP MINIATURE POWER RELAY

FEATURES

- Low cost
- Up to 40 Amp switching capability in a compact size
- Open, covered or sealed
- Coil voltages up to 24 VDC
- Small footprint, available in 2 versions
- 1 Form A and 1 Form C contacts available
- Vibration and shock resistant
- Designed for high in-rush applications



CONTACTS

| | |
|---------------------------|---|
| Arrangement | SPST (1 Form A), SPDT (1 Form C) |
| Ratings (max.) | (resistive load) |
| switched power | 560 W (1 Form A), 420 W (1 Form C) |
| switched current | 40 A (1 Form A), 30 A (1 Form C) |
| switched voltage | 150 VDC* |
| | * Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory. |
| Contact material | Silver tin oxide |
| Initial resistance | < 100 mΩ (1 A / 24 V voltage drop method) |

COIL

| | |
|------------------------------------|------------------------------|
| Nominal coil DC voltages | 9, 12, 24 |
| Dropout | > 6% of nominal coil voltage |
| Power at pickup voltage | (typ.) |
| 9 VDC coil | 520 mW |
| 12 VDC and 24 VDC coil | 514 mW |
| Max. continuous dissipation | (at 20°C (68°F) ambient) |
| open version | 5.3 W |
| covered version | 4.6 W |
| Temperature Rise | (at nominal coil voltage) |
| open version | 56 K (101°F) |
| covered version | 59 K (106°F) |
| Max. temperature | 155°C (311°F) |

COIL VOLTAGE SPECIFICATIONS

| Nominal Coil VDC | Must Operate VDC | Max. Continuous VDC | | Resistance Ohm ± 10% |
|------------------|------------------|---------------------|-----------------|----------------------|
| | | Open version | Covered version | |
| 9 | 5.1 | 15.9 | 15.2 | 50 |
| 12 | 6.8 | 21.3 | 20.4 | 90 |
| 24 | 13.9 | 42.7 | 41.0 | 362 |

GENERAL DATA

| | |
|------------------------------|---|
| Life Expectancy | (minimum operations) |
| Mechanical | 1 x 10 ⁶ |
| Electrical | 1 x 10 ⁵ at 40 A, 14 VDC, resistive |
| Operate Time | 5 ms (typ.) at nominal coil voltage |
| Release Time | 3 ms (typ.) at nominal coil voltage, without coil suppression |
| Dielectric Strength | (at sea level for 1 min.) |
| | 500 VDC coil to contact |
| | 500 VDC between open contacts |
| Insulation Resistance | 100 MΩ (min.) at 20°C, 500 VDC, 50% RH |
| Temperature Range | (at nominal coil voltage) |
| Operating | -40°C (-40°F) to 105°C (221°F) |
| Vibration resistance | 1.5 mm (0.062") DA at 10–55 Hz |
| Shock | 10 g |
| Enclosure | P.B.T. polyester |
| Terminals | Tinned copper alloy, P. C. |
| Soldering | |
| Max. Temperature | 270°C (518°F) |
| Max. Time | 5 seconds |
| Cleaning | |
| Max. Solvent Temp. | 80°C (176°F) |
| Max. Immersion Time | 30 seconds |
| Weight | 20 grams |

ZETTLER electronics GmbH

- A ZETTLER GROUP Company

Junkersstr. 3, D-82178 Puchheim, Germany


phone: +49 89 800 97-0
fax: +49 89 800 97-200

office@ZETTLERelectronics.com
www.ZETTLERelectronics.com

page 1 of 2 2019-04-09

AZ970(E) / AZ971(E)

ORDERING DATA

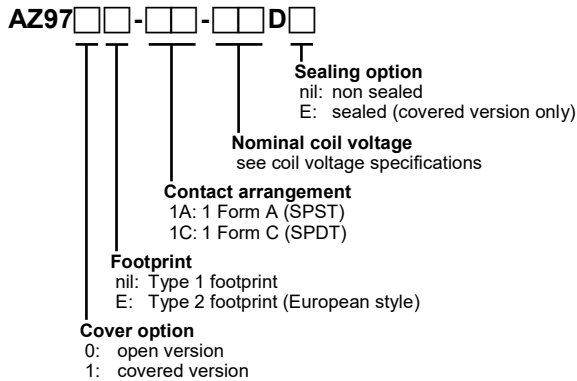


Example ordering data

| | |
|---------------|--|
| AZ970-1A-9D | Open version, Type 1 footprint, 1 Form A, 9 VDC nominal coil voltage |
| AZ971E-1A-12D | Covered version, Type 2 footprint, 1 Form A, 12 VDC nominal coil voltage, non sealed |


MECHANICAL DATA

Dimensions in inches with metric equivalents in parentheses.
Tolerance: ± .01" unless otherwise noted

Open version

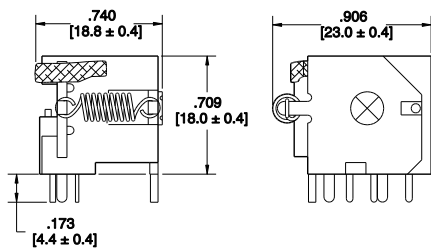


Covered version

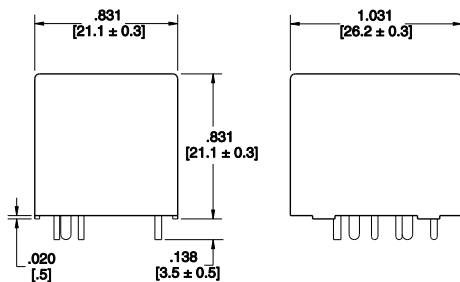

WIRING DIAGRAMS

Viewed towards terminals

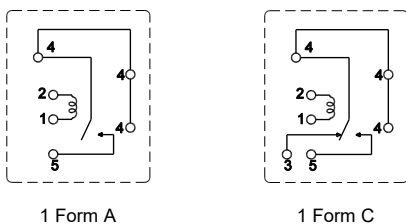


PC BOARD LAYOUT

Dimensions in inches with metric equivalents in parentheses.


Tolerance: ± .01" unless otherwise noted

Viewed towards terminals

Type 1 footprint




open version (AZ970)




covered version (AZ971)

Type 2 footprint



open version (AZ970E)



covered version (AZ971E)

NOTES

1. Specifications subject to change without notice.
2. All values at 20°C (68°F) unless otherwise stated.
3. Relay may pull in with less than "Must Operate" value.
4. Coil suppression circuits such as diodes, etc. in parallel to the coil will lengthen the release time.

DISCLAIMER

This product specification is to be used in conjunction with the application notes which can be downloaded from www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf

The specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Relays](#) category:

Click to view products by [Zettler](#) manufacturer:

Other Similar products are found below :

[7-1414968-8](#) [7-1617345-6](#) [9-1617516-5](#) [1393204-2](#) [1393302-3](#) [13Z99A115-0074](#) [1432872-1](#) [AR4-15F11-S01](#) [AR4-15H11](#) [1617057-2](#)
[1617518-5](#) [2-1617057-2](#) [2-1617057-6](#) [CB1F-M-12V-H15](#) [898H-1AH-D-001-12VDC](#) [AR4-11F11](#) [AR4-15F11](#) [AR4-41F11](#) [41FZ-200ACG-](#)
[BSL](#) [5-1616920-2](#) [5407-0011-HS](#) [CB1AF-M-12V-H59](#) [5-1617346-8](#) [1-1617059-9](#) [V23134A1052X299](#) [6-1393298-2](#) [6-1393302-1](#) [CP112J](#)
[897H-1AH-D-R1-U01-12VDC](#) [871-1A-S-12VDC](#) [5436-0001-HS](#) [V23086-R1851-A502](#) [V23136-A0004-X075](#) [V23134M0052G242](#) [1393204-](#)
[1](#) [23234B0001X001-EV-144](#) [AZ979-1A-24D](#) [V23134B0052C642](#) [V23234-A1001-X036](#) [V23234C0001X006](#) [V23134A 53C643](#)
[V23134J0065X497](#) [V23134J2053X194](#) [VF4A-45H11](#) [VF7-11F11-S01](#) [LD-12P](#) [FBR56ND12-W1](#) [FBR572ND24-W](#) [LQ-12S](#) [S11-1A-C1-](#)
[12VDC](#)