

ORDERING CODE

Example:

ZP=Zettler standard series

AP=Customized series

HP=High Performance series

DP=DC-DC

Output Power (W)

03=3W

20=20W

Output Type

S=Single Output

D=Dual Output

T=Triple Output

First Output Voltage

05=5V, 12=12V

Second Output Voltage

06=6V, 12=12V

00= No Second Output

Input AC Voltage Range

W=Wide Voltage Input


H=High Voltage Input ($\geq 165\text{VAC}$)

L=Low Voltage Input ($< 165\text{VAC}$)

Case Dimension

A: A Type case

B: B Type case...

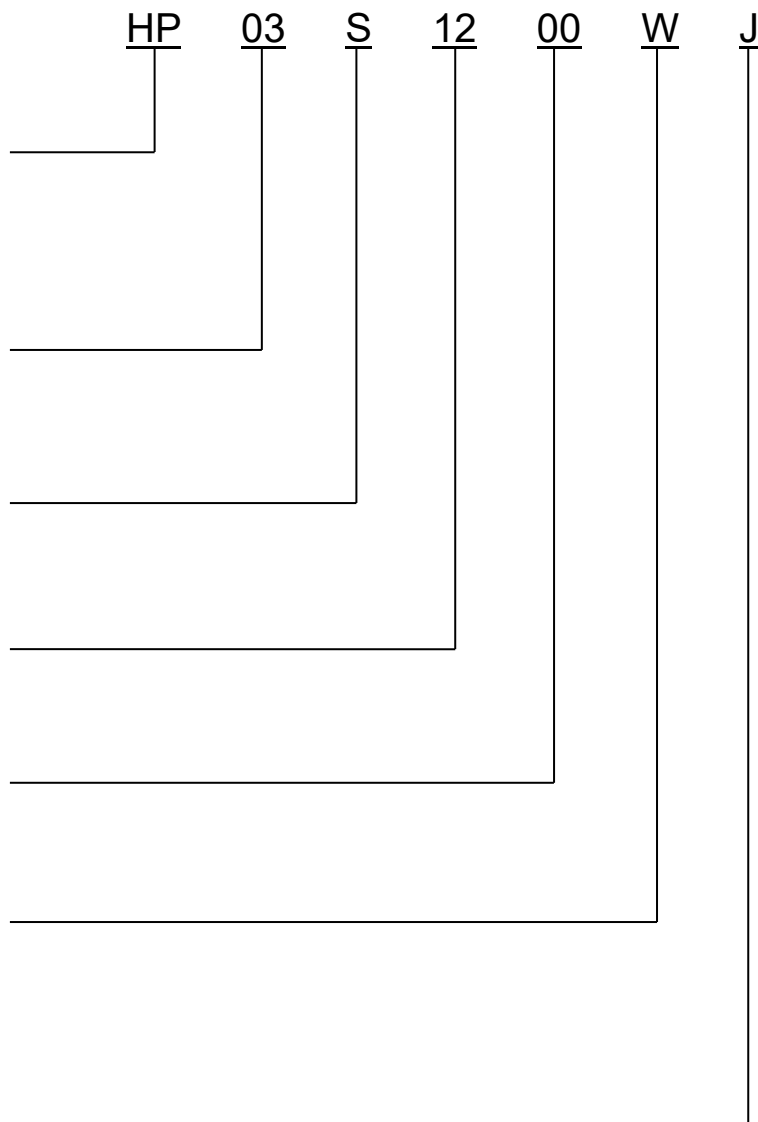

FEATURES

- PCB mounted switching Power module
- AC input voltage range: 85VAC~305VAC
- DC input voltage range: 100VDC~430VDC
- Ambient temperature range: -25°C~85°C
- Storage temperature range: -40°C~105°C
- Leakage current (Input :305VAC):<0.25mA
- Isolation voltage: Input –Output≥3600VAC 60S
- Insulation Resistance: Input –Output 500VDC≥100M Ohms
- MTBF: 1000Khrs Min MIL-HDBK-217F (25°C)
- Compact size, easy installation
- High efficiency low standby power consumption<0.15W, Environment-friendly
- Built-in output over current protection, over-voltage protection, short circuit protection
- Built-in EMI filter components, comply with the EN55032 class B standard
- Class II Construction

APPLICATIONS

This series could be widely applied in the LED, light control, Instrument, smart home and other home appliances.

NOTE: Contact Zettler for information on halogen free options



MODEL LIST

Model No.	Output Power	DC Voltage	Rated Current	Efficiency 230VAC, % Typ.	Ripple&Noise (max)	Ambient TEMP(°C)	Weight	Certificate			
								UL	TUV	CE	CB
HP03S0500WJ	3W	5Vdc	600mA	72%	100mVp-p	85	23.8g	●	●	●	●
HP03S0600WJ	3W	6Vdc	500mA	72%	100mVp-p	85	23.8g	●	●	●	●
HP03S0700WJ	3W	7.5Vdc	400mA	74%	100mVp-p	85	23.8g	●	●	●	●
HP03S0800WJ	3W	8Vdc	375mA	74%	100mVp-p	85	23.8g	●	●	●	●
HP03S0900WJ	3W	9Vdc	333mA	74%	100mVp-p	85	23.8g	●	●	●	●
HP03S1000WJ	3W	10Vdc	300mA	76%	150mVp-p	85	23.8g	●	●	●	●
HP03S1200WJ	3W	12Vdc	250mA	76%	150mVp-p	85	23.8g	●	●	●	●
HP03S1500WJ	3W	15Vdc	200mA	77%	200mVp-p	85	23.8g	●	●	●	●
HP03S1800WJ	3W	18Vdc	166mA	78%	250mVp-p	85	23.8g	●	●	●	●
HP03S2400WJ	3W	24Vdc	125mA	78%	250mVp-p	85	23.8g	●	●	●	●


ELECTRICAL SPECIFICATION

Model No.		HP03SXX00WJ		
Input	Rated Voltage	100~277VAC		
	Voltage Range	85~305VAC or 100~430VDC		
	Frequency (Hz)	47-63 Hz		
	Current (Full load)	115VAC	230VAC	277VAC
		70mA	40mA	35mA
	Inrush Current (<500us)	10A	20A	
	No Load Loss	0.15W Max@230VAC		
HOT PLUG	Unavailable			
Output	Voltage (V)	Refer to "Model List"		
	Current (mA) max.	Refer to "Model List"		
	Voltage Accuracy	(5V±5%) ±3%		
	Line Regulation	±0.5%		
	Load Regulation	±0.5%		
	Minimum Load (mA)	0		
	Ripple & Noise	Refer to "Model List"		
	Efficiency (typ.)	Refer to "Model List"		
	Set-up Time	≤50ms/230Vac, ≤30ms/115Vac		
	Hold up Time	>40ms/230VAC, 12ms/115VAC		
Protection	Over Current Protection	≥120%Io Self-recovery		
	Short Circuit Protection	Hiccup ,continuous ,short capable, self-recovery		
Environment	Operating Temperature	-25°C...+85°C @Free air convection		
	Operating Humidity	10-90% RH		
	Storage Temperature	-40°C...+105°C		
	Storage Humidity	5-95% RH		
	Temperature Coefficient	±0.03%/°C (0~85°C)		
Physical	Case Material	Plastic (UL 94V-0 rated)		
	Weight	23.8g (ref.)		
Safety & EMC	Dielectric Strength	I/P-O/P : 3600VAC		
	Safety Standards	Compliance With UL/EN62368-1 ,EN61558-2-16		
	EMI	Compliance With EN55032, CLASS B EN61000-3-2, EN61000-3-3		
	EMS (Noise Immunity)	Compliance With EN55035	Need to add external EMC component (Refer to the Schematic)	
Reliability Requirement	MTBF	1000Khrs Min MIL-HDBK-217F (25°C)		
	Burn-In Test	The unit shall be burned in for 2~4 hours under 264Vac input and DC with full load at normal temperature		

PRODUCT CHARACTERISTIC CURVE

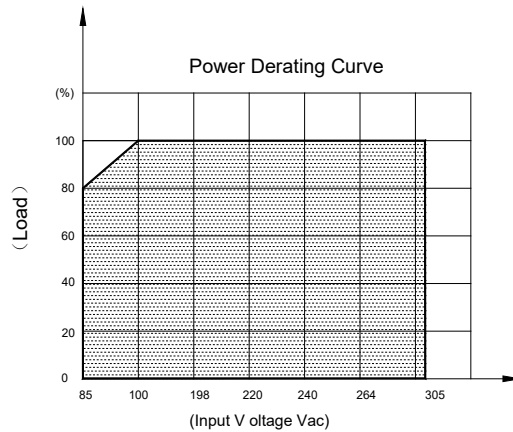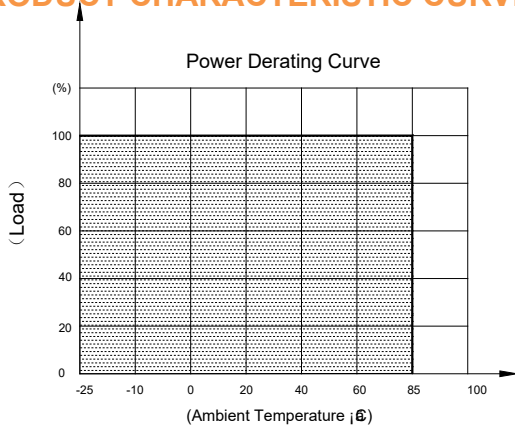


TYPICAL APPLICATION SCHEMATIC

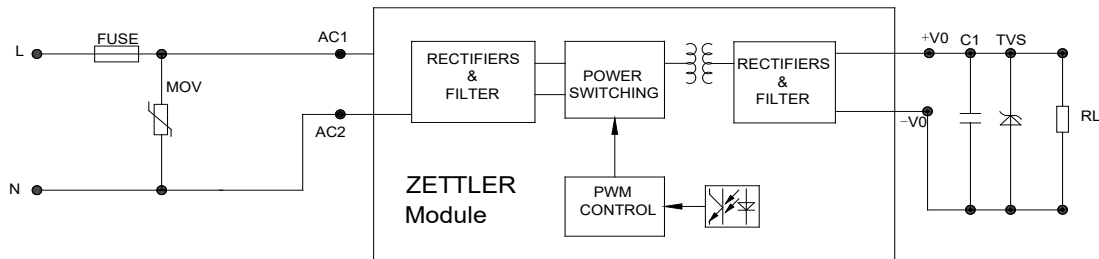

ITEM	MOV	FUSE
1~2W	14D561K	1A/300V
3-10W	14D561K	2A/300V
10~20W	14D561K	3.15A/300V

Note: External circuit components are only recommendations, customers should choose their own components and values according to their specific system application requirements.

MECHANICAL SPECIFICATION

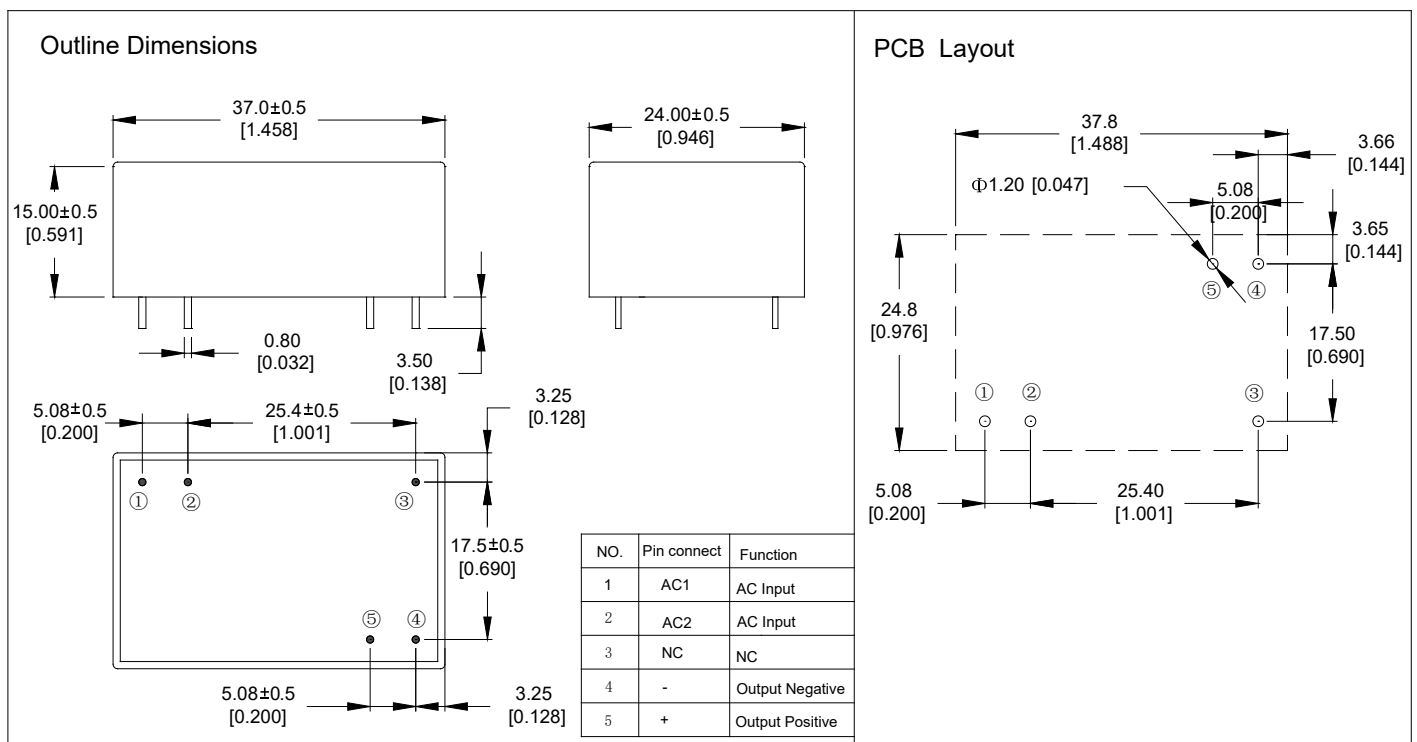

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zettler](#) manufacturer:

Other Similar products are found below :

[AZ1530-08-2](#) [AZ2100-1C-6DE](#) [AZ2110-1A-6D](#) [AZ2111-1C-18D](#) [AZ2428-035-40LUS](#) [AZ2510P2-1A-24D](#) [AZ2693-560-2](#) [AZ2800-2A-6DE](#) [AZ428-035-4H](#) [AZ429-V12-10L](#) [AZ431-V09-11](#) [AZ439-13-1H](#) [AZ5-5DSE](#) [AZ692-560-2](#) [AZ732-125-2](#) [AZ743-2C-5D](#) [AZ826-2C-24DSE](#) [AZ847P2-24](#) [AZ941-1C-5DE](#) [AZ973-1A-12DC2](#) [AZ973-1C-12DC2](#) [AZ973-1C-24DC1](#) [AZ976-1C-12DE](#) [AZ988-1CT-12DC1](#) [AZ2150-1A-6D](#) [AZ2428-56-40LUS](#) [AZ2428-V80-201](#) [AZ2700-2A-12D](#) [AZ420-40-40L](#) [AZ420-40-40LUS](#) [AZ428-1011-4T](#) [AZ428-70-40H](#) [AZ428-V10-4H](#) [AZ429-V05-10L](#) [AZ531-045-1](#) [AZ6-4CH-24D](#) [AZ725-1C-12DE](#) [AZ762-1C-115AF](#) [AZ762-1C-48DEF](#) [AZ830-4C-5DSEA](#) [AZ420-70-40L](#) [AZ733-2C-24DA](#) [A2428-221-201](#) [AZ164-4C-9D](#) [AZ2110-1A-70D](#) [AZ2110-1A-9D](#) [AZ2110-1C-6D](#) [AZ2110-1C-70D](#) [AZ2111-1A-18D](#) [AZ2280-1C-24D](#)